

G02B

OPTICAL ELEMENTS, SYSTEMS, OR APPARATUS (**G02F** takes precedence; measuring-instruments, see the relevant subclass of **G01**, e.g. optical rangefinders **G01C**; testing of optical elements, systems, or apparatus **G01M 11/00**; spectacles **G02C**; sound lenses **G10K 11/30**; electron and ion "optics" **H01J**; X-ray "optics" **H01J**, **H05G 1/00**; optical elements structurally combined with electric discharge tubes **H01J 5/16**, **H01J 29/89**, **H01J 37/22**; microwave "optics" **H01Q**; combination of optical elements with television receivers **H04N 5/72**; heating arrangements specially adapted for transparent or reflecting areas **H05B 3/84**; {optical apparatus **42H**})

Definition statement

This place covers:

Passive optical elements and systems, i.e. elements and systems which are not based on the optical properties of the material used being altered by the application of an external field.

In particular:

- Optical elements characterised by the material of which they are made
- Simple or compound lenses
- Optical elements other than lenses (e.g. prisms, diffusers, mirrors, diffraction gratings, filters, polarisers)
- Light guides; Structural details of arrangements comprising light guides and other optical elements, e.g. couplings (Note: to be dealt with in a further FCR document relating to **G02B 6/00**)
- Mountings, adjusting means, or light-tight connections, for optical elements
- Optical objectives or lens systems characterised both by the number of the optical components and their arrangements according to their sign, i.e. + or -
- Optical objectives specially designed for specific purposes
- Optical objectives with means for varying the magnification, e.g. zoom lenses
- Systems with reflecting surfaces, with or without refracting elements, i.e. catadioptric or catoptric systems
- Optical condensers
- Microscopes
- Telescopes, e.g. binoculars; Periscopes; Instruments for viewing the inside of hollow bodies
- Eyepieces (e.g. for telescopes, microscopes); Magnifying glasses
- Optical devices or arrangements using movable or deformable optical elements

Relationships with other classification places

Whereas **G02B** relates to passive optics, "active" optics, i.e. where the optical properties of the material used in the optical device are altered by the application of an external field (e.g. electro-optical devices, magneto-optical devices, LCDs) is covered by **G02F**.

References

Limiting references

This place does not cover:

Optical rangefinders	G01C
Testing of optical systems	G01M 11/00
Optical benches	G01M 11/04

Ophthalmic lenses	G02C
Electron and ion focusing devices	H01J
Xray optics	H01J
Microwave and Terrahertz optics	H01Q
XRay apparatuses	H05G

Application-oriented references

Examples of places where the subject matter of this place is covered when specially adapted, used for a particular purpose, or incorporated in a larger system:

Medical endoscopes	A61B 1/00
Surgical microscopes	A61B 90/36
Optics integrated in LED packages	H01L 33/58
Optics of laser cavities	H01S
Combination of optical elements with television receivers	H04N 5/72
Heating arrangement for transparent or reflecting areas	H05B 3/84

Informative references

Attention is drawn to the following places, which may be of interest for search:

Hand, pocket, or shaving mirrors	A45D 42/00
Household mirrors	A47G 1/00
Apparatus for testing the eyes	A61B 3/00
Treatment for or protection of the eyes, e.g. protective goggles	A61F 9/00
Optical toys	A63H 33/22
Applying liquid films (e.g. spin coating)	B05D 1/00
Working by laser beam, e.g. welding, cutting, boring	B23K 26/00
Grinding, polishing - lenses, gratings etc.	B24B 13/00
Producing optical elements from plastics	B29D 11/00
Layered products	B32B
Printing using a scanning light deflector	B41J 2/471 , G06K 15/12
Diffraction/holographic structures on credit cards	B42D 25/00
Vehicle mirrors (e.g. rear-view, side-view)	B60R 1/00
Optical micromechanical (MEMS) devices	B81B
Pressing lenses from molten glass	C03B 11/08
Surface treatment of glass by coating	C03C 17/00
Liquid crystals per se	C09K 19/00
Coating in general (CVD, sputtering etc.)	C23C
Supports, stands, frames in general	F16M
Refractors for light sources	F21V 5/00
Reflectors for light sources	F21V 7/00

Filters for light sources	F21V 9/00
Solar heat collectors	F24J 2/00
Sighting devices for weapons	F41G 1/00
Interferometers	G01B 9/02
Measuring microscopes	G01B 9/04
Surveying	G01C
Spectrometry	G01J 3/00
Investigating or analysing materials by the use of optical means	G01N 21/00
Scanning probe techniques, e.g. near field microscopy	G01Q
Systems using reflection of light e.g. lidar	G01S 17/00
Spectacles, sunglasses, contact lenses	G02C
Liquid crystal cells (e.g. LCDs)	G02F 1/13
Photography	G03B
Projection screens	G03B 21/56
Photosensitive materials	G03C 1/00
Photolithography	G03F 7/00
Fourier/Laplace transform optics, correlation	G06E 3/003
Optics of barcode scanners	G06K 7/10831
Laser printers	G06K 15/12 , B41J 2/471
Record carriers with diffractive/holographic structures	G06K 19/16
Holograms on banknotes	G07D 7/0013
Control arrangements or circuits for displays (other than CRTs)	G09G 3/00
Recording or reproducing by optical means, e.g. optical disks	G11B 7/135
Adjusting position or attitude, e.g. level, of instruments	G12B 5/00
Casings; Housings; Cabinets; Supports etc.	G12B 9/00
X-ray optics, gamma ray optics	G21K 1/06
Plasma display panels	H01J 17/49 , H01J 2217/49292
Optical arrangements associated with CRTs (e.g. AR means)	H01J 29/89
Electron or particle beam optics, e.g. electron microscopes	H01J 37/00
Electroluminescent OLED displays	H01L 27/32
Light concentrating means for solar cells	H01L 31/054
Optics of microwaves, millimetre waves etc.	H01Q 15/00
WDM [wavelength division multiplexing] systems	H04J 14/02
Facsimile transmission	H04N 1/00
TV cameras	H04N 5/225
Projection TV	H04N 5/74
Colour projection TV	H04N 9/3197
Stereoscopic TV	H04N 13/00

Special rules of classification

- The IPC groups **G02B11/00** - **G02B11/34** are not used for classification of incoming documents in ECLA, the subject-matter is covered by [G02B 9/00](#) and subgroups and [G02B 13/00](#) and subgroups.
- Other IPC classes which are not used for classification are:
- [G02B 7/185](#) - [G02B 7/198](#) (subject-matter covered by [G02B 7/182](#) and subgroups),
- [G02B 27/18](#) (subject-matter covered in [H04N](#) and [G03B](#)), and
- [G02B 27/24](#) (subject-matter covered by [G02B 27/22](#) and subgroups).

Indexing Codes in general:

Classification of additional information is mandatory. Assessment is done however on a case by case basis, e.g., a document describing the detailed structure of a wire grid polarizer should be classified in [G02B 5/3058](#), whereas a document describing a display system making explicit use of a wire grid polarizer without providing structural details of the polarizer itself should be given in [G02B 5/3058](#) as an additional invention symbol.

Indexing Codes special cases (outside of the reformed ECLA structure, the following additional sets of Indexing Codes are used):

- The set of Indexing Codes [G02B 2207/00](#) - [G02B 2207/129](#) provide classification entries for "orthogonal" features, i.e. features which may arise in the field in general.
- The set of Indexing Codes under [G02B 27/01](#) provide classification entries to cover further details of subject matter covered by [G02B 27/01](#) and not provided for in its subgroups.

Glossary of terms

In this place, the following terms or expressions are used with the meaning indicated:

Optics, optical	Infrared, visible or ultraviolet optics
Active optics	Optics based on the optical properties of a material used being altered by the application of external energy, e.g. electrical, magnetic, thermal or optical energy
Passive optics	Optics in which the optical properties of a material used are not altered by the application of external energy; external forces may act, however, to alter the shape, position or orientation of an optical element used.
Catoptric	Optical systems involving reflective surfaces only
Catadioptric	Optical systems involving reflective and refractive surfaces
Simple lens or prism	A single lens or prisms
Compound lens or prism	An optical member, the constituents of which either are close together without air-space or are "in broken contact", i.e. with the air-space between the constituents having no essential optical influence;
Objective	A lens or an optical system designed to produce a real image of a real object;
Eyepiece	A lens or an optical system designed to produce a virtual image for viewing by the eye or by another optical system
Front, rear	Determined by looking from the more distant conjugate.

Synonyms and Keywords

In patent documents, the following abbreviations are often used:

LCD	Liquid Crystal Display
MEMS	Micro-Electromechanical System
DMD	Digital Micro-mirror Device

G02B 1/00

Optical elements characterised by the material of which they are made (compositions of optical glasses [C03C 3/00](#); cements for glass [C03C 27/00](#))

Definition statement

This place covers:

Optical elements characterised by the material of which they are made.

- Coatings [G02B 1/10](#)
- by surface treatment [G02B 1/12](#)

References

Limiting references

This place does not cover:

Composition of optical glasses	C03C 3/00
Cements for glass	C03C 27/00

Synonyms and Keywords

In patent documents, the following abbreviations are often used:

CVD	Chemical Vapour Deposition
PVD	Physical Vapour Deposition

G02B 1/10

Optical coatings produced by application to, or surface treatment of, optical elements ([G02B 1/08](#) takes precedence)

References

Informative references

Attention is drawn to the following places, which may be of interest for search:

Reflection coatings	G02B 5/08
Coating of glass in general	C03C 17/00

G02B 1/18

having sub-optical wavelength surface structures designed to provide an enhanced transmittance, e.g. moth-eye structures

References**Informative references**

Attention is drawn to the following places, which may be of interest for search:

Surface plasmon devices	G02B 5/008
Anti-glare structures	G02B 5/08

G02B 1/12

by surface treatment, e.g. by irradiation

References**Informative references**

Attention is drawn to the following places, which may be of interest for search:

Surface treatment of glass by irradiation	C03C 23/0005
---	------------------------------

G02B 3/00

Simple or compound lenses (artificial eyes [A61F 2/14](#); spectacle lenses or contact lenses for the eyes [G02C](#); watch or clock glasses [G04B 39/00](#))

Definition statement

This place covers:

Simple or compound lenses including arrays.

References**Limiting references**

This place does not cover:

Artificial eyes	A61F 2/14
Ophthalmic lenses	G02C
Watch or clock glasses	G04B 39/00

G02B 5/00

Optical elements other than lenses (light guides [G02B 6/00](#); optical logic elements [G02F 3/00](#))

Definition statement

This place covers:

Optical elements other than lenses, e.g. prisms, diffusers, mirrors, diffraction gratings, filters, polarisers, light absorbing elements, diaphragms, surface plasmon devices or birefringent or phase retarding elements

Relationships with other classification places

Filters for plasma panel displays are classified under [H01J](#) and in [H01J 2217/49292](#). A further classification in [G02B 5/20](#) is optional.

References

Limiting references

This place does not cover:

Light guides	G02B 6/00
Optical logic elements	G02F 3/00

Glossary of terms

In this place, the following terms or expressions are used with the meaning indicated:

Mirror	device for which the essential characteristic is maximum reflectivity over a given spectral range. A reflecting layer in a mirror is defined as a layer adapted to play a role in the reflection of light, and thus it does not refer to other layers having essentially no reflective function, e.g. protective layers
Filter	device for which the essential characteristic is spectral selectivity, i.e. not only the spectral range passed (for example, by transmission, reflection) but also the spectral range rejected (for example, by absorption, transmission, reflection)

Synonyms and Keywords

In patent documents, the following abbreviations are often used:

FSS	frequency selective surface
-----	-----------------------------

G02B 5/04

Prisms

Definition statement

This place covers:

Optical elements being prisms

G02B 5/08

Mirrors {(vehicle mirrors involving special optical features [B60R 1/08](#))}

Definition statement

This place covers:

Optical elements being mirrors

References**Limiting references**

This place does not cover:

Vehicle mirrors as such	B60R 1/08
-------------------------	---------------------------

G02B 5/204

{in which spectral selection is performed by means of a conductive grid or array, e.g. frequency selective surfaces (for use with wavelengths longer than the infra-red light [H01Q 15/0006](#))}

Definition statement

This place covers:

Filters in which the spectral filtering is performed by a conductive grid or mesh. The background is that for microwave optics, there has long existed a technique in which a conductive periodic pattern (a so-called "frequency selective surface" or FSS) is used to select a particular set of frequencies. For microwaves they are found in the subgroup [H01Q 15/0006](#). In recent years this technique has been extended to IR and even visible wavelengths. It is these types of filters (and only these) which should go into [G02B 5/204](#). Basically they look something like this:

3643704

Nummer: 36 43 704
 Int. Cl. 4: G 02 B 5/26
 Anmeldetag: 20. Dezember 1986
 Offenlegungstag: 30. Juni 1988




Fig. 1




Fig. 2

References

Limiting references

This place does not cover:

Frequency filtering for aerials	H01Q 15/0006
---------------------------------	------------------------------

Special rules of classification

[G02B 5/204](#) is not to be used for classifying normal spectral filters which just happen to have some additional conducting elements for other purposes not to do with spectral selection. In particular it is not for filters having a conductive EM shielding layer or a conductive louvre light blocking grid attached. For such arrangements, the following places may be appropriate:

- [G02B 2207/121](#) - Antistatic or EM shielding layer
- [G02B 2207/123](#) - Optical louvre elements, e.g. for directional light blocking
- [G02B 1/116](#) - Multilayer inorganic AR coatings having a conducting layer light [F21V](#)

G02B 5/32

Holograms used as optical elements

References

Application-oriented references

Examples of places where the subject matter of this place is covered when specially adapted, used for a particular purpose, or incorporated in a larger system:

Scanning systems using holograms, e.g. holographic scanners	G02B 26/106
---	-----------------------------

Informative references

Attention is drawn to the following places, which may be of interest for search:

Processes or apparatus for producing holograms	G03H
--	----------------------

Glossary of terms

In this place, the following terms or expressions are used with the meaning indicated:

HOE	Holographic optical element
-----	-----------------------------

G02B 6/00

Light guides

Definition statement

This place covers:

Light guides per se, coupling light guides and mechanical protection of light guides.

The term "light" as used in [G02B 6/00](#) refers to visible, infrared and ultraviolet light only.

The group covers the optical and mechanical aspects of light guides and light guide coupling, including the coupling of light into, out of and between light guides, as well as positioning, holding and protecting the light guides. This includes optical cables and arrangements for handling optical

cables. The group covers the manufacture of some light guides, in particular optical waveguides of the integrated circuit kind.

The group covers light guides for illumination.

Light guides occur in many areas of technology. To avoid unnecessary double classification, the implementation of light guides in optical systems and instruments for which specific entries exist elsewhere (for example in surgical instruments or for chemical sensing) are not generally given a secondary class in [G02B 6/00](#). This applies particularly to systems and instruments where light guide use is well established. The brief mention of a light guide does not in itself justify classifying in [G02B 6/00](#). Exceptionally, where an optical aspect of the light guide coupling of general interest is disclosed, such a secondary class may be given. A class in [G02B 6/00](#) is always given where a passive light guide per se has been specially adapted.

Relationships with other classification places

"Active" optics, i.e. where the optical property of the light guide or of an optical element coupled to the light guide is altered by the application of an external field are classified in [G02F](#).

Backlights characterised by the light guides for liquid crystal display panels are classified in [G02B 6/0001](#) - [G02B 6/0096](#).

Light amplifying light guides are classified in [H01S](#).

Systems for communication are classified in [H04](#), in particular optical transmission systems in general are classified in [H04B 10/00](#), optical multiplex systems are classified in [H04J 14/00](#), and optical switching systems are classified in [H04Q 11/0001](#). Network and system aspects are classified in [H04](#) and not in [G02B 6/00](#). Light guide arrangements as components, modules or subsystems of communication systems are classified in [G02B 6/00](#); "in the box" aspects are classified in [G02B 6/00](#). For example modules based on light guides for coupling, splitting, mixing, switching and dispersion compensation are classified in [G02B 6/00](#).

References

Limiting references

This place does not cover:

Organic materials for light guides	G02B 1/045
Manufacture of plastic optical fibres	B29D 11/00663
Manufacture of glass optical fibres	C03B 37/01
Glass compositions for optical fibres	C03C 13/04
Process of coating of optical fibres	C03C 25/10
Testing of light guide systems	G01M 11/30

Application-oriented references

Examples of places where the subject matter of this place is covered when specially adapted, used for a particular purpose, or incorporated in a larger system:

Endoscopes using optical fibres for illumination	G02B 23/2469
Endoscopes with light guides	G02B 23/26
Medical endoscopes	A61B 1/00
Surgical instruments	A61B 18/22
Devices for illuminating a surgical field	A61B 90/36
Sensing by attenuation	G01D 5/353

Measuring temperature using optical fibre gratings	G01K 11/3206
Measuring force or strain using an optical fibre	G01L 1/246
Investigating or analysing materials	G01N 21/00

Informative references

Attention is drawn to the following places, which may be of interest for search:

Christmas trees	A47G 33/04
Surveying of bore holes	E21B 47/123
Variable effect lighting	F21S 10/005
Measuring vibrations or sonic waves	G01H 9/004
Indicating arrangements using optical fibre ends	G09F 9/305
Scanners with light guides for illumination	H04N 1/02855

Special rules of classification

The primary protective coating immediately surrounding the cladding of an optical fibre is considered to be a component of an optical fibre and is thus classified in the [G02B 6/02](#) subgroup. Further layers around the optical fibre are considered to form optical cables and are thus classified in [G02B 6/44](#) and subgroups. This definition is also used to decide on the subgroup to be used for classifying a coupling. For example a clamp for an optical fibre is classified in [G02B 6/36](#) whereas a clamp for an optical cable is classified in [G02B 6/4471](#).

Light guides for illumination	G02B 6/0001 - G02B 6/0096
Optical fibres with or without a coating	G02B 6/02 - G02B 6/08 , G02B 6/102 , G02B 6/105 , G02B 6/14
Waveguides of the integrated circuit kind	G02B 6/12 - G02B 6/14 , G02B 6/102 , G02B 6/105 , G02B 6/107
Subwavelength diameter waveguides	G02B 6/107
Other waveguides	G02B 6/10
Optical cables	G02B 6/44 - G02B 6/4438 , G02B 6/4479 - G02B 6/4498

The following arrangement is observed for the coupling aspects of the various types of light guides:

Coupling light guides for illumination	G02B 6/0001 - G02B 6/0096
Coupling of optical fibres	G02B 6/24 - G02B 6/43
Coupling waveguides of the integrated circuit kind	G02B 6/12 - G02B 6/14 , G02B 6/26 , G02B 6/30 , G02B 6/34 , G02B 6/3596 , G02B 6/42 , G02B 6/43
Coupling subwavelength diameter waveguides	G02B 6/107
Coupling of other waveguides	G02B 6/10 , G02B 6/26 , G02B 6/34 , G02B 6/4298
Coupling, installation and handling of optical cables	G02B 6/4439 - G02B 6/4478 , G02B 6/4495 , G02B 6/4497 , G02B 6/46 - G02B 6/54
Storage of optical fibres	G02B 6/4439

Polarisation aspects

The following arrangement is observed in relation to polarisation aspects of light guides and light guide couplings

Polarisation maintaining optical fibres	G02B 6/024
Polarisation issues within light guides per se, including optical fibres and planar waveguides (not polarisation maintaining optical fibres)	G02B 6/105
Polarisation manipulation by planar waveguide coupling	G02B 6/126
Polarisation manipulation by optical fibre coupling	G02B 6/27 - G02B 6/2793
Polarisation manipulating elements between light guides and optoelectronic elements	G02B 6/4215 , G02B 6/4246

Wavelength selective aspects

The following arrangement is observed in relation to wavelength aspects of light guides and light guide couplings

Wavelength affecting properties of optical fibres (e.g. performance and mounting of single gratings or filters in optical fibre, dispersion tailoring)	G02B 6/02 - G02B 6/03694 , especially G02B 6/02052 - G02B 6/02209 and G02B 6/02214 - G02B 6/02285
Wavelength selective elements (e.g. gratings, filters) in planar waveguides	G02B 6/122 - G02B 6/138 , especially G02B 6/124 , and G02B 6/12007 - G02B 6/12033
Coupling of planar waveguides for wavelength selection	G02B 6/12007 - G02B 6/12033
Coupling of optical fibres for wavelength selection	G02B 6/293 - G02B 6/29398
Wavelength selective elements between light guides and optoelectronic elements	G02B 6/4215 , G02B 6/4246

Indexing Codes are used in some subgroups related particularly to coupling aspects to indicate additional details not available for the particular type of light guide, for example [G02B 6/293](#) - [G02B 6/29398](#) are assigned to waveguides of the integrated circuit kind with wavelength selective elements in addition to [G02B 6/12007](#).

The Indexing Codes corresponding to [G02B 6/0001](#) - [G02B 6/001](#) and [G02B 6/0096](#) are in [F21V 2200/00](#).

Indexing Codes with additional detail compared to the subgroups exist in various parts of [G02B 6/00](#), including [G02B 6/032](#), [G02B 6/02123](#), [G02B 6/2804](#), [G02B 6/36](#), [G02B 6/4292](#) and [G02B 6/4296](#).

[G02B 2006/0098](#) is assigned to light guides for scanning in addition to the appropriate invention group which depends on the type of light guide.

An Indexing Code is occasionally given as a tag to the implementation of light guides in optical systems which are not covered by [G02B 6/00](#) for assisting awareness of the existence of the related subclasses.

Glossary of terms

In this place, the following terms or expressions are used with the meaning indicated:

Planar waveguides	waveguides of the integrated circuit kind
-------------------	---

G02B 6/0001

{specially adapted for lighting devices or systems (lighting or signalling on vehicles using light guides [B60Q 1/00](#); lighting devices for vehicle dashboards [B60Q 3/10](#); lighting devices for vehicle interior using light guides [B60Q 3/62](#); lighting devices mounted on the vehicle rear part using light guides [F21S 48/2225](#); measuring arrangements having light conducting pointers [G01D 13/265](#); illumination of liquid crystal displays [G02F 1/1336](#); illuminated signs [G09F 13/00](#))}

Definition statement

This place covers:

Aspects of the light guides for illumination per se as well as light coupling aspects.


Further details of subgroups

[G02B 6/0016](#)

Illustrative example of the subject matter classified in this group:

Patent Application Publication Oct. 21, 2004 Sheet 5 of 7 US 2004/0207775 A1


FIG. 7

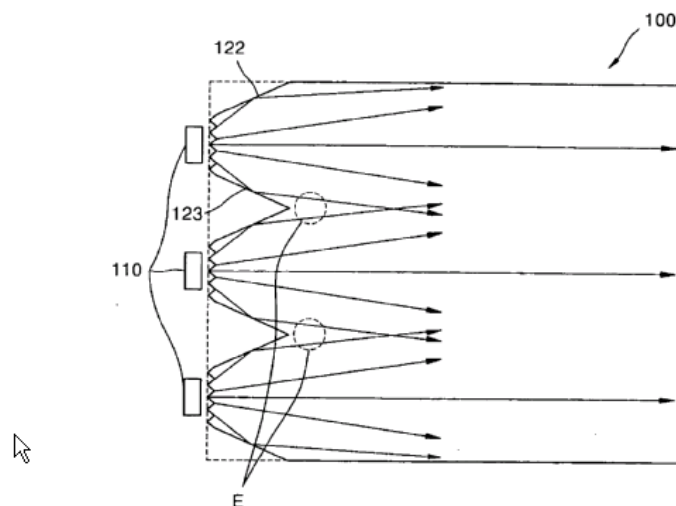

Grooves in the light input face of light guide 100. (Source US2004/0207775 A1).

[G02B 6/0018](#)

Illustrative example of the subject matter classified in this group:

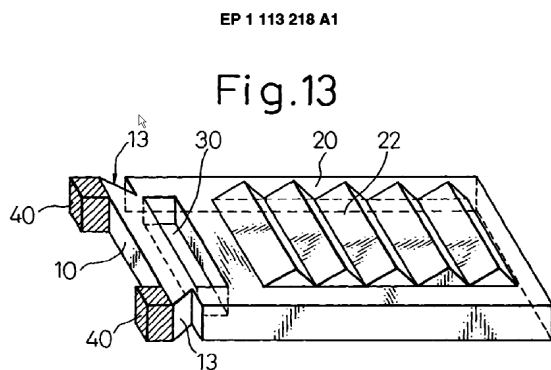


Redirecting reflective surfaces 13. (Source EP1113218 A1).

[G02B 6/002](#)

Illustrative example of the subject matter classified in this group:

WO 2004/104476

PCT/DK2004/000352

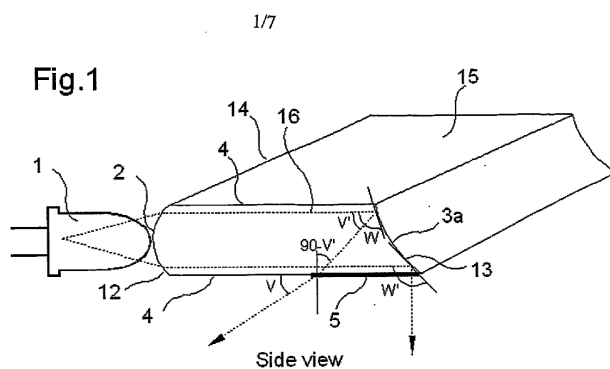


Input face 2 shaped as a lens surface. (Source WO 2004/104476).

[G02B 6/0021](#)

Illustrative example of the subject matter classified in this group:

EP 1 666 936 A1

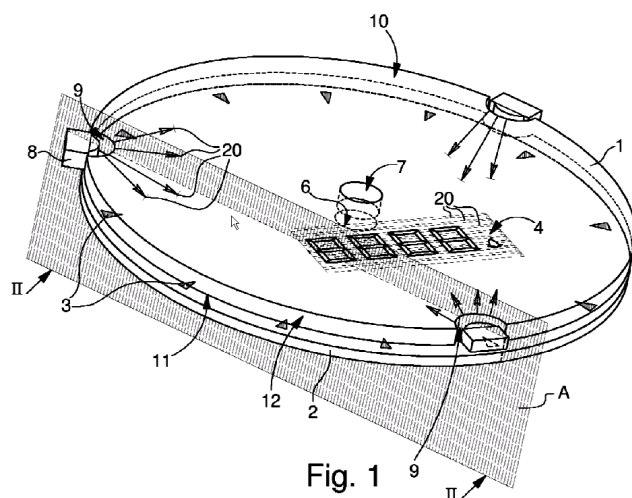


Recesses 9 in the light guide housing the light sources 8. (Source EP1666936 A1).

[G02B 6/0025](#)

Illustrative example of the subject matter classified in this group:

FIG. 9

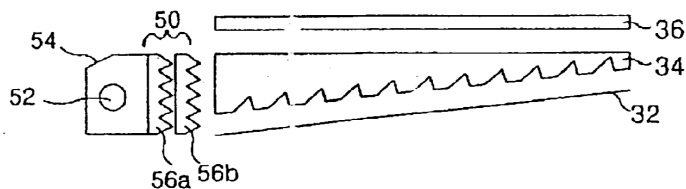


US 2003/0117793 A1

Prismatic sheets 56a, 56b between light source 52 and light guide 34. (Source US2003/0117793 A1).

[G02B 6/0026](#)

Illustrative example of the subject matter classified in this group:

US 2006/0002678 A1

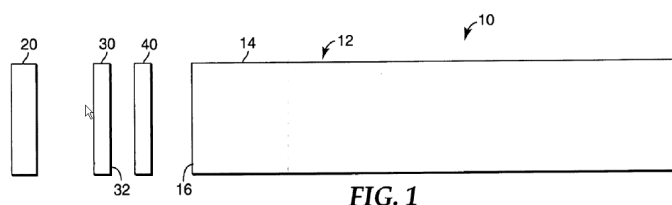

Interference reflector 30 as wavelength selective element between light source 20 and light guide 12. (Source US2006/0002678 A1).

[G02B 6/0028](#)

Illustrative example of the subject matter classified in this group:

Patent Application Publication Jan. 12, 2006 Sheet 1 of 3

US 2006/0007702 A1


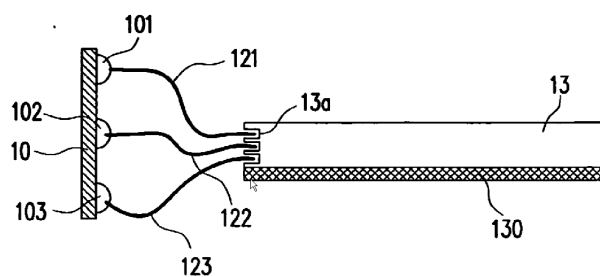


FIG. 1a

Intermediate light guides (optical fibers 121, 122, 123) for coupling into light guide plate 13. (source US2006/0007702 A1).

EP 1 139 015 A1

FIG. 1

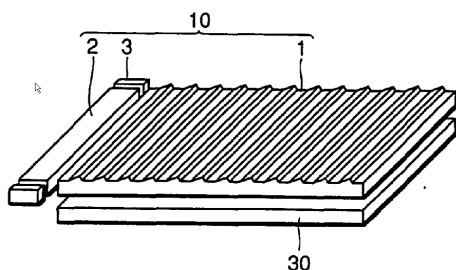


Intermediate light guide rod 2 with sideways coupling into light guide 1. (Source EP 1139015 A1).

[G02B 6/003](#)

Illustrative example of the subject matter classified in this group:

FIG. 2

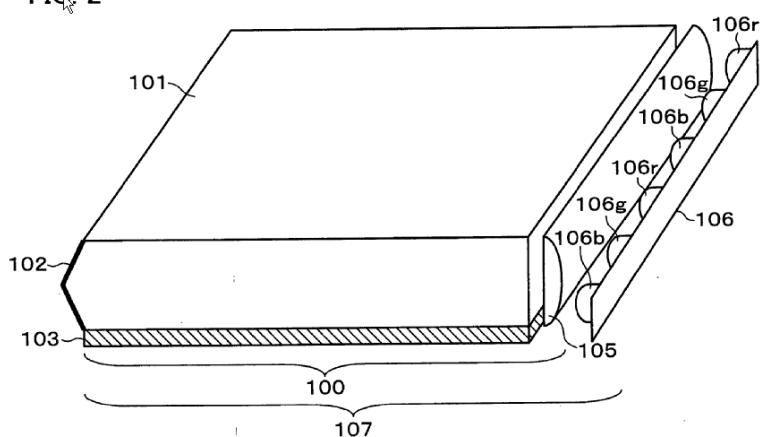


EP 1 574 780 A1

Intermediate lens 105, also used for lens sheets. (Source EP 1574780 A1)

[G02B 6/0031](#)

Illustrative example of the subject matter classified in this group:

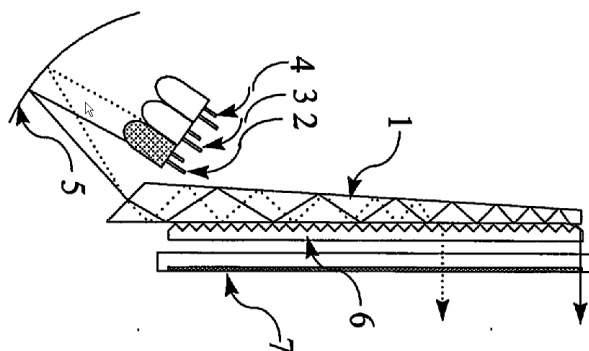

Reflector 5. (Source WO2004/109380).

[G02B 6/0036](#)

Illustrative example of the subject matter classified in this group:

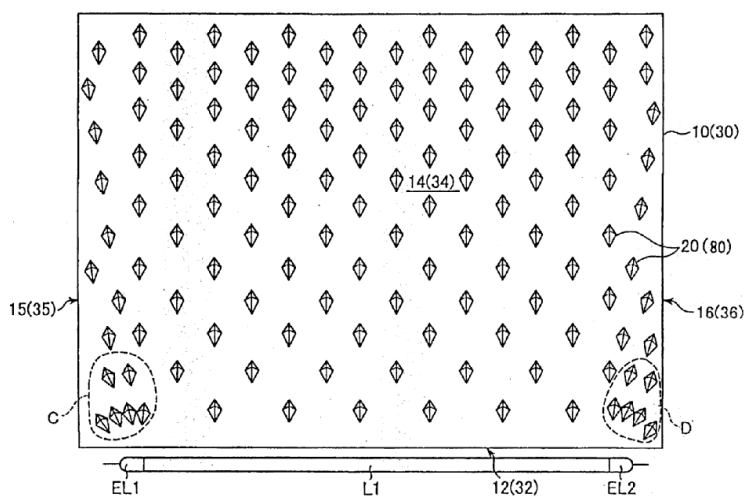


Fig.2

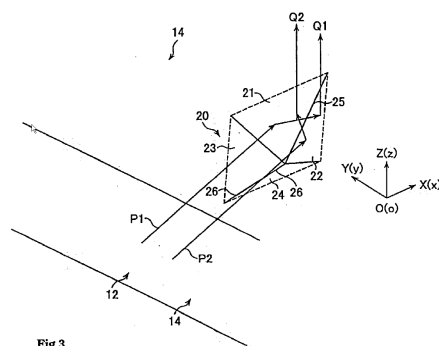


Fig.3

Protrusions 20 arranged in a 2D-array (applied for both regular and irregular arrays). (Source US2003/0156403 A1).

[G02B 6/0038](#)

WO 2004/109380

Application Publication Aug. 21, 2003 Sheet 2 of 17 US 2003/0156403 A1

Illustrative example of the subject matter classified in this group:

EP 0 939 273 A1


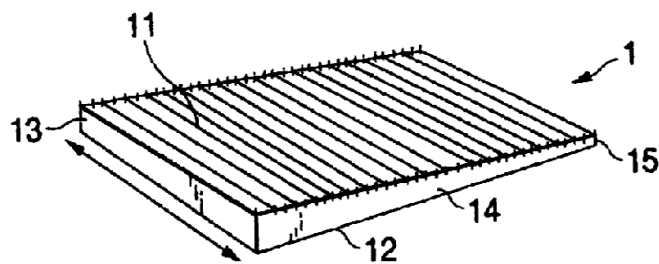


FIG.3A

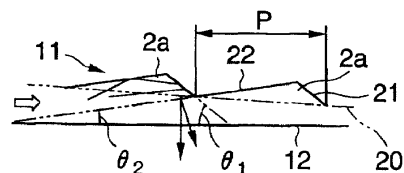



Grooves 11. (Source EP 939273 A1)

[G02B 6/0041](#)

Illustrative example of the subject matter classified in this group:

(54) Title: LAMP SYSTEM


WO 2005/024478 A1

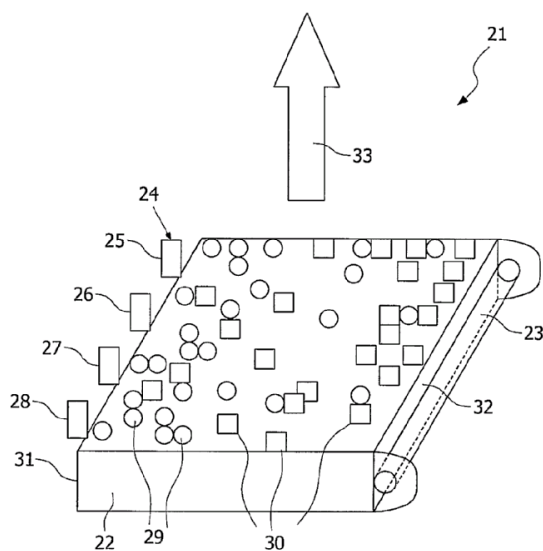

Scattering particles 29, 30 in the bulk. (Source WO2005/024478).

[G02B 6/0043](#)

Illustrative example of the subject matter classified in this group:

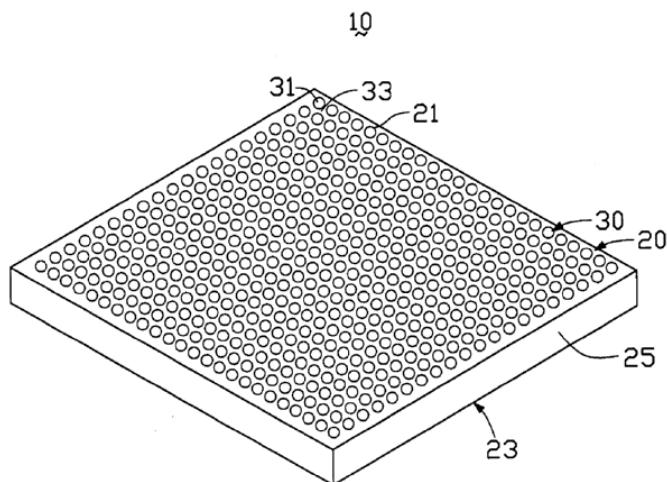


Scattering dots 31 on the surface of the light guide 20. (Source US 2004/0228109 A1).

[G02B 6/0046](#)

Illustrative example of the subject matter classified in this group:

WO 2005/080863

PCT/JP2005/003087

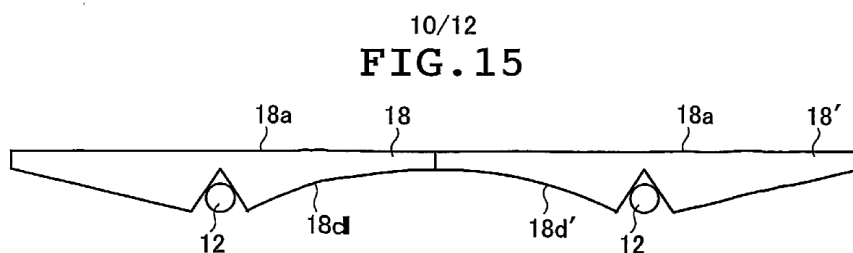

Variation of the thickness of light guide plates. (Source WO2005/080863).

[G02B 6/0048](#)

Illustrative example of the subject matter classified in this group:

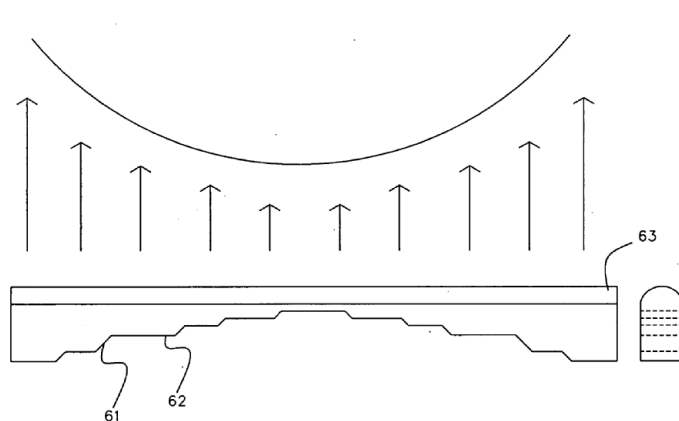


Figure 6

Application Publication Nov. 10, 2005 Sheet 6 of 7 US 2005/0248950 A1

Stepped variation of the thickness of light guide plates. (source US2005/0248959 A1).

[G02B 6/005](#)

The mere indication that a diffusion film, a prism film or a reflecting film is present does not justify classifying in [G02B 6/005](#) and its subclasses. At least some details of these elements have to be given in the document.


[G02B 6/0051](#)

Illustrative example of the subject matter classified in this group:

Fig. 6



Fig. 10



Diffusion film 14. (Source EP 1677047 A1).

[G02B 6/0053](#)

Illustrative example of the subject matter classified in this group:

WO 2005/026793

PCT/US2004/029603

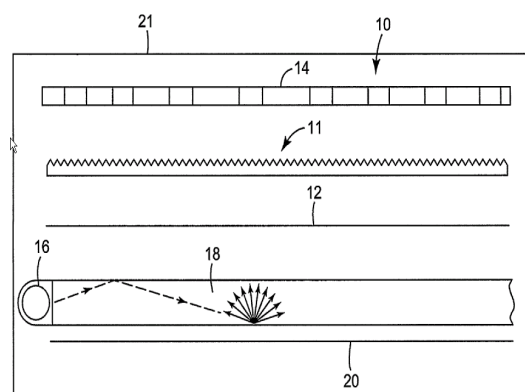


FIG. 1

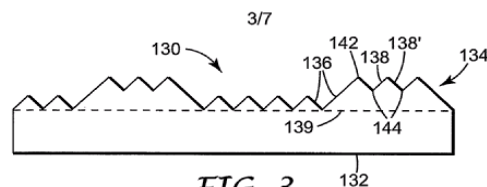


FIG. 3




FIG. 4


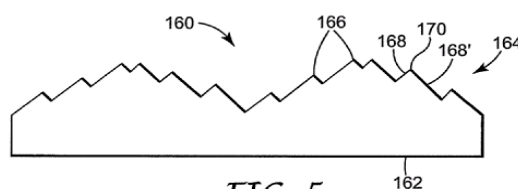


FIG. 5

Prism film 11. (Source WO2005/026793).

[G02B 6/0055](#)

Illustrative example of the subject matter classified in this group:

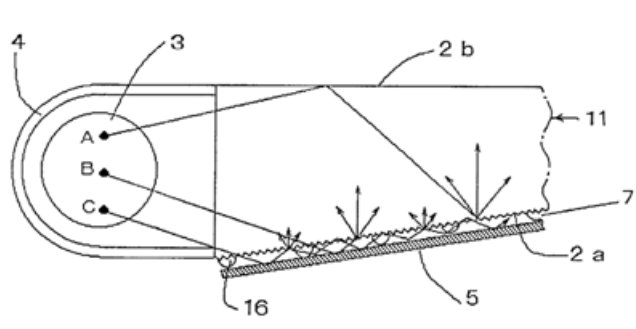


Reflection sheet 5. (Source US 6,486,931 B1).

[G02B 6/0056](#)

Illustrative example of the subject matter classified in this group:

EP 0 597 261 A1

FIGURE 1

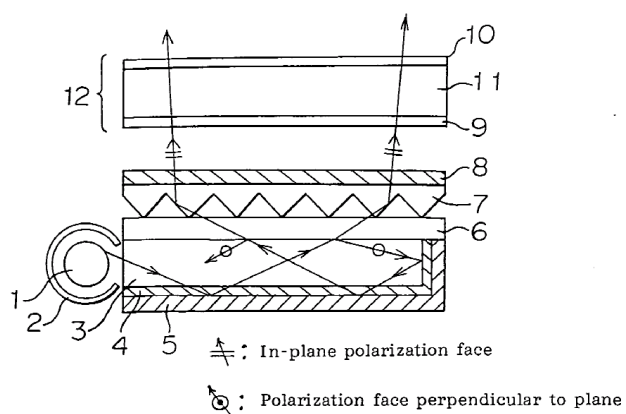

(Source EP 0597261 A1).

[G02B 6/006](#)

Illustrative example of the subject matter classified in this group:


U.S. Patent

Dec. 8, 1998

Sheet 1 of 4

5,846,070

FIG 1

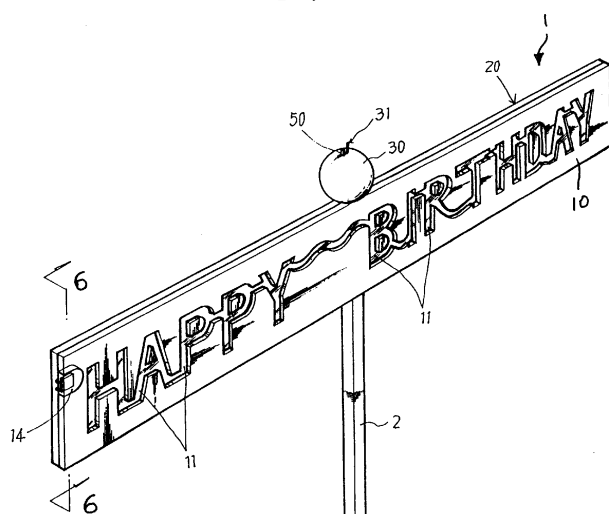


Variations purposely generating inhomogeneous light output, e.g. to display indicia or text. (Source US 5,846,070).

[G02B 6/0061](#)

Illustrative example of the subject matter classified in this group:

Patent Application Publication Jul. 15, 2004 Sheet 1 of 5 US 2004/0136173 A1

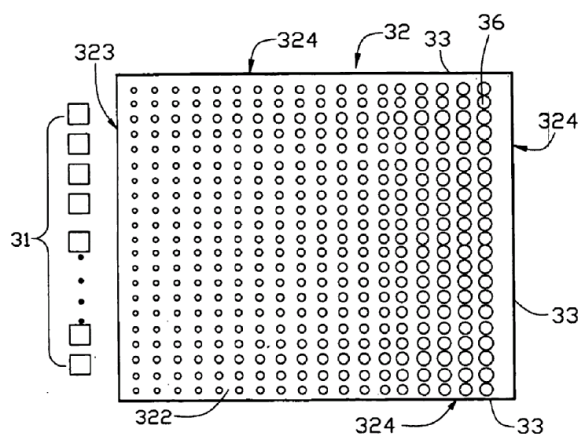


Variations (dot size) to compensate non-uniformities of light propagating in the light guide, so as to achieve homogeneous output intensity. (Source US2004/0136173 A1).

[G02B 6/0063](#)

Illustrative example of the subject matter classified in this group:

(10) **DE 10 2004 038 344 A1** 2005.02.17

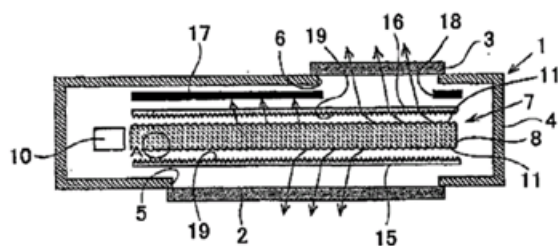

Light exits through top and bottom surfaces. (Source

DE102004038344 A1).


[G02B 6/0065](#)

Manufacturing and material aspects of light guides having one of the features classified in [G02B 6/0033](#) and [G02B 6/0013](#) and lower.

Note: when classifying in this group, classification must also be made in one or more of the groups of [G02B 6/0013](#) or [G02B 6/0033](#) for the related device aspects

Illustrative example of the subject matter classified in this group:

US 2003/0210539 A1

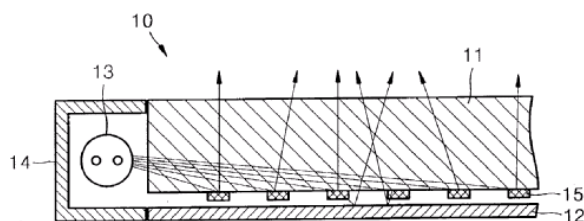


The invention relates to the manufacturing apparatus for surface light source apparatus 10 and includes a pattern design system for designing the light guide pattern portions 15. (Source US 2003/0210539 A1).

[G02B 6/0068](#)

Illustrative example of the subject matter classified in this group:


US 2006/0245210 A1

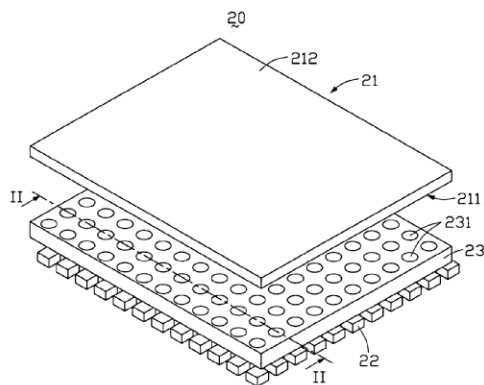

Plural light sources 22. (Source US 2006/0245210 A1).

[G02B 6/007](#)


Illustrative example of the subject matter classified in this group:

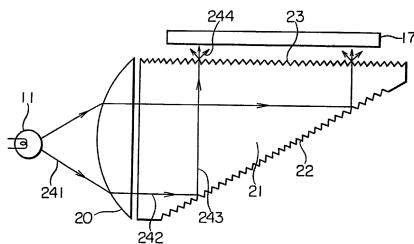

Lamp 11. (Source GB 2180051 A).

[G02B 6/0071](#)

Illustrative example of the subject matter classified in this group:

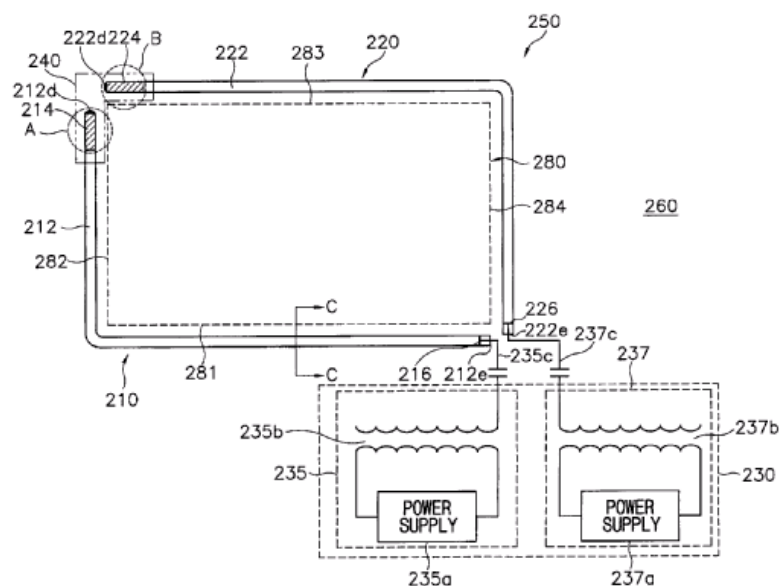


Lamp tubes 212 and 222. (Source US 2003/0198038 A1).

[G02B 6/0073](#)

The mere indication that an LED is used does not justify classifying in this group.

Illustrative example of the subject matter classified in this group:

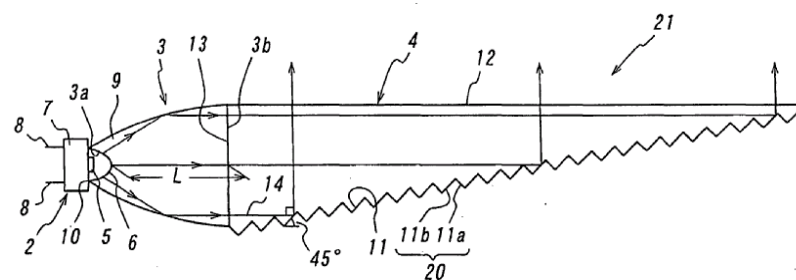


EP 1 434 277 A1

Translucent concave end face 3a has the same curvature as a translucent convex face 6 of the LED lamp 2 (Source EP 1434277 A1).

[G02B 6/0076](#)

Illustrative example of the subject matter classified in this group:

Patent Application Publication Jul. 27, 2006 Sheet 1 of 6 US 2006/0164862 A1


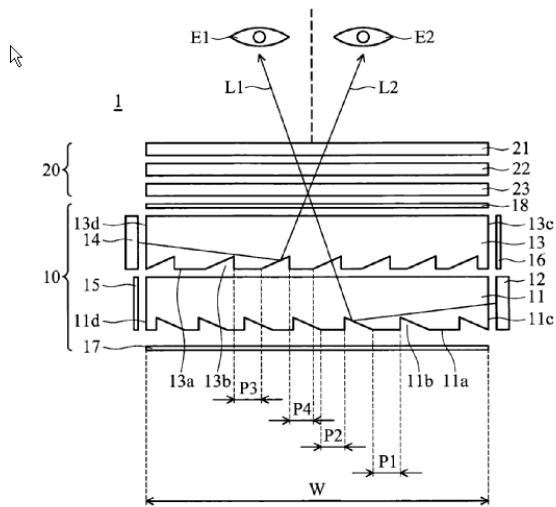


Stacked light guide plates 11 and 13. (Source US 2006/0164862 A1).

[G02B 6/0078](#)

Illustrative example of the subject matter classified in this group:


DE 10 2004 046 256 A1 2006.04.06

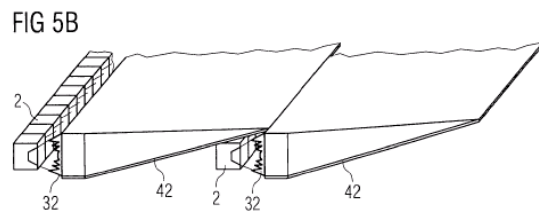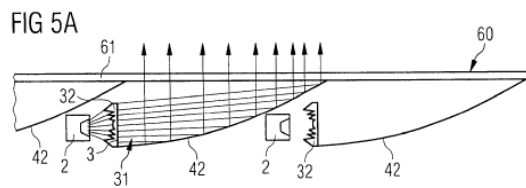

(Source DE 102004046256).

[G02B 6/008](#)


Illustrative example of the subject matter classified in this group:

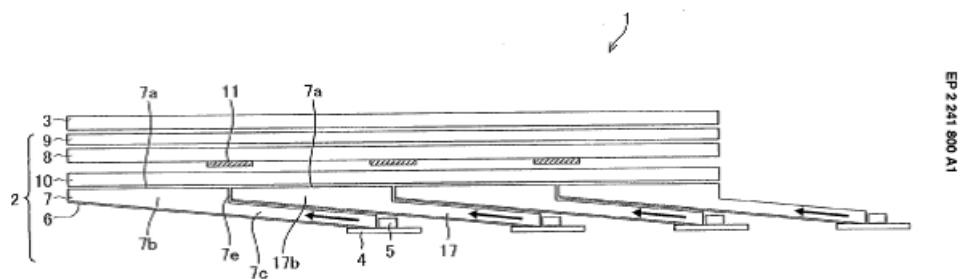

Sections 7b and 7c of adjacent light guides overlap. (Source EP 2241800 A1).

[G02B 6/0083](#)

Illustrative example of the subject matter classified in this group:

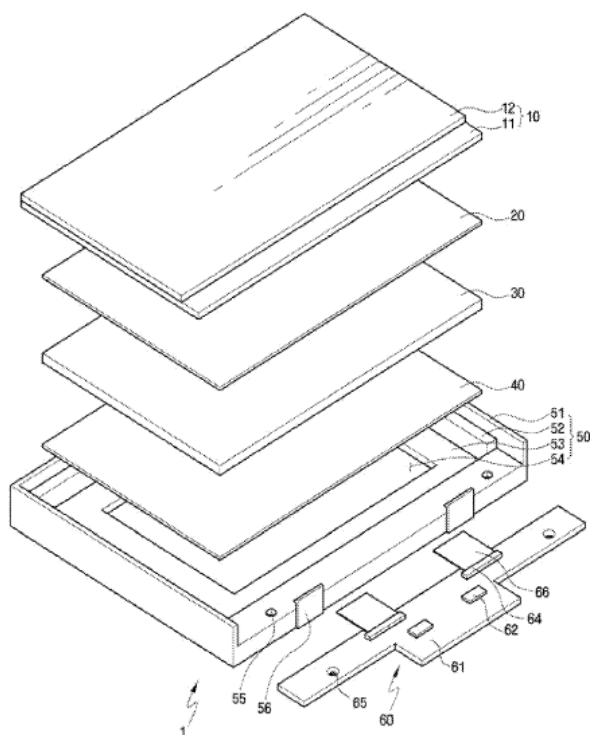


Chips 62, Wiring elements 66. (Source US 2010/0246209 A1).

[G02B 6/0085](#)

Illustrative example of the subject matter classified in this group:

Patent Application Publication Feb. 4, 2010 Sheet 2 of 12 US 2010/0027293 A1

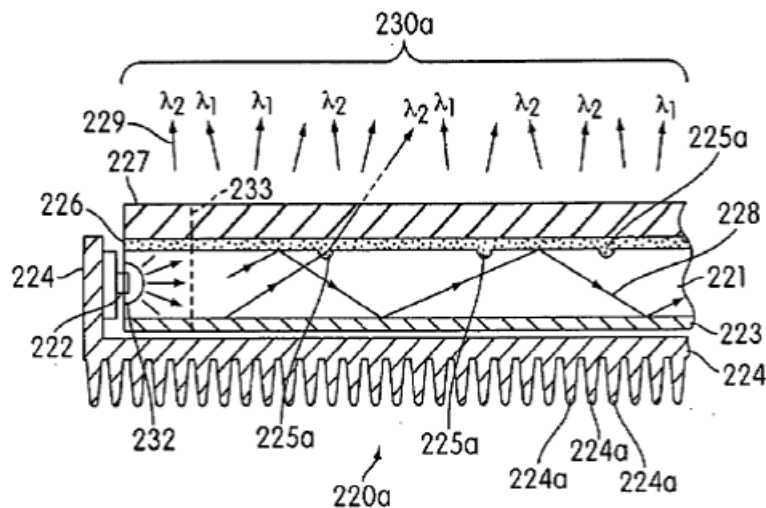


Heat sink 224. (Source US2010/0027293 A1).

G02B 6/0088

Illustrative example of the subject matter classified in this group:

EP 2 259 104 A2

FIG. 5

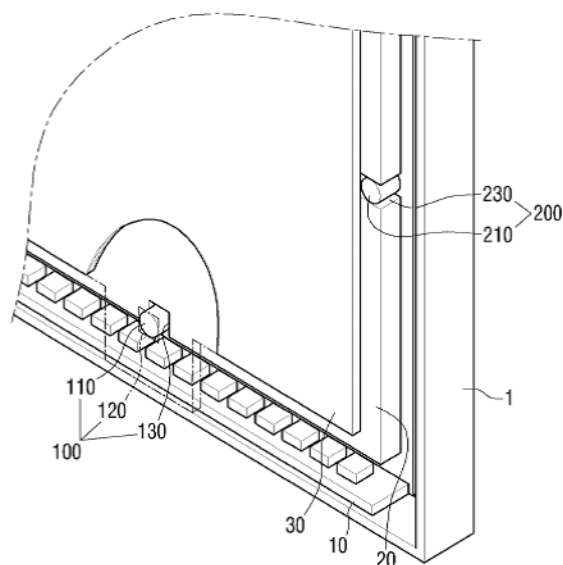

Fixing projections 110, 210 in the housing and support grooves 130, 230 in the light guide for fixing the light guide in the housing. (Source EP 2259104 A2).

[G02B 6/009](#)

Illustrative example of the subject matter classified in this group:

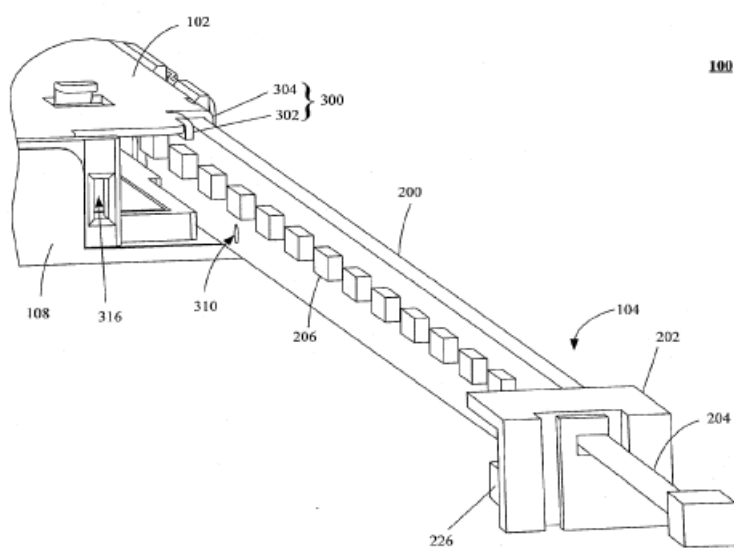


FIG. 4

Patent Application Publication Nov. 26, 2009 Sheet 5 of 6 US 2009/0290381 A1

Guiding structure 300 and securing device 202 for fixing the light source in the housing. (Source US2009/0290381 A1).

[G02B 6/0091](#)

Illustrative example of the subject matter classified in this group:

FIG. 7






FIG. 8

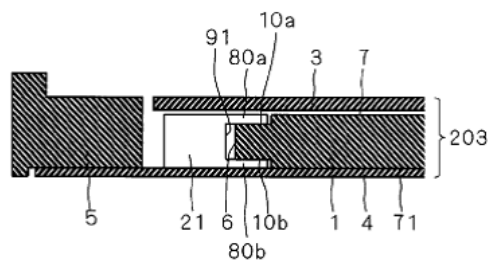

This group is used for devices holding the light source(s) and being directly attached to the light guide, like clamp 8 containing light emitter 9 and being attached to light guide plate 1. (Source US 2007/0285944 A1).

[G02B 6/0093](#)


Illustrative example of the subject matter classified in this group:

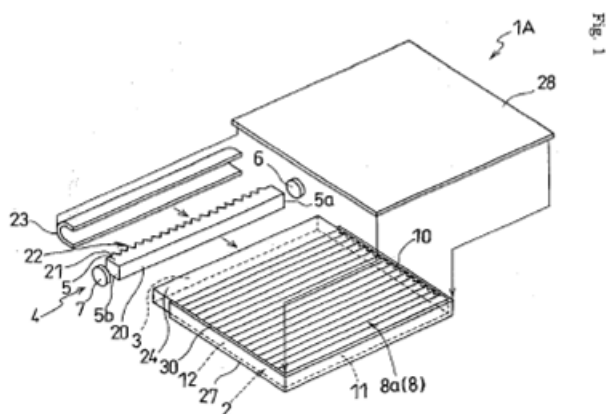


Protective cover 28. (Source EP 1283391 A2).

[G02B 6/0095](#)

Illustrative example of the subject matter classified in this group:

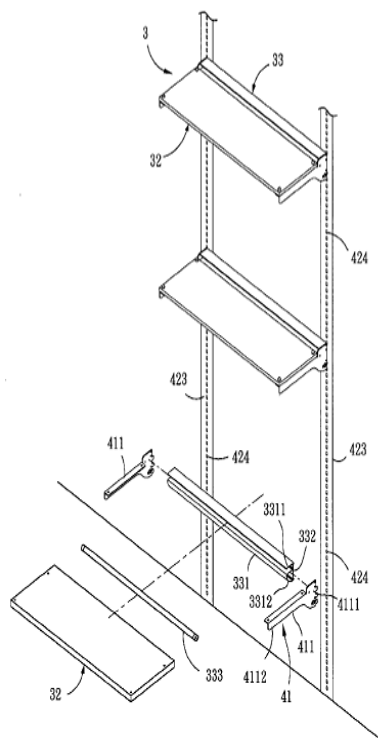

Shelves 32 formed as light guide panels. (Source US 2004/0264161 A1).

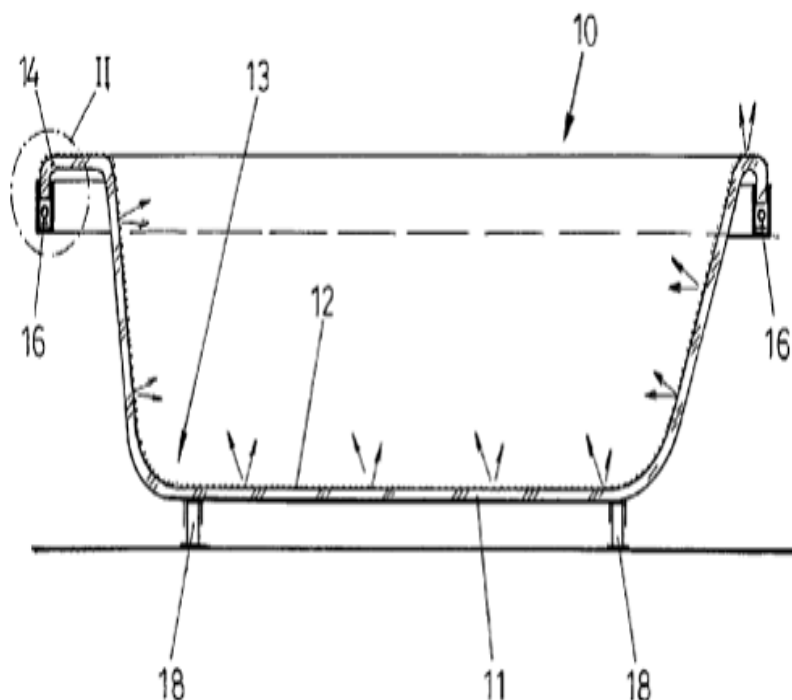

Bath tub with light guide 11 and light source 16. (Source WO 02/100230).

Relationships with other classification places

[G02B 6/0001](#) and subgroups include backlights comprising light guides for liquid crystal display panels. Other aspects (other than the light guide) of liquid crystal display backlights are classified in [G02F 1/1336](#). Direct backlights not including a light guide are classified in [G02F 1/133602](#)

References

Informative references

Attention is drawn to the following places, which may be of interest for search:

Lighting or signalling on vehicles using light guides	B60Q 1/00
Lighting devices for vehicle dashboards	B60Q 3/10
Lighting devices for vehicle interior using light guides	B60Q 3/62
Lighting devices mounted on the vehicle rear part using light guides	F21S 48/2225
Measuring arrangements having light conducting pointers	G01D 13/265
Illumination of liquid crystal displays	G02F 1/1336
Illuminated signs	G09F 13/00

Special rules of classification

Light guides in the form of long rods for illumination are classified in [G02B 6/0005](#) and subgroups. The Indexing Codes corresponding to [G02B 6/0001](#) - [G02B 6/001](#) and [G02B 6/0096](#) are in [F21V 2200/00](#).

G02B 6/02

Optical fibre with cladding {with or without a coating} (mechanical structures for providing tensile strength and external protection [G02B 6/44](#))

Definition statement

This place covers:

Optical and mechanical properties of optical fibres per se as well as optical fibres with an integral optical element, such as a Bragg grating.

Further details of subgroups

[G02B 6/02004](#)

What is considered large or small usually depends on the type of fibre. For example an area of 50 square microns can be considered large for a dispersion compensating fibre (then [G02B 6/02009](#) and [G02B 6/02261](#) should be given) but not large for a non-zero dispersion shifted fibre (i.e. not classified in [G02B 6/02004](#)).


[G02B 6/02033](#)

Graded multimode plastic optical fibres are classified in [G02B 6/02038](#) not [G02B 6/0288](#). Fibres compensating modal dispersion are usually classified in [G02B 6/0288](#) or [G02B 6/02038](#) as they typically involve a graded index multimode fibre. 1 mm core graded POF is classified in [G02B 6/02038](#).

[G02B 6/02214](#)


[G02B 6/02214](#) is for dispersion tailoring only at wavelengths other than around the 1550nm window (e.g. for 850 nm, 1300 nm). [G02B 6/02223](#) is for dispersion tailoring at 1550nm and another wavelength, e.g. 1300 nm, in the same optical fibre.

Illustrative example of the subject matter classified in this group:

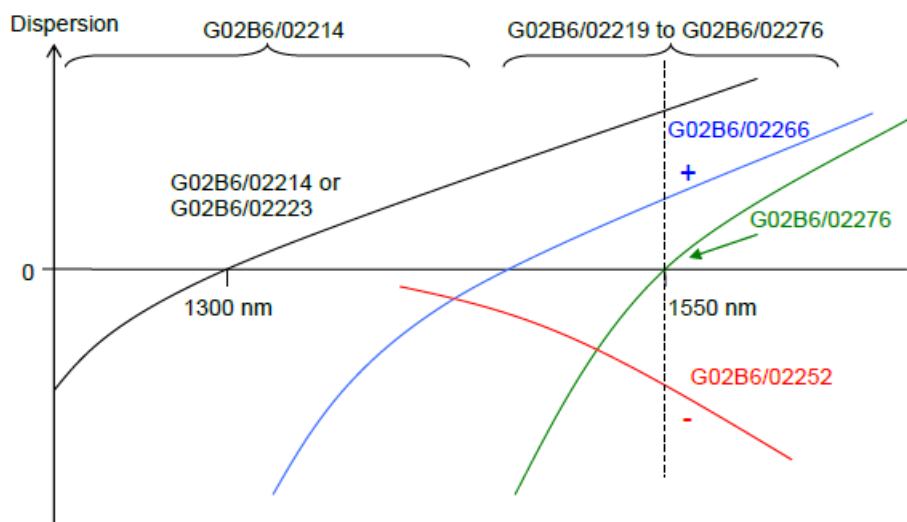

[G02B 6/02233](#)


Illustrative example of the subject matter classified in this group:

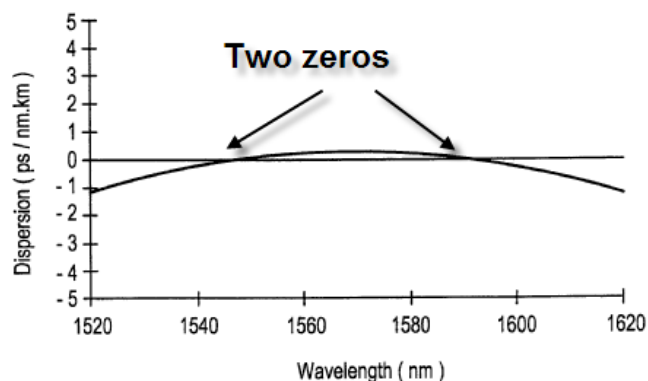

(Source WO9942869).

[G02B 6/02242](#)


Illustrative example of the subject matter classified in this group:

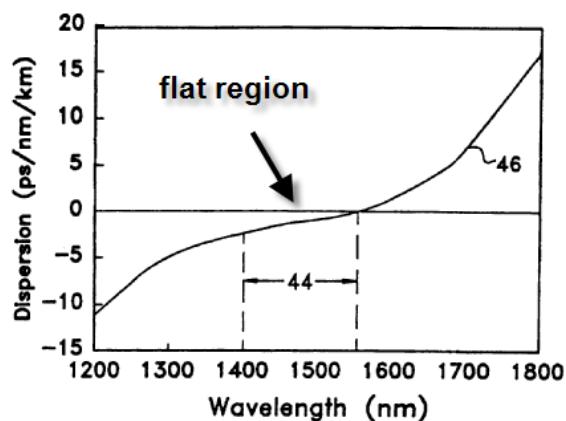

(Source WO9733188).

[G02B 6/02247](#)

Illustrative example of the subject matter classified in this group:

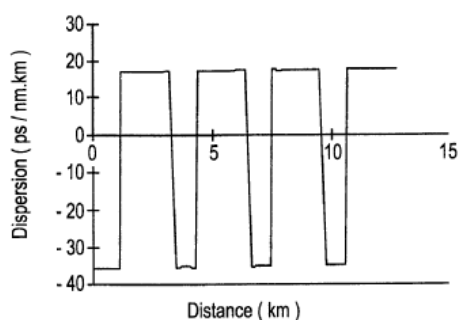


(Source WO9942869).

[G02B 6/028](#)


Graded multimode plastic optical fibres are classified in [G02B 6/02038](#) not [G02B 6/0288](#). Fibres compensating modal dispersion are usually classified in [G02B 6/0288](#) or [G02B 6/02038](#) as they typically involve a graded index multimode fibre. 1 mm core graded POF is classified in [G02B 6/02038](#).

[G02B 6/0285](#)

Illustrative example of the subject matter classified in this group:

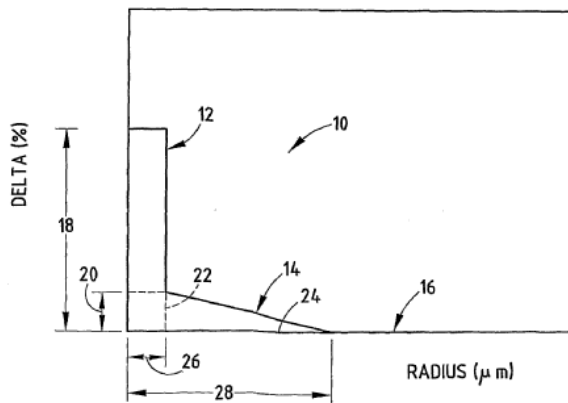

(Source WO03012489).

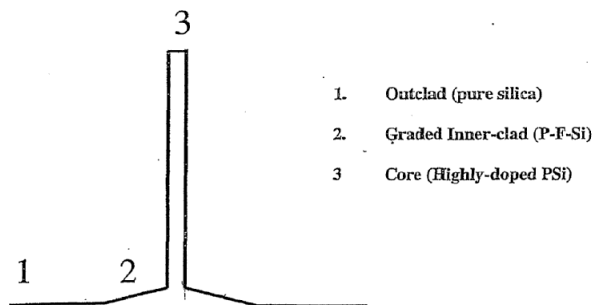


(Source WO02088041).

With reference to the notes to [G02B 6/03616](#), graded inner clad 2 is not considered a layer in the sense of [G02B 6/03616](#). Hence these examples are not for [G02B 6/03633](#).

[G02B 6/036](#)

Some documents define the central core as the segment from the centre to where the refractive index delta is zero (e.g. US6421490 defines "the radius from the waveguide centerline to the location of the last refractive index point is the outer radius of the core segment."). The definition in the [G02B 6/03616](#) notes takes precedence.

The outer cladding is also considered a layer. If the coating affects the guiding due to its refractive index then it is also considered a cladding layer. Care must be taken not to count beyond the external clad e.g. the following example has 2 clad layers, the top figure can be misleading.

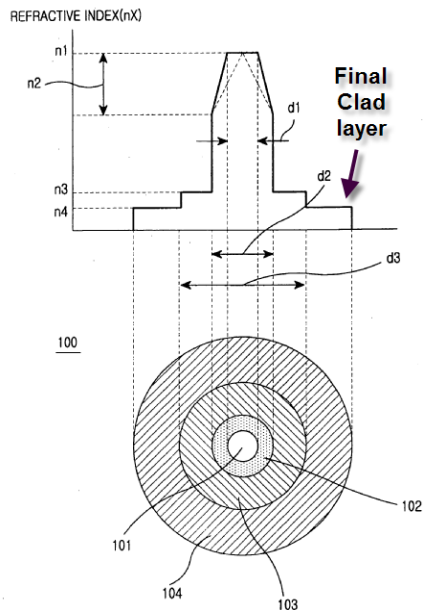

(Source EP1439408).

When the profile shows many alternating refractive index layers possibly [G02B 6/023](#) will be relevant.

[G02B 6/036](#)


Illustrative example of the subject matter classified in this group:



Radial asymmetry concept not reflected in lower subgroups. (Source WO2004023182).

[G02B 6/03605](#)


Illustrative example of the subject matter classified in this group:

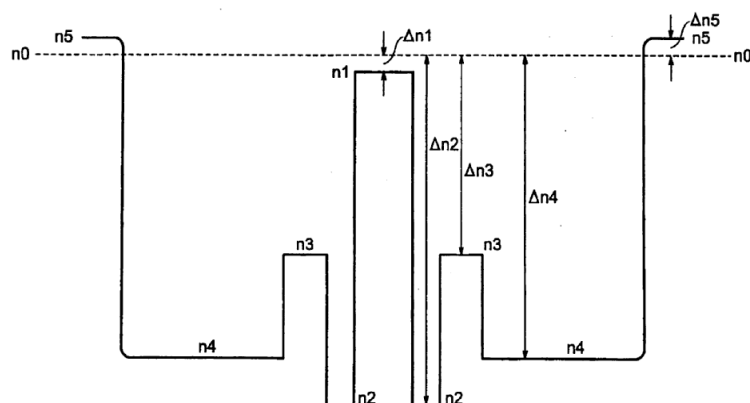

(Source US2005089289).


[G02B 6/03611](#)

Illustrative example of the subject matter classified in this group:

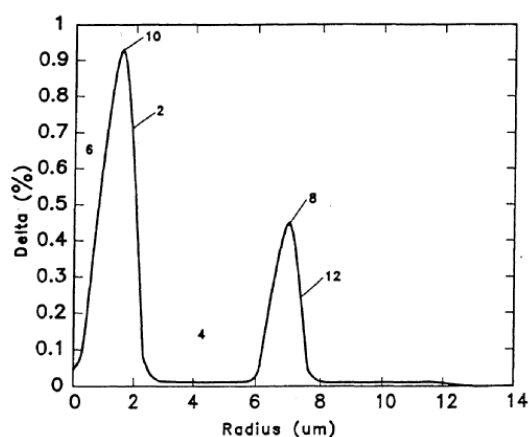

(Source EP1158323).

[G02B 6/03611](#) as additional information is used for some documents where the profile has a centreline depression as a result of the manufacturing procedure but there is no purposeful effect on the guiding properties or dispersion properties.

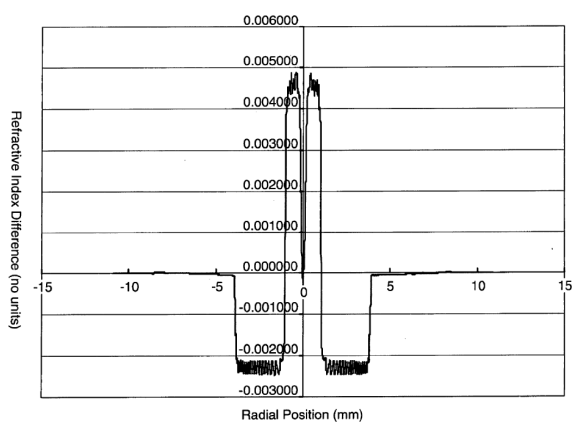


(Source US2006045449).

This is however not classified in [G02B 6/03611](#) Since the centreline dip does not affect the optical fibre properties and it is not discussed in the document in detail.

[G02B 6/03627](#)


Illustrative example of the subject matter classified in this group:

e.g. W profile

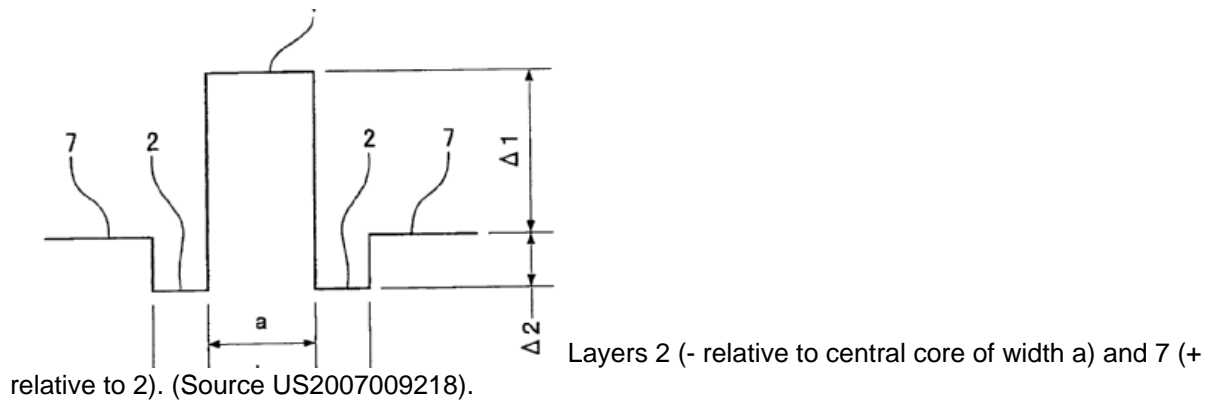


[G02B 6/03633](#)

Illustrative example of the subject matter classified in this group:

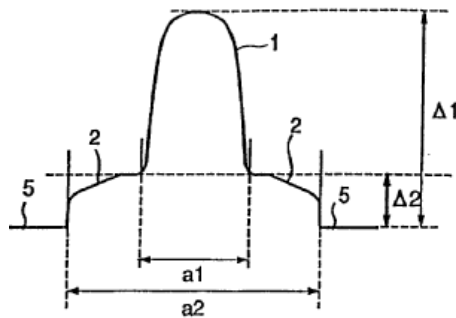


Two layers 2 and 5 around central core segment 1. Layer 2 is a layer in the sense of the [G02B 6/03616](#) definitions, and thus [G02B 6/0285](#) is not appropriate. (Source EP1189082).

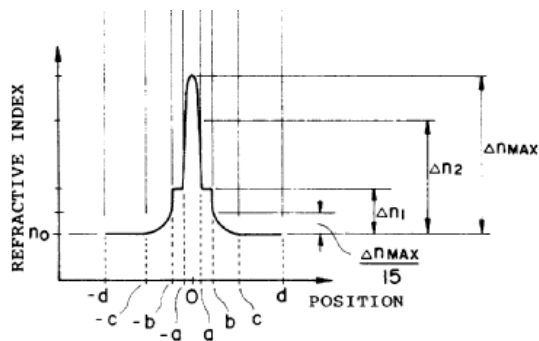

Central core segment between $-a$ and a , first layer (ring) between a and b , second layer (ring) between b and d . (Source EP856754).

[G02B 6/03638](#)

Illustrative example of the subject matter classified in this group:

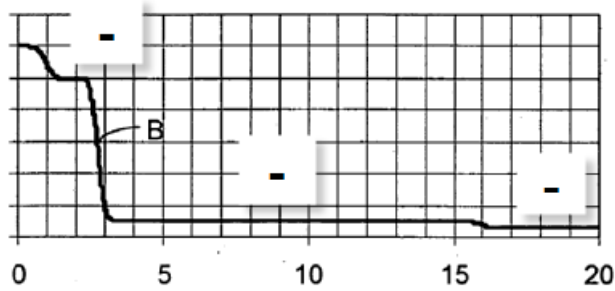


(Source US2007116418).


[G02B 6/03644](#)

Illustrative example of the subject matter classified in this group:

e.g. WT profile

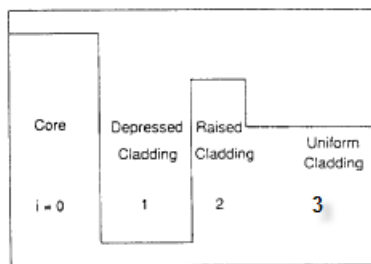


Layer 1 -, layer 2 +, layer 3 -. (Source: Li et al in Optical Engineering, Dec. 1994, Vol. 33, p. 3999 (XP484832)).

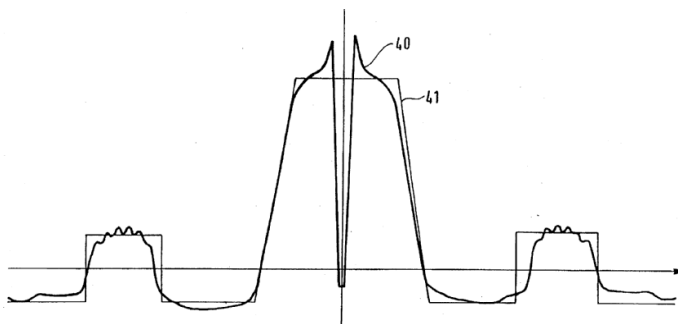

Central core segment 41 (design), 60 (measurement) with three surrounding layers arranged - + -. (Source US5659649).


[G02B 6/0365](#)

Illustrative example of the subject matter classified in this group:

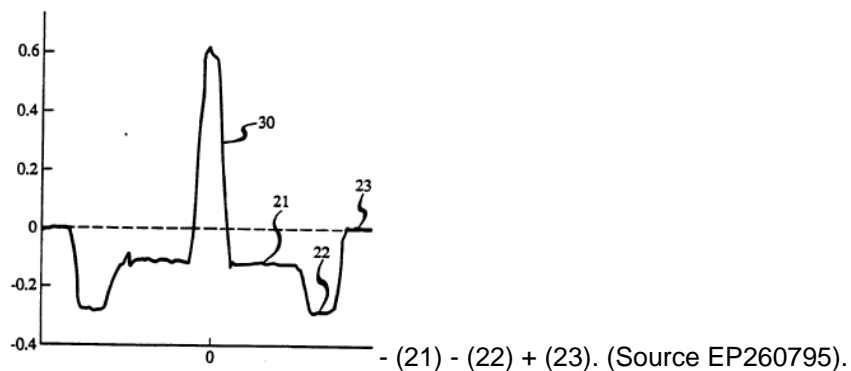


[G02B 6/03655](#)

Illustrative example of the subject matter classified in this group:

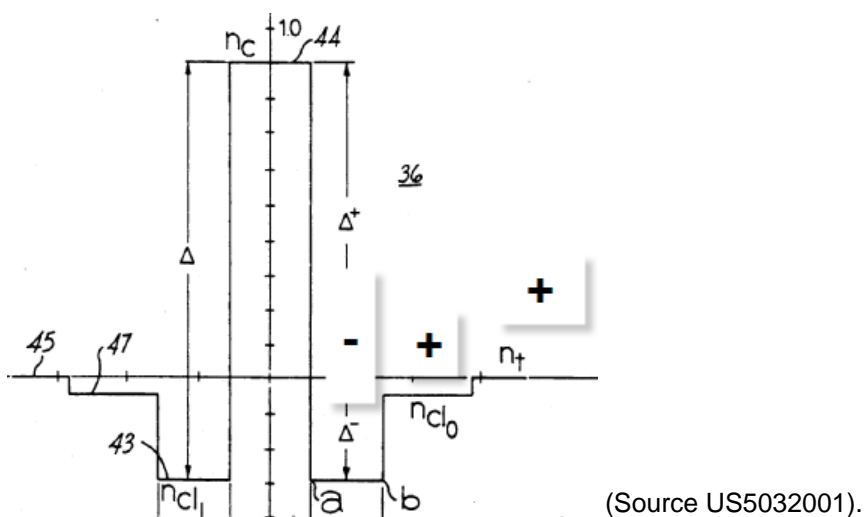


[G02B 6/03661](#)

Illustrative example of the subject matter classified in this group:

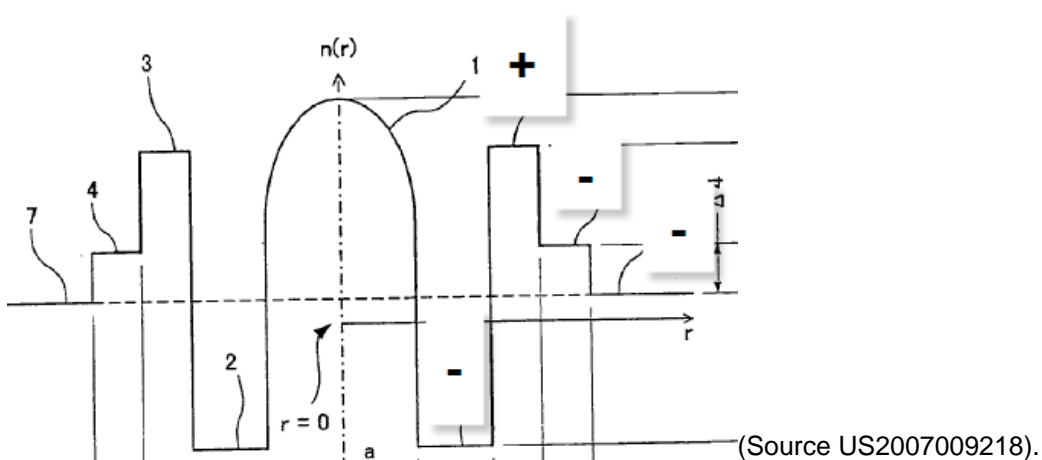

[G02B 6/03666](#)


Illustrative example of the subject matter classified in this group:

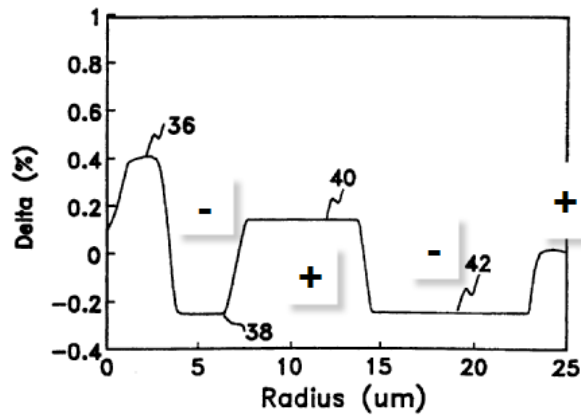

(Source WO9733188).

[G02B 6/03672](#)


Illustrative example of the subject matter classified in this group:

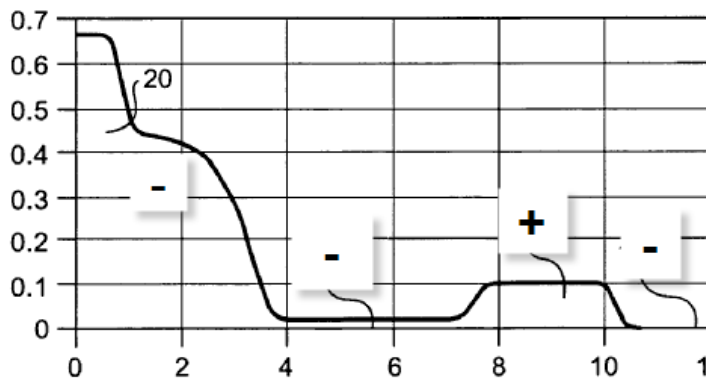

(Source US2004067034).

[G02B 6/03677](#)


Illustrative example of the subject matter classified in this group:

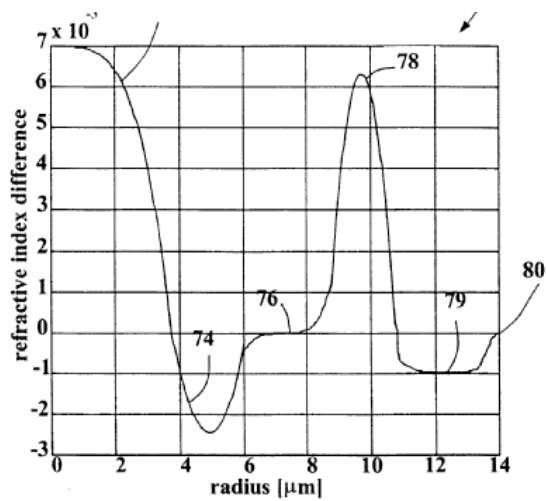

- (74) + (76) + (78) - (79). (Source WO0017680).

[G02B 6/03683](#)


Illustrative example of the subject matter classified in this group:




EP260795: - (21) - (22) + (40) + (41). (Source EP260795).

[G02B 6/03688](#)

Illustrative example of the subject matter classified in this group:

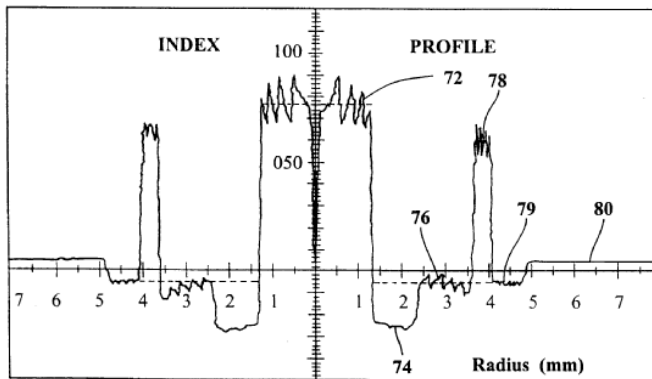


74-80= 5 layers. (Source WO0017680).

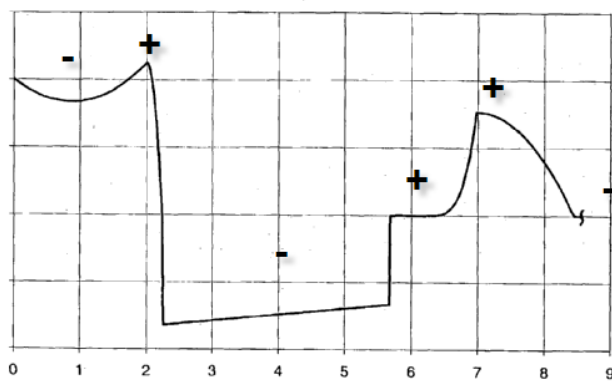


6 layers. (Source US2005013571).

[G02B 6/03694](#)


Illustrative example of the subject matter classified in this group:

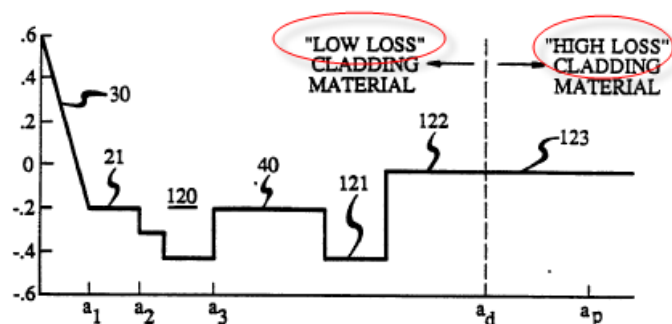

Layers 122 and 123 have the same refractive index but different loss properties. (Source EP0260795).

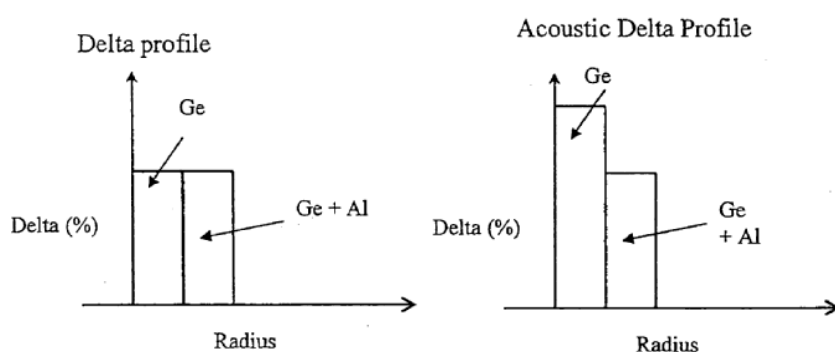

The Ge and Ge+Al have the same refractive index but different acoustic properties. (Source US2007116416).

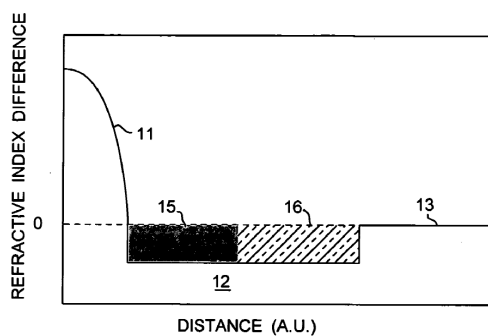

Layers 15 and 16 have the same refractive index but are formed by different methods so that layer 15 has lower losses but takes longer to form. (Source US2007204657).

Indexing Codes

Fluid core or claddings are classified in [G02B 6/032](#) and [G02B 2006/0325](#). No corresponding group exists for Indexing Code [G02B 2006/0325](#).

References

Limiting references

This place does not cover:

Optical fibres for infra-red or ultra-violet radiation	G02B 6/102
Optical fibres having polarisation effects except for polarisation maintaining optical fibres	G02B 6/105

Mechanical structures for providing tensile strength and external protection	G02B 6/44
--	---------------------------

Special rules of classification

All embodiments of patent documents are classified. This is of particular relevance for classifying multilayered optical fibre refractive index profiles in [G02B 6/036](#) - [G02B 6/03694](#).

G02B 6/10

of the optical waveguide type ([G02B 6/02](#), [G02B 6/24](#) take precedence; devices or arrangements for the control of light by electric, magnetic, electro-magnetic or acoustic means [G02F 1/00](#); transferring the modulation of modulated light [G02F 2/00](#); optical logic elements [G02F 3/00](#); optical analogue/digital converters [G02F 7/00](#); stores using opto-electronic devices [G11C 11/42](#), {using electro-optical elements [G11C 13/047](#)} ; electric waveguides [H01P](#); transmission of information by optical means [H04B 10/00](#); multiplex systems [H04J 14/00](#))

References

Limiting references

This place does not cover:

Light guides for illumination	G02B 6/0001
Optical fibres except for infra-red and ultraviolet transmitting optical fibres and optical fibres having polarisation effects	G02B 6/02
Polarisation maintaining optical fibres	G02B 6/024
Optical fibre coupling, and coupling of light guides which are neither of the integrated circuit kind nor for illumination.	G02B 6/24
Devices or arrangements for the control of light by electric, magnetic, electro-magnetic or acoustic means	G02F 1/00
Transferring the modulation of modulated light	G02F 2/00
Optical logic elements	G02F 3/00
Optical analogue/digital converters	G02F 7/00
Electric waveguides	H01P

Informative references

Attention is drawn to the following places, which may be of interest for search:

Probes and tips for near field optical microscopy	G01Q 60/18
Stores using opto-electronic devices	G11C 11/42
Stores using electro-optical elements	G11C 13/047
Transmission of information by optical means	H04B 10/00
Multiplex systems	H04J 14/00

Special rules of classification

Waveguides which are not of the integrated circuit kind, are not optical fibres and are not used for illumination are classified in the subgroups [G02B 6/10](#) - [G02B 6/107](#). There are three exceptions: the subgroups [G02B 6/102](#) and [G02B 6/105](#) include both optical fibres and waveguides of the integrated circuit kind, and [G02B 6/107](#) includes all sub-wavelength diameter waveguides.

G02B 6/12

of the integrated circuit kind (production or processing of single crystals [C30B](#); electric integrated circuits [H01L 27/00](#) {coupling fibres and integrated optical circuits [G02B 6/30](#)})

Definition statement

This place covers:

Light guiding paths in an integrated circuit, particularly waveguides formed in a planar substrate, including single paths as well as multiple paths which interact with each other with or without optical elements in or between the light guiding paths. This subgroup further covers methods of producing the waveguides.

References

Limiting references

This place does not cover:

Photonic crystals not for waveguiding	G02B 1/005
Surface plasmon devices not for light guiding	G02B 5/008
Planar waveguides for infra-red or ultra-violet radiation	G02B 6/102
Planar waveguide paths having polarisation effects	G02B 6/105
Sub-wavelength diameter waveguides	G02B 6/107
Production or processing of single crystals	C30B
Optical analysis of materials by means of surface plasmons	G01N 21/553
Electric integrated circuits	H01L 27/00
Semiconductor devices sensitive to light	H01L 31/00
Semiconductor devices for light emission	H01L 33/00

Informative references

Attention is drawn to the following places, which may be of interest for search:

Coupling fibres and integrated optical circuits	G02B 6/30
---	---------------------------

Special rules of classification

Wavelength selective arrangements are classified in [G02B 6/12007](#) with the corresponding Indexing Code symbols [G02B 6/293](#) - [G02B 6/29398](#) assigned. For example a planar waveguide arrangement of ring resonators for wavelength selection is classified in [G02B 6/12007](#) and [G02B 6/29338](#).

The coupling of light within planar waveguide substrates is classified in [G02B 6/12](#) and subgroups. Coupling light into or out of an integrated circuit having light guiding paths is classified in the appropriate one of [G02B 6/26](#), [G02B 6/30](#) - [G02B 6/305](#), [G02B 6/34](#), [G02B 6/3596](#), [G02B 6/42](#) and [G02B 6/43](#).

Indexing Codes

[G02B 2006/12085](#) - [G02B 2006/12092](#), [G02B 2006/12111](#) and [G02B 2006/12035](#) are inactive, i.e. they contain some documents but are not used for.

Some of the remaining Indexing Codes correspond to groups as shown in the table below.

G02B 6/12007	G02B 2006/12164
G02B 6/1225	G02B 2006/1213
G02B 6/1228	G02B 2006/12195
G02B 6/124	G02B 2006/12107
G02B 6/125	G02B 2006/12104 , G02B 2006/12119 , G02B 2006/12147 , G02B 2006/1215 , G02B 2006/12154 , G02B 2006/12159
G02B 6/131	G02B 2006/12178
G02B 6/1342	G02B 2006/1218
G02B 6/1345	G02B 2006/12183
G02B 6/1347	G02B 2006/12188
G02B 6/136	G02B 2006/12176
G02B 6/138	G02B 2006/1219

The Indexing Codes [G02B 2006/12095](#) - [G02B 2006/12104](#), [G02B 2006/12109](#), [G02B 2006/12114](#) - [G02B 2006/12128](#), [G02B 2006/12135](#) - [G02B 2006/12161](#), [G02B 2006/12169](#), [G02B 2006/12173](#), [G02B 2006/12192](#) and [G02B 2006/12197](#) are used for additional details not listed in the [G02B 6/12](#) subgroups, for example a bent planar waveguide is classified in group [G02B 6/125](#) and with Indexing Code [G02B 2006/12119](#).

The status of the use of the Indexing Codes [G02B 2006/12083](#) - [G02B 2006/12197](#) is shown in the table below:

G02B 2006/12083	Inactive
G02B 2006/12085	Inactive
G02B 2006/12088	Inactive
G02B 2006/1209	Inactive
G02B 2006/12092	Inactive
G02B 2006/12095	Additional detail
G02B 2006/12097	Additional detail
G02B 2006/121	Additional detail
G02B 2006/12102	Additional detail
G02B 2006/12104	Additional detail
G02B 2006/12107	G02B 6/124
G02B 2006/12109	Additional detail
G02B 2006/12111	Inactive
G02B 2006/12114	Additional detail

G02B 2006/12116	Additional detail
G02B 2006/12119	Additional detail
G02B 2006/12121	Additional detail
G02B 2006/12123	Additional detail
G02B 2006/12126	Additional detail
G02B 2006/12128	Additional detail
G02B 2006/1213	G02B 6/1225
G02B 2006/12133	Inactive
G02B 2006/12135	Additional detail
G02B 2006/12138	Additional detail
G02B 2006/1214	Additional detail
G02B 2006/12142	Additional detail
G02B 2006/12145	Additional detail
G02B 2006/12147	Additional detail
G02B 2006/1215	Additional detail
G02B 2006/12152	Additional detail
G02B 2006/12154	Additional detail
G02B 2006/12157	Additional detail
G02B 2006/12159	Additional detail
G02B 2006/12161	Additional detail
G02B 2006/12164	G02B 6/12007
G02B 2006/12166	Inactive
G02B 2006/12169	Additional detail
G02B 2006/12173	Additional detail
G02B 2006/12176	G02B 6/136
G02B 2006/12178	G02B 6/131
G02B 2006/1218	G02B 6/1342
G02B 2006/12183	G02B 6/1345
G02B 2006/12188	G02B 6/1347
G02B 2006/1219	G02B 6/138
G02B 2006/12192	Additional detail
G02B 2006/12195	G02B 6/1228
G02B 2006/12197	Additional detail

G02B 6/24

Coupling light guides (for electric waveguides [H01P 1/00](#))

References

Limiting references

This place does not cover:

Coupling of light guides of the planar or plate like form for lighting devices or systems	G02B 6/0011
Electric waveguides	H01P 1/00

Special rules of classification

Mechanical coupling aspects of optical elements other than the light guides is classified in the subgroup relating to the optical coupling. For example the mechanical coupling of a fixed reflective bulk diffraction grating between optical fibres is classified in [G02B 6/2931](#), and mechanical means for holding a lens between an optical fibre and an opto-electronic element are classified in [G02B 6/4204](#).

The mechanical coupling of light guides is classified in [G02B 6/36-G02B 6/406](#) and/or [G02B 6/42-G02B 6/43](#). When the mechanical coupling is for a particular type of optical coupling between light guides then the appropriate one of [G02B 6/26-G02B 6/3596](#) is also given. For example a lens coupling together light guides which are mechanically coupled on a substrate is classified in [G02B 6/36](#) - [G02B 6/3696](#) and [G02B 6/32](#).

G02B 6/26

Optical coupling means ([G02B 6/36](#), [G02B 6/42](#) take precedence)

Definition statement


This place covers:

The optical coupling of light into, out of or between light guides.

Further details of subgroups

[G02B 6/29302](#)

Illustrative example of the subject matter classified in this group:

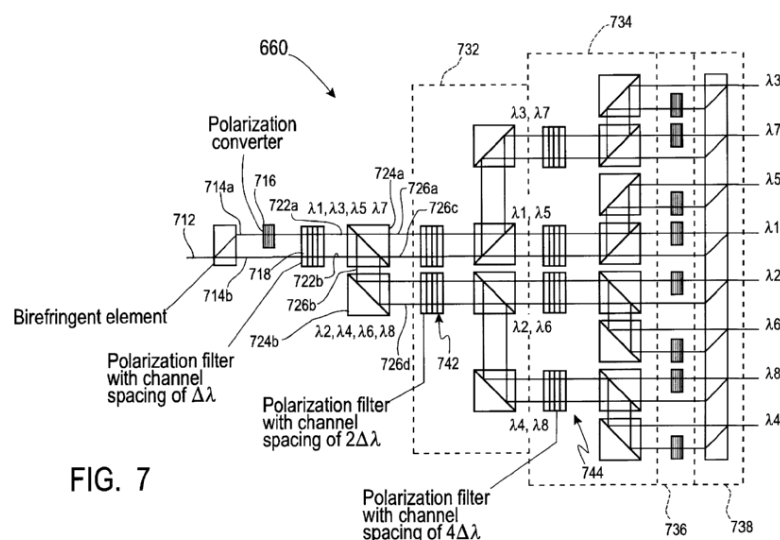

(Source US6208442).

NOTE US6804057 not for [G02B 6/29302](#) as wavelength selection based on etalons not wavelength dependent polarisation effect

[G02B 6/29304](#)

See additional explanation in the special rules section for more details relating to separation between [G02B 6/29305](#) and [G02B 6/29316](#) (concerning diffractive elements attached to optical fibres)

[G02B 6/29305](#)

Free space means not confined, not necessarily that there is no material

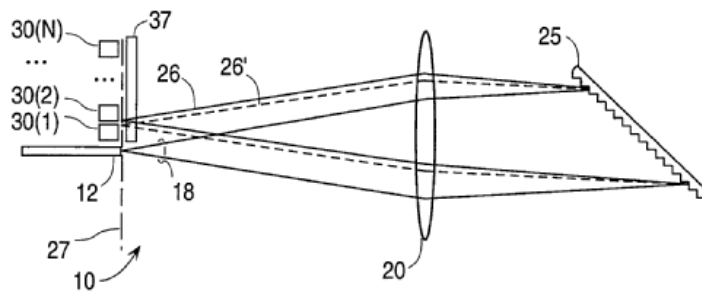


FIG. 1A

Bulk grating 25. (Source WO0137021).

[G02B 6/29307](#)

Illustrative example of the subject matter classified in this group:


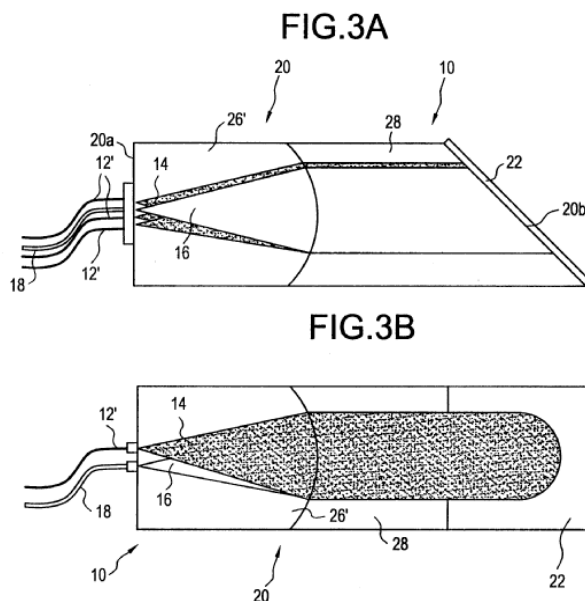


FIG. 3B

Transparent block formed of 26', 28 and 22. (Source WO9931532).

[G02B 6/29308](#)


Illustrative example of the subject matter classified in this group:

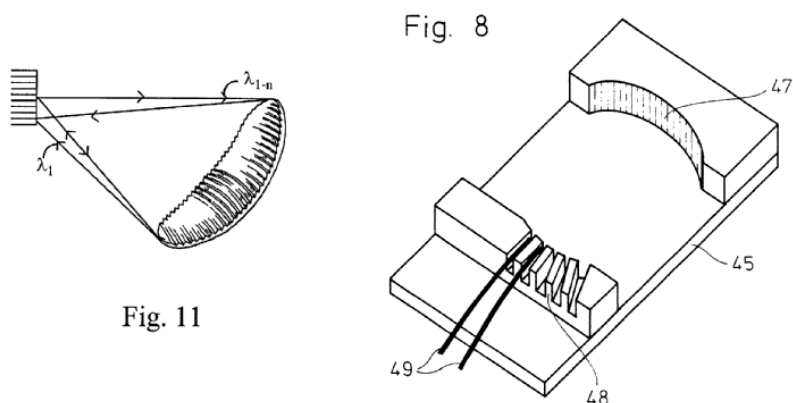

Curved bulk grating 47. (Sources US2002181856 for fig. 11, US4784935 for fig.8).

[G02B 6/2931](#)


Illustrative example of the subject matter classified in this group:

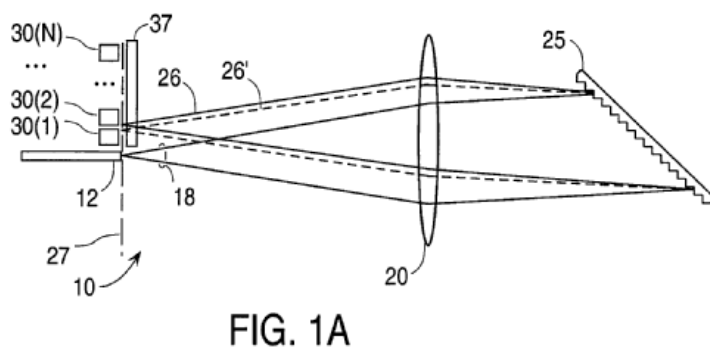

(Source WO0137021).

[G02B 6/29311](#)

Illustrative example of the subject matter classified in this group:

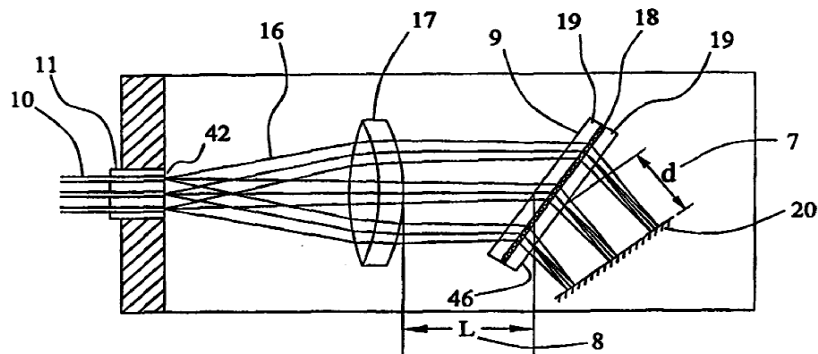


Transmissive grating 9. (Source WO0029888).

[G02B 6/29313](#)

Illustrative example of the subject matter classified in this group:

Fig. 8.

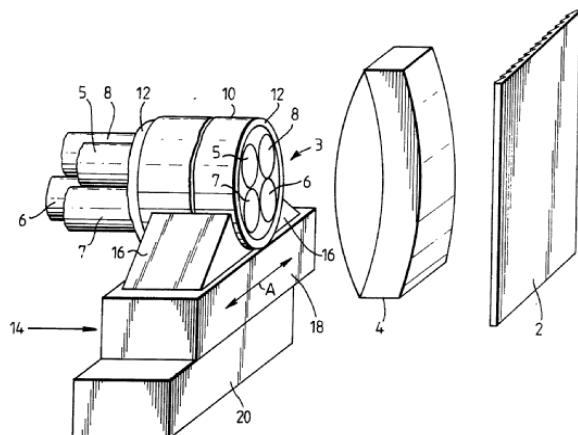

Adjustable support 14 for positioning optical fibres 5 to 8. (Source US5305402).

[G02B 6/29314](#)

Illustrative example of the subject matter classified in this group:

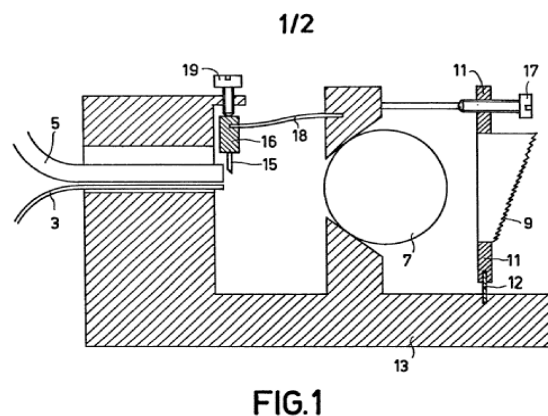


FIG.1


Screw 17 for moving grating 9. (Source US4763969).

[G02B 6/29316](#)

includes gratings in contact with the light guide causing diffraction in the light guide, e.g. in contact with the side of a polished fibre (i.e. no free space, no intermediate element other than coupling medium, closely linked to diffractive elements integrated in the light guide) i.e. beam interacting with the diffractive element confined in at least one dimension transverse to propagation. EP1574883 fig. 1 has collimator between fibre and diffractive film thus is not for group [G02B 6/29317](#) (Indexing Code [G02B 6/29317](#) is appropriate). US4148556 fig. 3 is for group [G02B 6/29322](#) as grating is butt coupled.

[G02B 6/29317](#)


Illustrative example of the subject matter classified in this group:



Optical fibre 71 with grating 72. (Source US6334014).

[G02B 6/29319](#)


Illustrative example of the subject matter classified in this group:

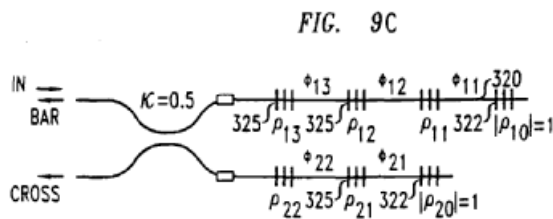

Cascade of optical fibre gratings 325. (Source EP1024378).

[G02B 6/2932](#)

Illustrative example of the subject matter classified in this group:

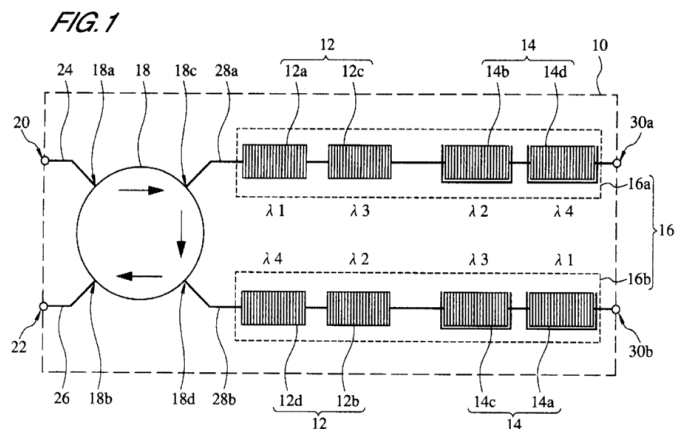

Directional router 18 (circulator) and optical fibre grating cascade 12, 14. (Source EP857988).

[G02B 6/29322](#)

Illustrative example of the subject matter classified in this group:


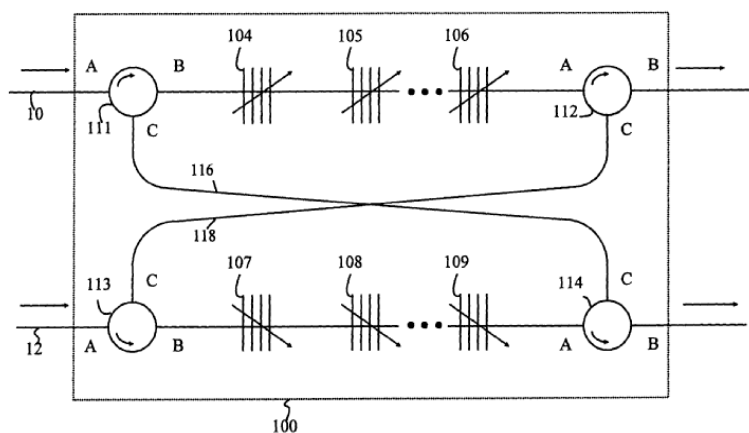


FIGURE 4

Tunable optical fibre gratings 104 to 109. (Source EP95385).

FIG. 3A

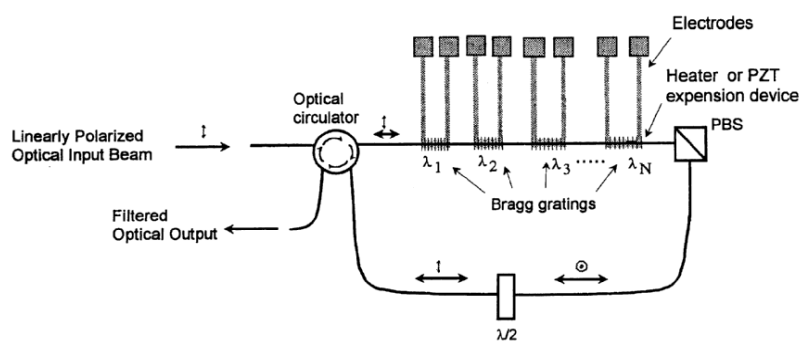

Tunable Bragg gratings (indicated by electrodes). (Source US6097861).

[G02B 6/29323](#)

Illustrative example of the subject matter classified in this group:


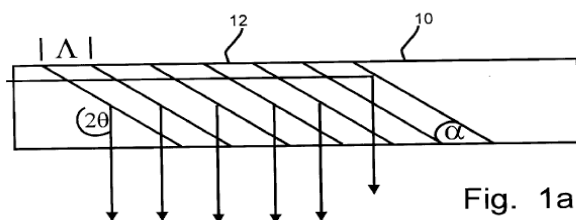


Fig. 1a

Light coupled via grating 12 through bottom (lateral) surface of light guide 10. (Source US6016375).

[G02B 6/29325](#)


Illustrative example of the subject matter classified in this group:

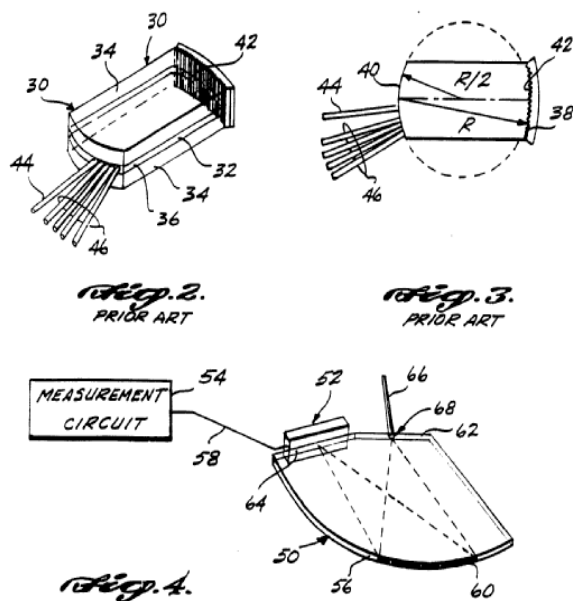

Slab light guide 50. (Source WO9211517).

[G02B 6/29326](#)


Illustrative example of the subject matter classified in this group:

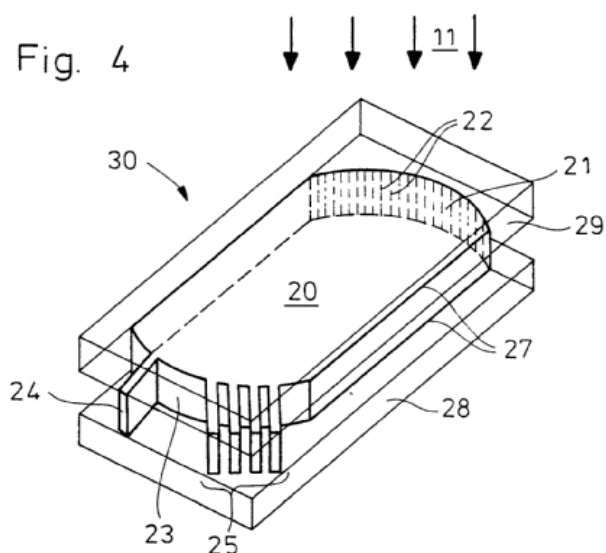

Curved grating 22 on plate light guide 20. (Source US4784935).

[G02B 6/29332](#)


Illustrative example of the subject matter classified in this group:

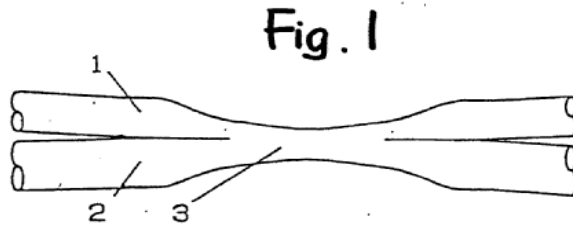

Evanescent coupling in tapered portion 3. (Source EP416537).

[G02B 6/29334](#)

Illustrative example of the subject matter classified in this group:

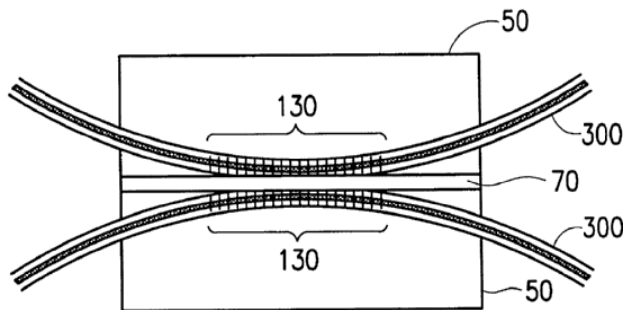

Grating 130 in evanescent coupling region. (Source US20020028040).


[G02B 6/29335](#)

Emphasis is on evanescent coupling from a waveguide mode to a resonant mode of a closed loop resonator but see US4720160 fig. 1 where loop resonators are not used. NB in a Sagnac, light only circulates once before interfering thus [G02B 6/29347](#)

NOTE: see additional explanation in the special rules section below for more details relating to separation between [G02B 6/29335](#) and [G02B 6/29356](#) or [G02B 6/29358](#) (evanescent and non-evanescent coupling of resonators)

[G02B 6/29337](#)


Illustrative example of the subject matter classified in this group:

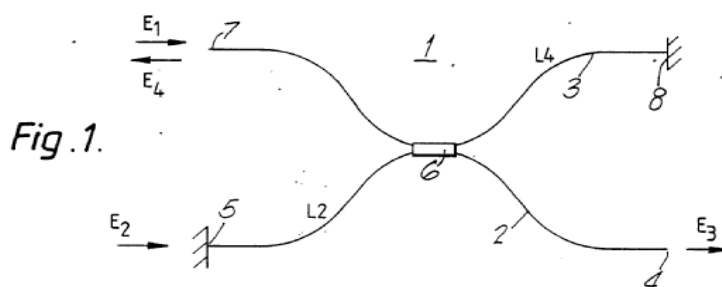

Linear resonator between 5 and 8 coupled via evanescent coupling at region 6. (Source US4859017).

[G02B 6/29338](#)


Illustrative example of the subject matter classified in this group:

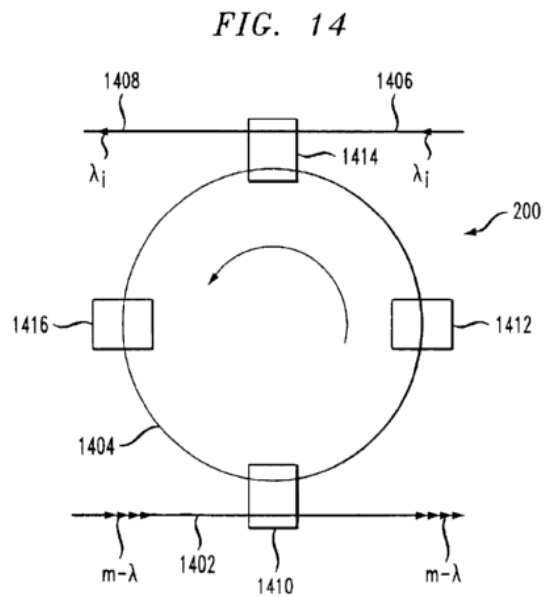

Ring resonator 1404. (Source US6718086).

[G02B 6/2934](#)


Illustrative example of the subject matter classified in this group:

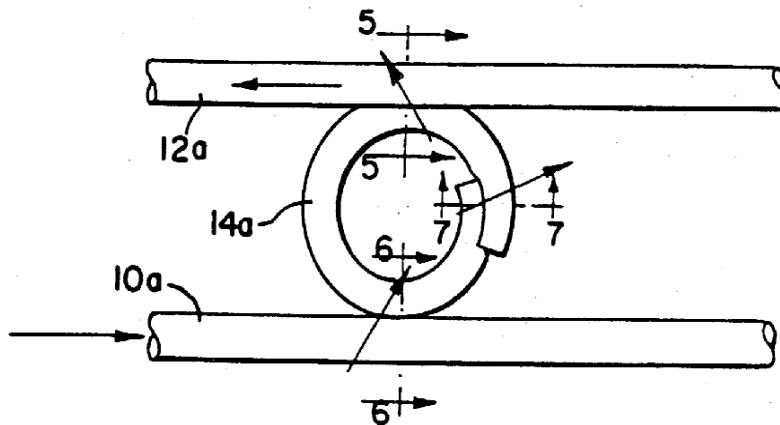


Evanescent coupling to a loop cavity 14a. (Source US4720160).

[G02B 6/29341](#)

Whispering gallery mode (WGM) resonance corresponds to light that is trapped in circular orbits just within the surface of the structure. The modes are most strongly coupled along the equatorial plane and they can be thought to propagate along a zig-zag paths around the sphere.

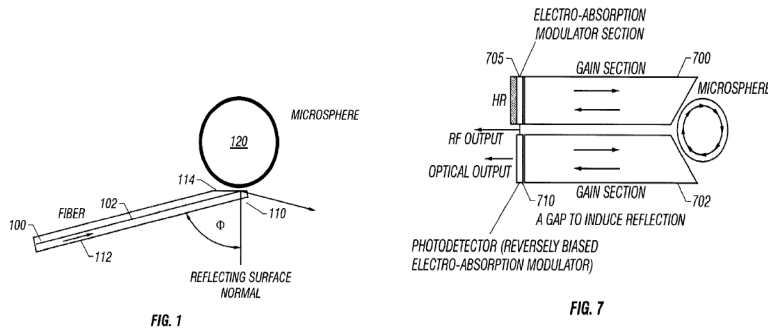


Microsphere 120 supports WGM resonance. (Source US6389197).



(Source US2005128566).


G02B 6/29343

Illustrative example of the subject matter classified in this group:

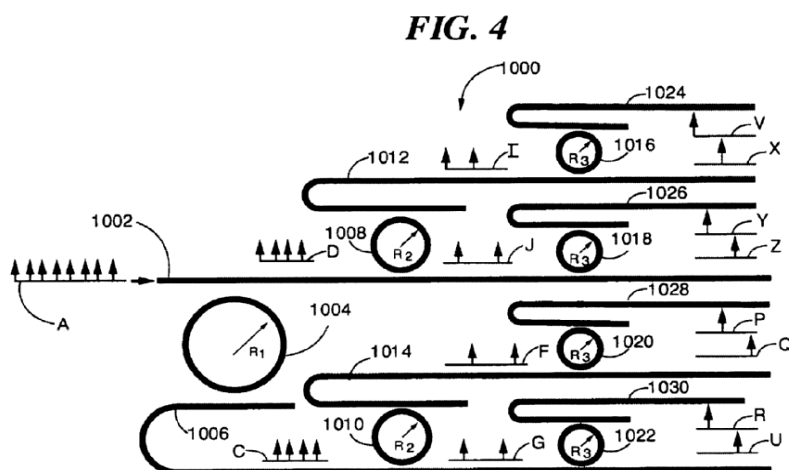

Cascade of loop resonators 1004, 1008, 1016, 1018, 1020, 1022. (Source US6643421).


[G02B 6/29344](#)

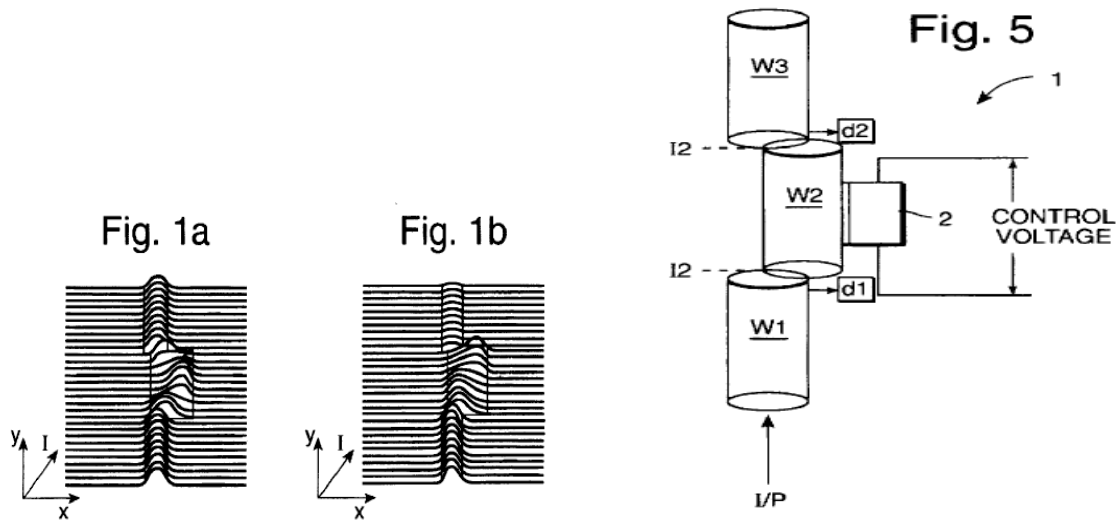

At wavelength L_1 shown in FIG. 1a, the dual-mode section W2 is n beatlengths long and the filter (fig. 5) passes radiation. At wavelength L_2 shown in FIG. 1b, the dual-mode W2 section is $n-1/2$ beatlengths long and so radiation is not coupled from the dual-mode filter to the output single-mode filter (W3). (Source US5796891).

[G02B 6/29347](#)

Emphasis is on interference between split beams at least one of which travels a loop delay distance

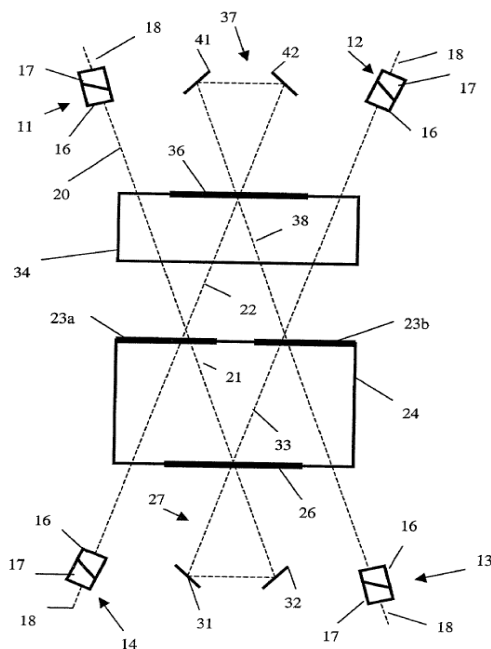

Loops 27 and 37 apply two different delays to beams along optical paths, so that the beams are interfered to form respective output beams corresponding to odd and even communication channels. (Source US2003234935).

[G02B 6/29349](#)

Illustrative example of the subject matter classified in this group:

US6252716

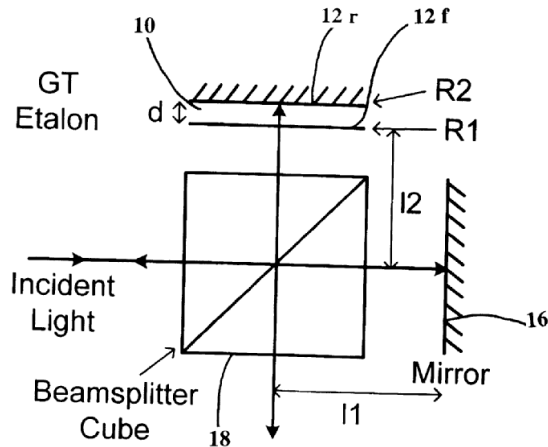


Fig. 1

(Source US6252716).

G02B 6/2935

Illustrative example of the subject matter classified in this group:


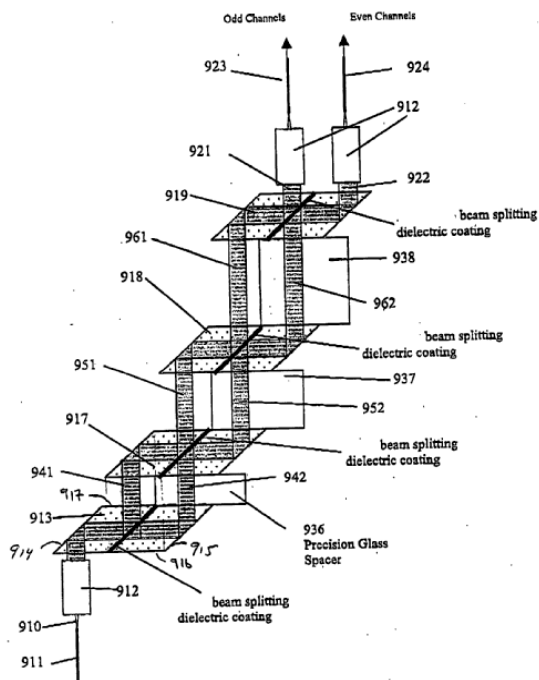


Fig. 9

(Source EP1293814).

G02B 6/29353

Illustrative example of the subject matter classified in this group:

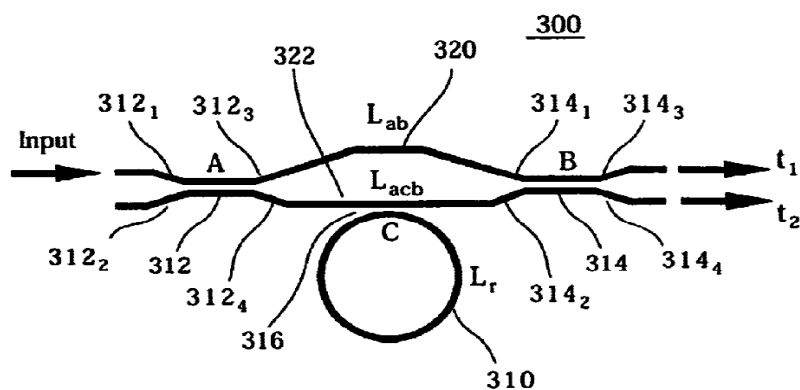

Ring resonator 310 coupled to arm 322 of Mach-Zehnder Interferometer. (Source US6834141).

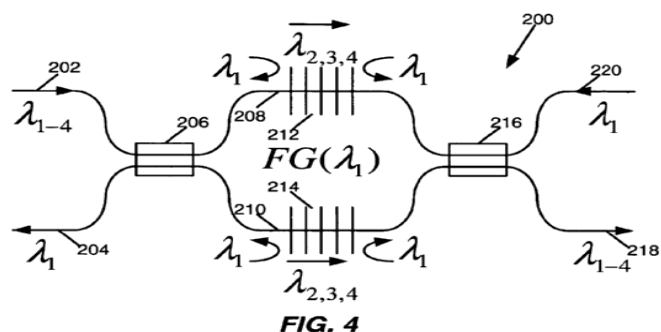



FIG. 4

Gratings 212 & 214 in arms 208 & 201 of Mach-Zehnder Interferometer. (Source US2006002653).

[G02B 6/29355](#)

Illustrative example of the subject matter classified in this group:


Fig. 1

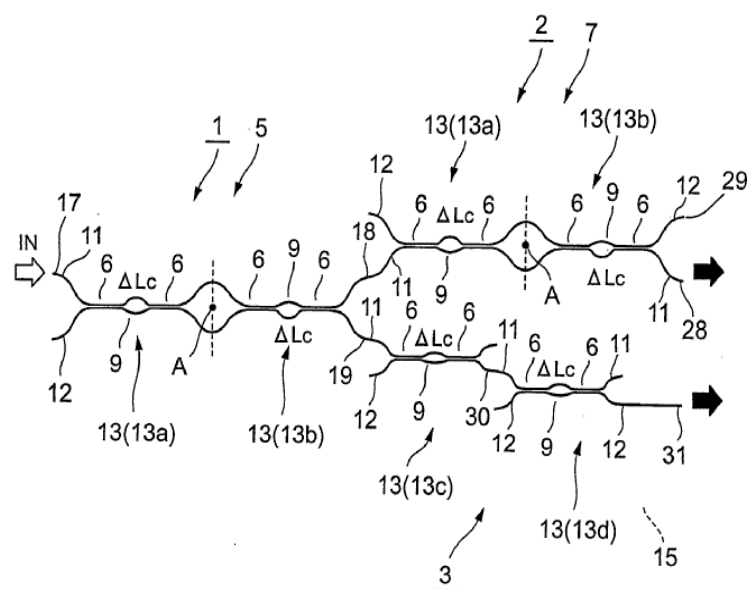

Cascade of Mach-Zehnder Interferometers 13a-13d. (Source WO2005071453).


[G02B 6/29356](#)

Illustrative example of the subject matter classified in this group:

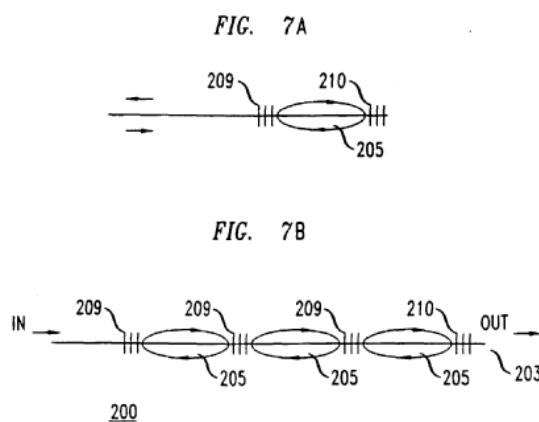

End coupling into cavities formed by reflective gratings 209, 210. (Source EP1024378).

NOTE: see additional explanation in the special rules section for more details relating to separation between [G02B 6/29335](#) and [G02B 6/29356](#) or [G02B 6/29358](#) (evanescent and non-evanescent coupling of resonators)

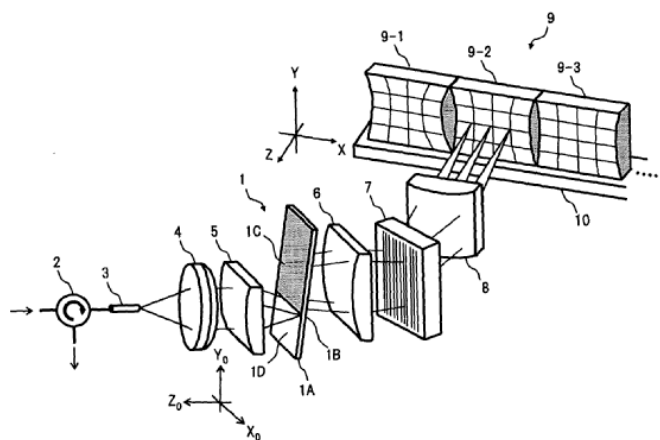[G02B 6/29358](#)


Interferometer 1. (Source EP1703307).

NOTE: see additional explanation in the special rules section for more details relating to separation between [G02B 6/29335](#) and [G02B 6/29356](#) or [G02B 6/29358](#) (evanescent and non-evanescent coupling of resonators)

[G02B 6/29359](#)

Cavity outside light guide, does not include intermediate elements between fibre end face and filter.

FIG.3




Cavity 26 between mirrors 30 & 32 on ends of light guides 38 & 40. (Source US5202939).

[G02B 6/29362](#)


Illustrative example of the subject matter classified in this group:

FIG.1

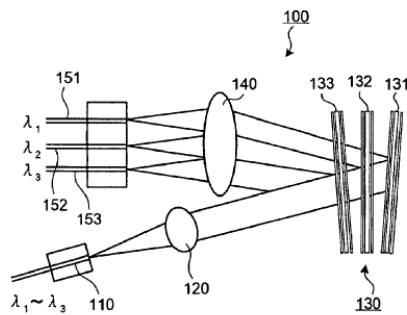

Cascade of filters 131, 132, 133. (Source US2008112668).

[1828]

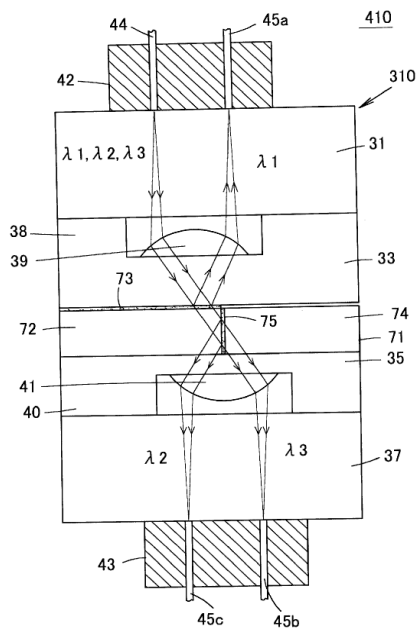

Cascade of filters 73 & 75. (Source WO2006080249).

[G02B 6/29364](#)

Illustrative example of the subject matter classified in this group:

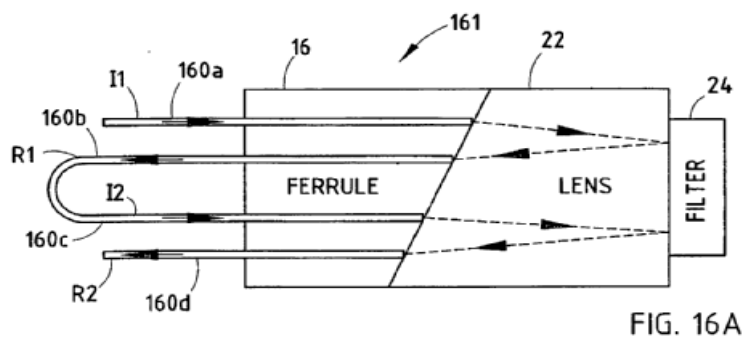



FIG. 16A

Cascade of filtering operations on single filter 24 by light guide 12. (Source WO03021319).

[G02B 6/29365](#)

Illustrative example of the subject matter classified in this group:

FIG. 2

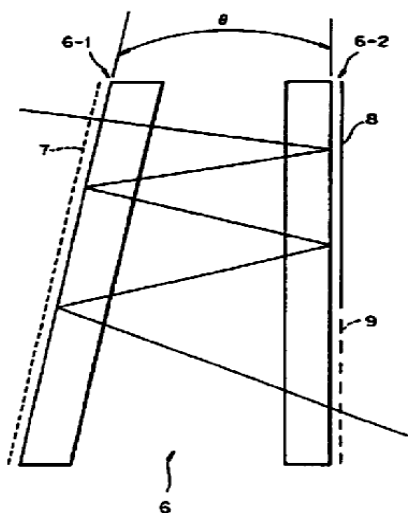


Zigzag path between filter film 7 and reflector film 8. (Source GB2304204).

[G02B 6/29367](#)

Illustrative example of the subject matter classified in this group:


[图30]

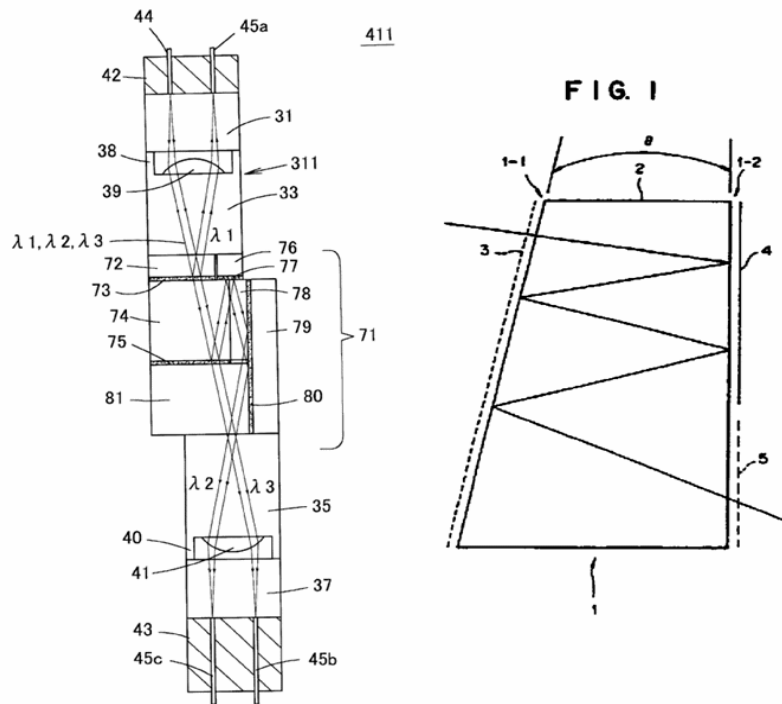

Zigzag path in solid block formed of components 74,78,81 and single solid block 2 (Sources WO2006080249 for fig. 30, GB2304204 for fig. 1).

[G02B 6/29368](#)


No coupling optics (such as a lens) between fibre and filter




(Source Yokosuka et al. Proc. 40th Electronic components and technology conference, May 20-23, 1990, p. 865, XP144764).

[G02B 6/2937](#)

Illustrative example of the subject matter classified in this group:

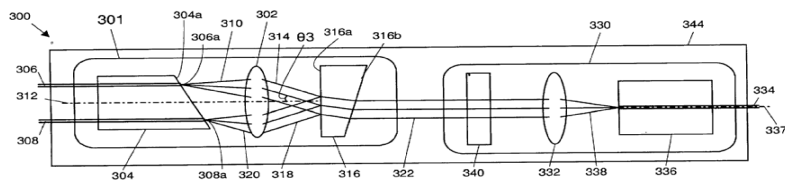


(Source US2004042719)

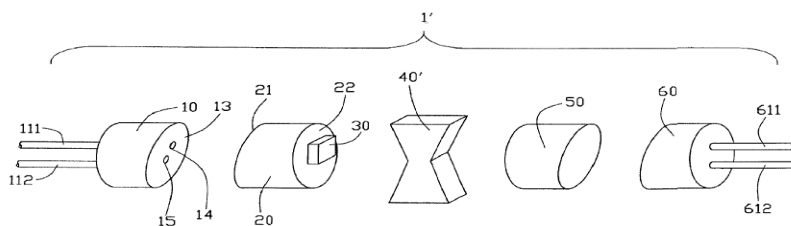

(Source US2003025967)

[G02B 6/29373](#)


Illustrative example of the subject matter classified in this group:

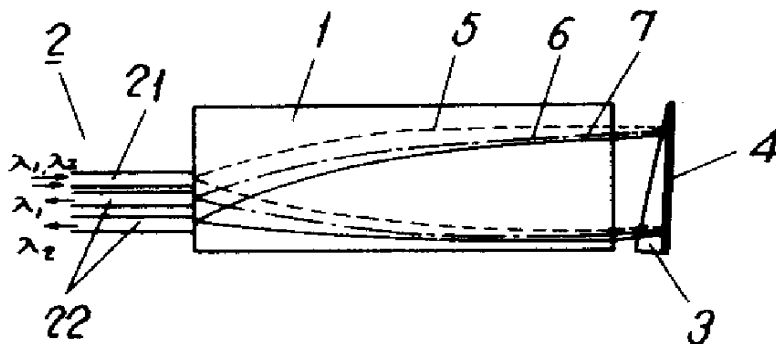

Dispersive prism 3. (Source JP55057804).

[G02B 6/29376](#)


Illustrative example of the subject matter classified in this group:

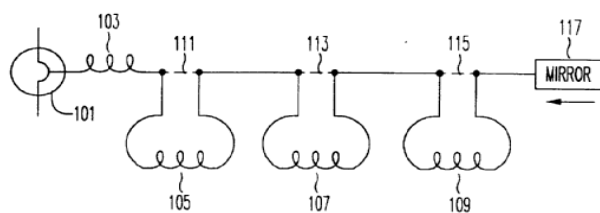FIG. 5

Light guides 103, 105, 107 and 109 with different dispersion. (Source EP0684709).

[G02B 6/2938](#)


Illustrative example of the subject matter classified in this group:

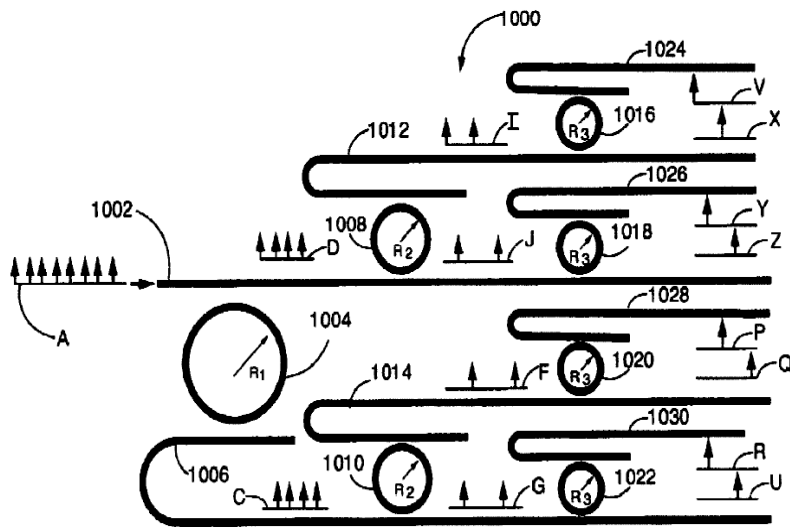

Input signal A demultiplexed into different wavelength signals. (Source US6643421).

G02B 6/29383


Illustrative example of the subject matter classified in this group:

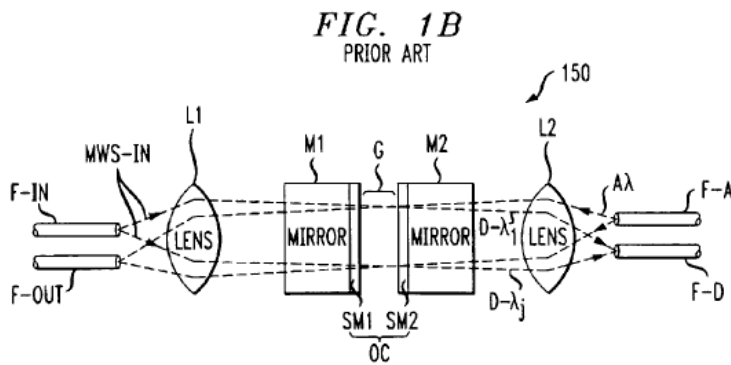

Signal added at F-A and dropped at F-D. (Source US6718086).

G02B 6/29386

Illustrative example of the subject matter classified in this group:

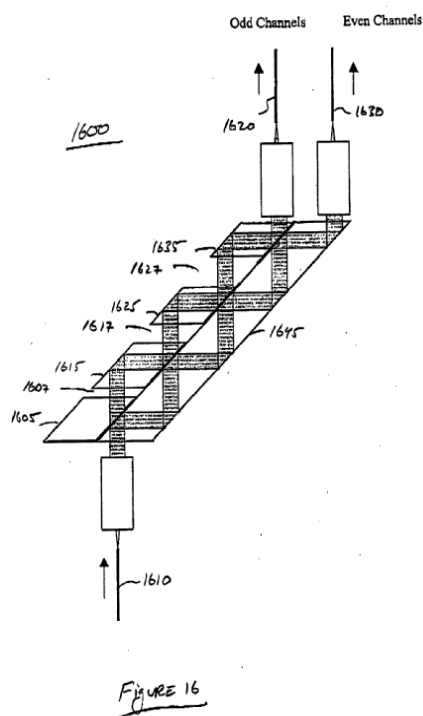

Input signal 1610 de-interleaved into odd and even channels 1620, 1630. (Source EP1293814).

References

Limiting references

This place does not cover:

Coupling of light within planar waveguide substrates of the integrated circuit kind	G02B 6/12
Coupling light guides with optoelectronic elements	G02B 6/42

Informative references

Attention is drawn to the following places, which may be of interest for search:

Mechanical coupling means	G02B 6/36
Scanning using movable fibres	G02B 26/103
Systems for wavelength dispersion compensation	H04B 10/2513
Systems for polarisation mode dispersion compensation	H04B 10/2569
Systems for wavelength division multiplexing	H04J 14/02
Optical switching systems	H04Q 11/0001

Special rules of classification

[G02B 6/287](#) is not used for classification. [G02B 6/255](#), [G02B 6/2835](#), [G02B 6/2856](#) and [G02B 6/29331](#) are used instead.

The following arrangement is observed in relation to optical fibre couplers:

Optical fibre couplers of the NxN type (e.g. 2x2)	G02B 6/2821
Optical fibre couplers of the 1xN type formed by thermal treatment	G02B 6/2856

Prisms or gratings coupled to light guides for purposes other than wavelength selection are classified in [G02B 6/34](#).

Systems for wavelength division multiplexing based on optical fibres are classified in [H04J 14/02](#). Reference is made to the section "Relationship between large subject-matter areas" under [G02B 6/00](#).

Planar waveguides

Couplings between separate planar waveguide substrates, e.g. using intermediate bulk optics, are classified in [G02B 6/26](#). Planar waveguide couplings are also classified in [G02B 6/30](#)-[G02B 6/305](#), [G02B 6/34](#), [G02B 6/3596](#), [G02B 6/42](#) and [G02B 6/43](#).

[G02B 6/262](#)-[G02B 6/29398](#), [G02B 6/32](#)-[G02B 6/327](#) are restricted to light guides of the optical fibre type.

The coupling of light within planar waveguide substrates is classified in [G02B 6/12](#) and subgroups. For example optical fibre couplers are classified in [G02B 6/2804](#) whereas planar waveguide couplers are classified in [G02B 6/125](#). The one exception is [G02B 6/3596](#).

In [G02B 6/35](#) and subgroups a single subgroup is assigned (the most relevant) with further aspects classified in the Indexing Code.

Indexing Codes

No groups correspond to Indexing Codes [G02B 2006/2839](#) and [G02B 2006/2865](#).


Separation between [G02B 6/29305](#) and [G02B 6/29316](#)

[G02B 6/29305](#) is for bulk diffraction elements (gratings) with free space between the light guide and grating. This means that before interacting with the grating the light beams are not guided in the light guide for a certain distance (or vice-versa).

[G02B 6/29316](#) is for light guides comprising the grating. This means there is no free space between the light guide and the grating and the light beams are guided in the light guide onto the grating (or vice-versa).


Examples.

[G02B 6/29311](#)

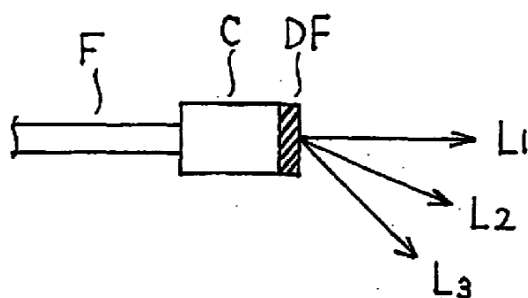

Diffraction film DF is on a collimator C. (Source EP1574883).

G02B 6/29322

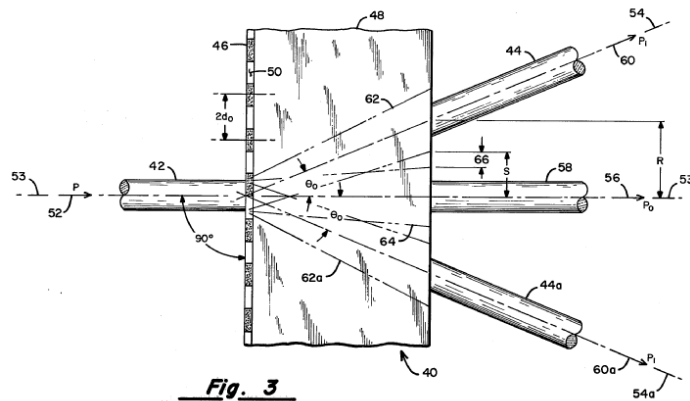

Butt coupled grating 50, no free space to light guide 42. (Source US4148556).

G02B 6/29317

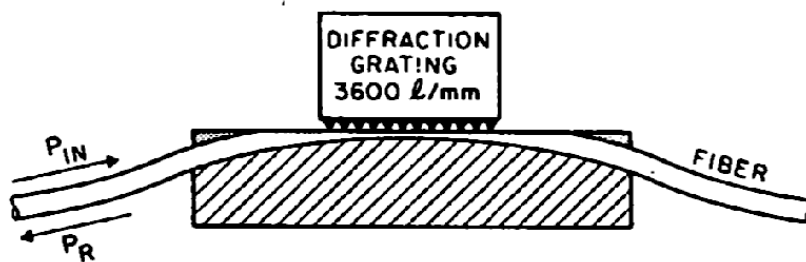


Fig. 1. Cross section schematically showing metallic grating in contact with polished fiber.

No free space between grating and fiber. (Source Sorin et al. in Journal of Lightwave Technology, Vol. LT-3, Oct 1985, p. 1041, XP1652325).


Separation between [G02B 6/29346](#) and [G02B 6/29335](#)

Parallel plate resonators can be in either [G02B 6/29358](#) or [G02B 6/29335](#) - the correct group depends on how the resonator is coupled to the light guide.

Where light is coupled into the resonator from the light guide by evanescence [G02B 6/29335](#) is appropriate (i.e. the evanescent field of the light guided in the light guide overlaps with the resonant mode of the resonator). This is usually the case with lateral coupling, but not always.


Examples

US20070104421 in [G02B 6/29358](#)

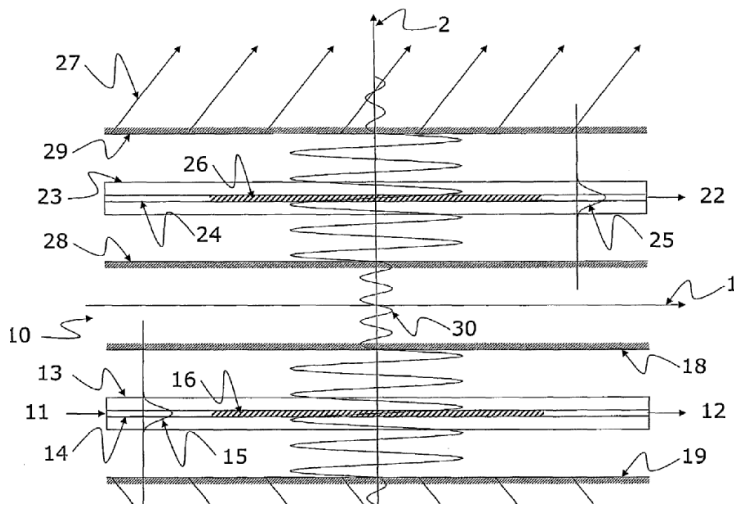

Parallel plate resonators formed by resonator members 18, 19, 28 and 29 external to light guides 13, 23 and light coupled between resonators and light guides by deflector means 16 and 26. (Source US20070104421).

[G02B 6/29337](#)

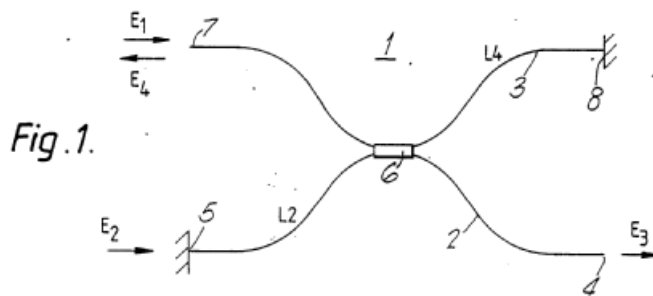

Linear resonator between 5 and 8 coupled via evanescent coupling at region 6. (Source US4859017).

Devices of the type shown in fig. 1-3 below with evanescent coupling to a linear cavity between mirrors 24 & 26 are classified in [G02B 6/29337](#), of the type shown in fig. 4 below with evanescent coupling to a loop cavity 14a are classified in [G02B 6/2934](#)




FIG. 1




FIG. 2





FIG. 3

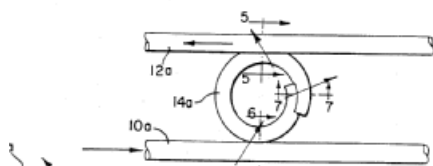

(Source US4720160).

Devices of the type shown in fig. 6B with evanescent coupling to a cascade of loop resonators 180 are classified in [G02B 6/29343](#). Devices of the type shown in fig. 7A & 9C below with end coupling into cavities formed by reflective gratings (i.e. without evanescent coupling into a resonator cavity) are classified in [G02B 6/29356](#).

FIG. 6B




FIG. 7A





FIG. 9C



(Source EP1024378).

G02B 6/36

Mechanical coupling means ({[G02B 6/06](#), [G02B 6/30](#), [G02B 6/35](#), [G02B 6/38](#)}, [G02B 6/255](#), [G02B 6/42](#) take precedence)

Definition statement


This place covers:

The mechanical coupling of optical fibres, e.g. mechanical means for holding optical fibres on a substrate, and mechanical means such as connectors for the interconnection of optical fibres.

Further details of subgroups

[G02B 6/3608](#)


Illustrative example of the subject matter classified in this group:

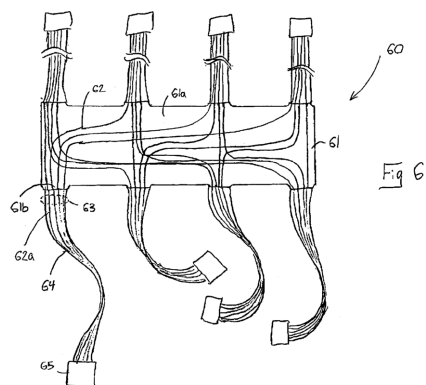

(Source US2003/0179980).

[G02B 6/3612](#)


Illustrative example of the subject matter classified in this group:

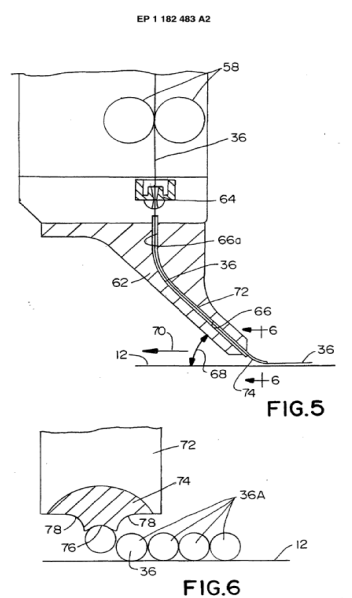

(Source EP 1 182 483).

[G02B 6/3616](#)

Illustrative example of the subject matter classified in this group:

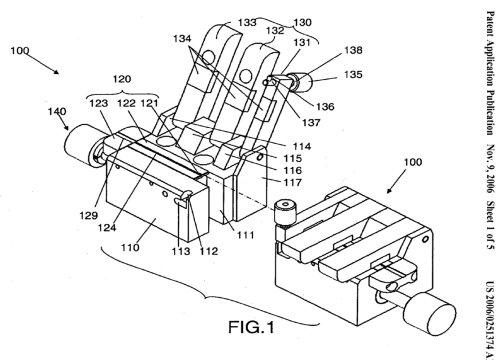


Patent Application Publication No. 9,2006 Sheet 1 of 5
US 2006/025174 A1

(Source US2006/0251374).

[G02B 6/3624](#)


Illustrative example of the subject matter classified in this group:

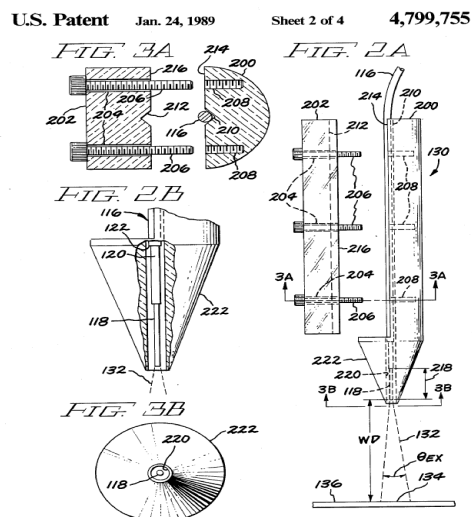

(Source US 4,799,755).

[G02B 6/3628](#)

Illustrative example of the subject matter classified in this group:

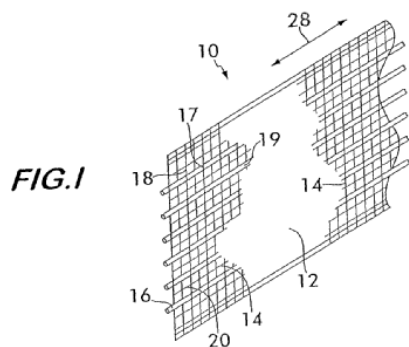


Optical fibre (16). (Source WO03/021312).

[G02B 6/364](#)

Illustrative example of the subject matter classified in this group:

FIG. 2

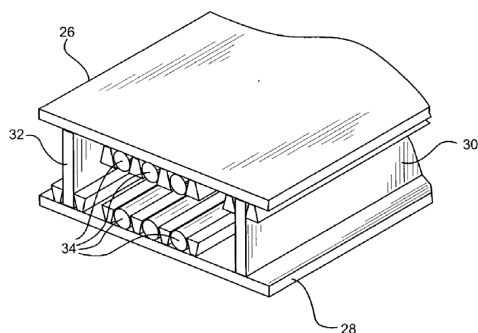

(Source US 2004/0086255).


[G02B 6/3652](#)

Illustrative example of the subject matter classified in this group:

Patent Application Publication Mar. 4, 2004

US 2004/0042756 A1


FIG. 1

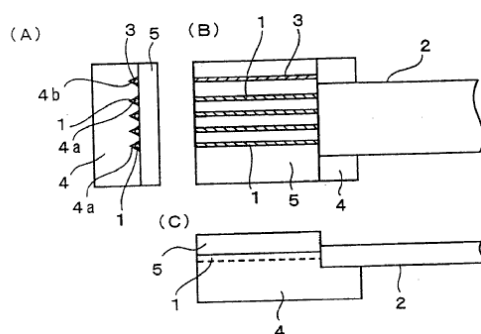

(Source US2001/0042756).

[G02B 6/3656](#)


Illustrative example of the subject matter classified in this group:

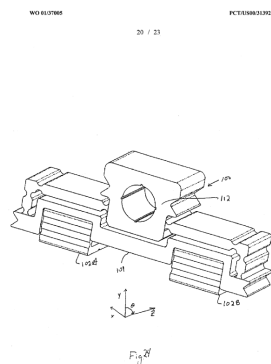

(Source WO01/37005).

G02B 6/366


Illustrative example of the subject matter classified in this group:

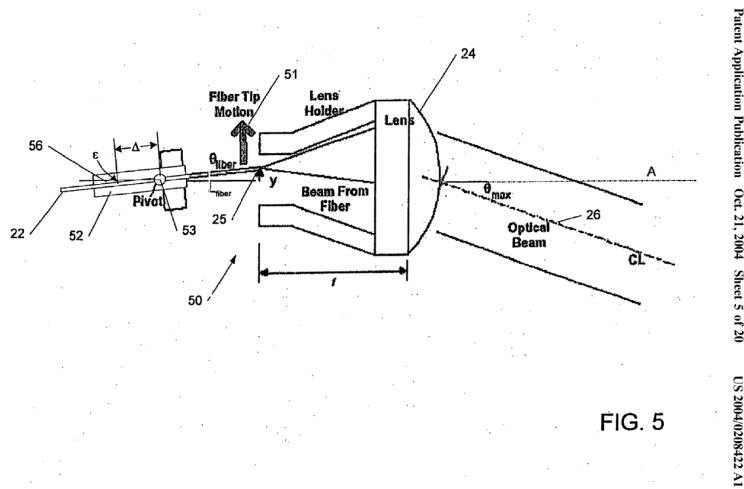

(Source US2004/0208422).

G02B 6/3668


Illustrative example of the subject matter classified in this group:

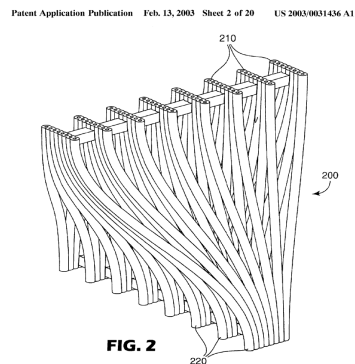

(Source US2003/0031436). (also classified in [G02B 6/3676](#)).

G02B 6/3672


Illustrative example of the subject matter classified in this group:

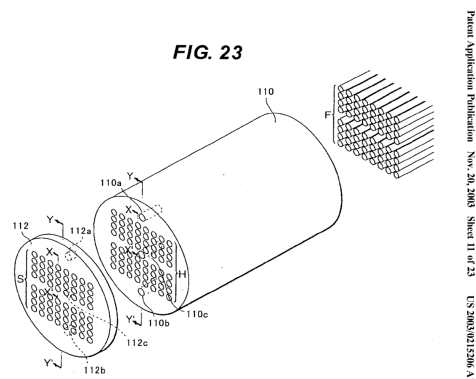

(Source US2003/0215206).

[G02B 6/3676](#)

Illustrative example of the subject matter classified in this group:

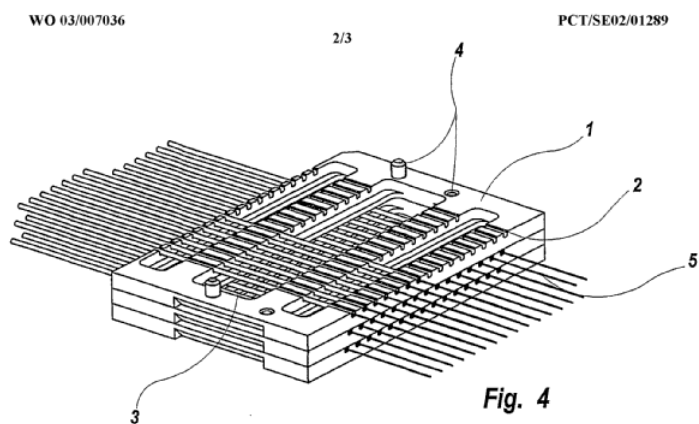


(Source WO03/007036).

[G02B 6/368](#)

Illustrative example of the subject matter classified in this group:

FIG. 1A

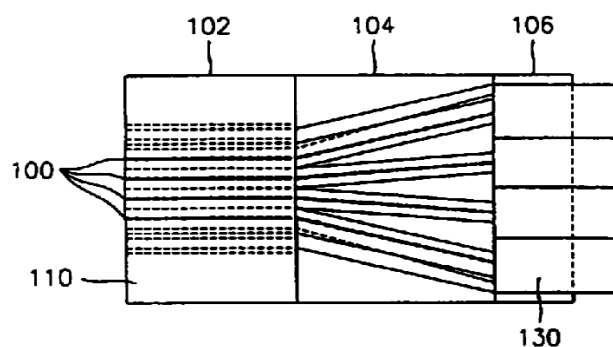

(Source GB2331161).

References

Limiting references

This place does not cover:

Light guides formed by bundle of fibres, the relative position of the fibres being the same at both ends, e.g. for transporting images	G02B 6/06
Splicing of light guides by fusion or bonding	G02B 6/255
Optical coupling means for use between fibre and thin-film device	G02B 6/30
Optical coupling means having switching means	G02B 6/35
Optical coupling means having fibre to fibre mating means	G02B 6/38
Coupling light guides with optoelectronic elements	G02B 6/42

Informative references

Attention is drawn to the following places, which may be of interest for search:

Cleaning of optical fibres and connectors	B08B 1/00
---	---------------------------

Special rules of classification

The mechanical coupling between optical fibres or of optical fibres with opto-electronic elements is classified in the appropriate groups of [G02B 6/38](#) - [G02B 6/3897](#) and [G02B 6/42](#)-[G02B 6/43](#) and additionally in Indexing Codes [G02B 6/3608](#)-[G02B 6/3696](#), especially when the latter are more detailed. Light guides coupled together as a splice by mechanical holding means, i.e. mechanical splices, are classified in [G02B 6/3801](#).

The mechanical coupling of optical fibre cables and the storage of optical fibres is classified in [G02B 6/4401](#) and subgroups.

In [G02B 6/3608](#)-[G02B 6/3696](#) as far as possible only one subgroup is assigned with further aspects classified in Indexing Codes [G02B 6/3608](#)-[G02B 6/3696](#).

A demountable optical fibre connector is often classified in several of the [G02B 6/3807](#) - [G02B 6/3897](#) subgroups and/or Indexing Codes [G02B 6/3807](#)-[G02B 6/3897](#) to reflect the various aspects of the connector. This is especially important to allow retrieval of mechanical configurations which are not easily searchable using words.

Optical fibre connector accessories and tools, e.g. for assembling, insertion or extraction of connectors not provided for elsewhere are classified in [G02B 6/3807](#). The testing of optical fibre connectors is classified in [G01M 11/00](#) and subgroups. Devices for cleaning optical fibre connectors are classified in [G02B 6/3807](#) and circulated to [B08B 1/00](#).

[G02B 6/40](#)-[G02B 6/403](#) relate to optical fibre bundles in the sense of [G02B 6/04](#).

Planar Waveguides

The mechanical coupling of planar waveguides is classified in the appropriate one of [G02B 6/12](#)-[G02B 6/12033](#), [G02B 6/30](#)-[G02B 6/305](#), [G02B 6/42](#) and [G02B 6/43](#).

G02B 6/3801

{Permanent connections, i.e. wherein fibres are kept aligned by mechanical means (splices by bonding [G02B 6/255](#); fusion splices [G02B 6/2551](#))}

References

Limiting references

This place does not cover:

Splices by bonding optical fibres together	G02B 6/255
Fusion splices	G02B 6/2551

G02B 6/3809


{without a ferrule embedding the fibre end, i.e. with bare fibre end}

Definition statement

This place covers:

Demountable optical fibre connectors presenting a protruding free optical fibre end

Illustrative example of subject matter classified in this group:

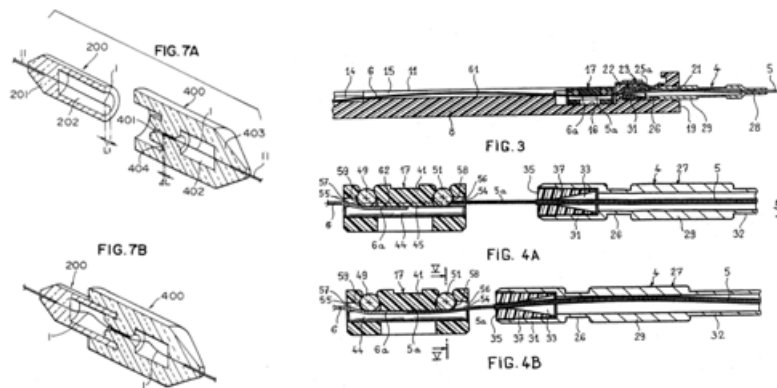

(Sources: US5,694,506, FR2818839)

G02B 6/381


{of the ferrule type, e.g. fibre ends embedded in ferrules, connecting a pair of fibres}

Definition statement

This place covers:

Demountable optical fibre connectors having ferrules.

Illustrative example of subject-matter classified in this group:

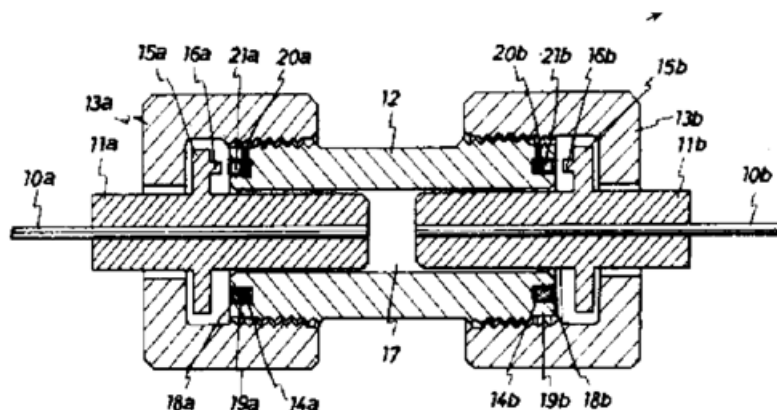

Ferrules 11a, 11b. (Source: JPS5674211)

G02B 6/3833**{Details of mounting fibres in ferrules; Assembly methods; Manufacture}****Definition statement***This place covers:*

Details of the ferrule, mounting of prepared optical fibre in the ferrule.

G02B 6/3869**{Mounting ferrules to connector body, i.e. plugs}****Definition statement***This place covers:*

Mounting of the assembled fibre and ferrule into the connector body and details of the connector body.

G02B 6/42**Coupling light guides with opto-electronic elements****References****Limiting references***This place does not cover:*

Semiconductor devices sensitive to light per se	H01L 31/00
Semiconductor devices for light emission per se	H01L 33/00

Informative references*Attention is drawn to the following places, which may be of interest for search:*

Beam shaping of a semiconductor light source	G02B 27/0916
Beam shaping using a light guide	G02B 27/0994
High frequency adaptations of semiconductor devices	H01L 23/66
Semiconductor light sources with optical field shaping elements	H01L 33/58
Electrical conduction aspects of semiconductor light sources	H01L 33/62
Arrangements for extracting light from an organic light source	H01L 51/5262
Optical interconnects	H04B 10/801
Printed circuit boards	H05K 1/18
Cooling, ventilating or heating electrical apparatus	H05K 7/20

Special rules of classification

Optical coupling aspects of light guides for illumination are classified in [G02B 6/0001](#) - [G02B 6/0096](#).
 The coupling of non coherent light, including lamps, into optical fibres for purposes other than illumination is classified in [G02B 6/4298](#).

Electric, thermal and mechanical aspects of packages not covered by [G02B 6/4202](#) - [G02B 6/4298](#) are classified in [G02B 6/4201](#). [G02B 6/4201](#) - [G02B 6/4215](#) also include documents where the light guide is implicit.

The coupling of light guides with opto-electronic elements using a wavelength selective or polarisation selective and adjusting optical element are classified in [G02B 6/4215](#) or [G02B 6/4246](#) and the relevant [G02B 6/27](#) - [G02B 6/2793](#) and/or [G02B 6/293](#) - [G02B 6/29398](#), since the latter are more detailed.

Mechanical coupling aspects of optical fibre arrangements classified in [G02B 6/42](#) - [G02B 6/43](#) are additionally classified in [G02B 6/36](#) - [G02B 6/3696](#) especially when the latter are more detailed.

Connector aspects of disconnectable light guide arrangements classified in [G02B 6/4292](#) are also classified in [G02B 6/3807](#) - [G02B 6/3897](#) and/or [G02B 6/3807](#) - [G02B 6/3897](#).

Planar Waveguides

Planar waveguides coupled with optoelectronic elements are classified in [G02B 6/42](#) with [G02B 6/4201](#) - [G02B 6/4296](#) assigned for the details (e.g. [G02B 6/42](#) and [G02B 6/4214](#)), however monolithic configurations, i.e. where the planar waveguide and optoelectronic element are grown on the same substrate are classified in [G02B 6/12004](#).

Indexing Codes

[G02B 6/4292](#) has the additional Indexing Code [G02B 2006/4297](#) for protection means, e.g. using shutters to avoid inadvertent exposure

G02B 6/44

Mechanical structures for providing tensile strength and external protection for fibres, e.g. optical transmission cables (cables incorporating electric conductors and optical fibres {where features relating to the optical fibres are not of interest} [H01B 11/22](#))

References

Informative references

Attention is drawn to the following places, which may be of interest for search:

Cables incorporating electric conductors and optical fibres (where features relating to the optical fibres are not of interest)	H01B 11/22
---	----------------------------

Special rules of classification

[G02B 6/4439](#)-[G02B 6/4478](#) are also used for classifying auxiliary devices with uncabled optical fibres. For example the storage of optical fibres in spools is classified in [G02B 6/4457](#).

Optical cable installations in buildings, for example over multiple floors, are classified in [G02B 6/4466](#).

Indexing Codes

The subgroups [G02B 6/4404](#), [G02B 6/4408](#), [G02B 6/4421](#), [G02B 6/4423](#), [G02B 6/4426](#), [G02B 6/4433](#), [G02B 6/4435](#), [G02B 6/445](#), [G02B 6/4455](#), [G02B 6/4461](#), [G02B 6/4497](#), [G02B 6/4498](#) do not have a corresponding Indexing Code.

G02B 6/46

Processes or apparatus adapted for installing optical fibres or optical cables (installation of cables containing electric conductors and optical fibres [H02G](#))

Special rules of classification

[G02B 6/52](#) is not used, [G02B 6/4464](#) and [G02B 6/50](#)-[G02B 6/508](#) are used instead.

[G02B 6/54](#) is not used, [G02B 6/4465](#) and [G02B 6/50](#) are used instead.

Indexing Codes

No Indexing Codes exist.

G02B 7/00

Mountings, adjusting means, or light-tight connections, for optical elements

Definition statement

This place covers:

Mountings, adjusting means, including means for effecting focusing and zooming, and light-tight connections for optical elements like lenses, prisms or mirrors or the like.

Special rules of classification

The following simplified arrangements are to be observed in relation to mechanical aspects of focusing and zooming ([G02B 7/04](#)):

- Non-zoom systems: Manual focusing: [G02B 7/04](#)
- Non-zoom systems: Automatic (motorized) focusing: [G02B 7/08](#)
- Zoom systems: Manual focusing and zooming: [G02B 7/10](#)
- Zoom systems: Automatic (motorized) focusing and zooming: [G02B 7/102](#)
- [G02B 7/10](#) and [G02B 7/102](#) relate to the mechanical aspects of zoom lenses (e.g. cam arrangements). The optical aspects of the design of zoom lenses are covered by [G02B 15/00](#).

The following IPC subclasses are not used for classification: [G02B 7/185](#) - [G02B 7/198](#) (subject-matter covered by [G02B 7/182](#) and other subgroups of [G02B 7/182](#)).

G02B 9/00

Optical objectives characterised both by the number of the components and their arrangements according to their sign, i.e. + or - ([G02B 15/00](#) takes precedence)

Definition statement

This place covers:

Optical objectives characterised both by the number of the components and their arrangements according to their sign, i.e. + or -. The plus (+) symbol represents a positive lens, and the minus (-) symbol represents a negative lens

References

Limiting references

This place does not cover:

Optical objectives with means for varying the magnification	G02B 15/00
---	----------------------------

G02B 13/00

Optical objectives specially designed for the purposes specified below (with variable magnification {in general} [G02B 15/00](#))

Definition statement

This place covers:

Optical objectives specially designed for specific purposes.

Further details of subgroups

Concerning the subgroup [G02B 13/001](#) (miniaturised objectives for electronic devices, e.g. portable telephones, webcams, PDAs, small digital cameras), symbols from [G02B 13/0015](#) and [G02B 13/0055](#) will usually be assigned. In [G02B 13/002](#), one compound lens counts as one lens. The symbol [G02B 13/006](#) indicates the presence of a compound element. The following figures illustrate typical examples of the subject-matter found in the indicated subdivisions:

References

Informative references

Attention is drawn to the following places, which may be of interest for search:

With variable magnification in general	G02B 15/00
--	----------------------------

Special rules of classification

With the exception of [G02B 13/06](#), optical objectives having reflecting surfaces are not classified under [G02B 13/00](#), but under [G02B 17/00](#).

Unless specified in the title of the subgroups, this group and its subgroups do not cover objectives comprising reflecting surfaces, which are covered by [G02B 17/06](#), [G02B 17/08](#) and their subgroups

G02B 13/0015

{characterised by the lens design}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

Patent Application Publication Jan. 31, 2008 Sheet 1 of 4 US 2008/0023545 A1

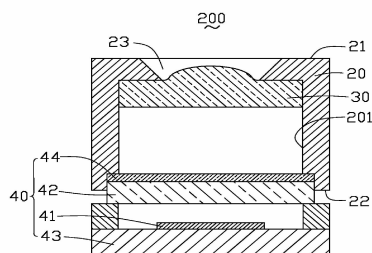


FIG. 1


G02B 13/002

{having at least one aspherical surface (aspherical lenses per se [G02B 3/02](#))}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

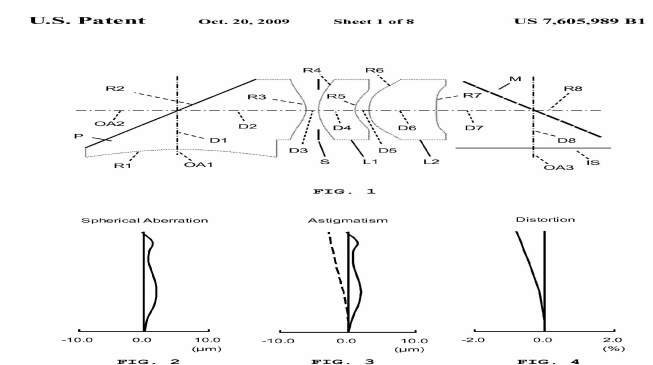

(note: second group [G02B 13/007](#))


References**Informative references**

Attention is drawn to the following places, which may be of interest for search:


Aspherical lenses per se	G02B 3/02
--------------------------	---------------------------

G02B 13/0025**{having one lens only}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

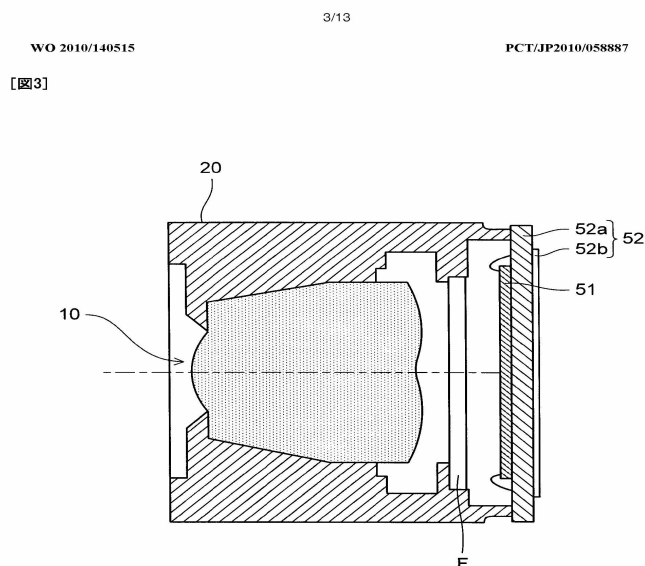
**G02B 13/003****{having two lenses}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

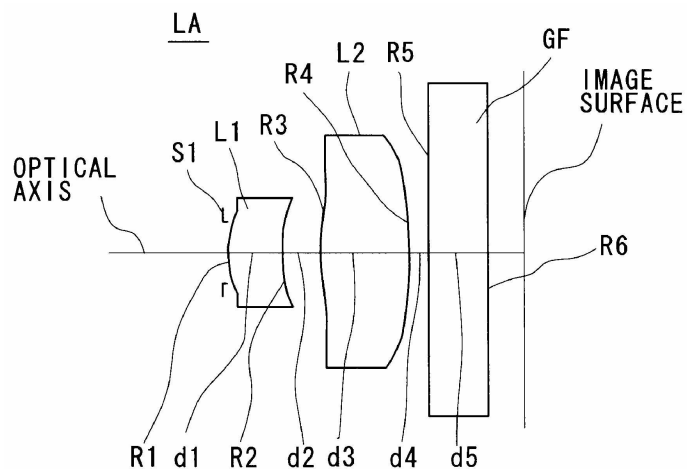


G02B 13/0035**{having three lenses}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

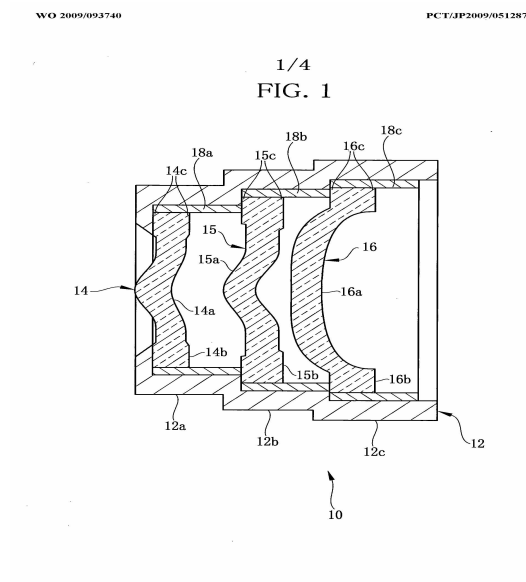**G02B 13/004****{having four lenses}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

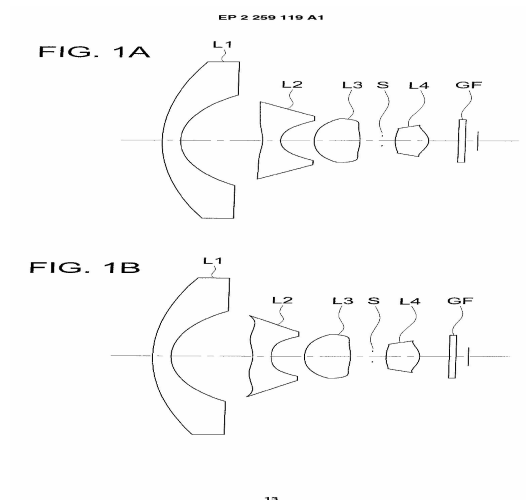


G02B 13/0045

{having five or more lenses}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

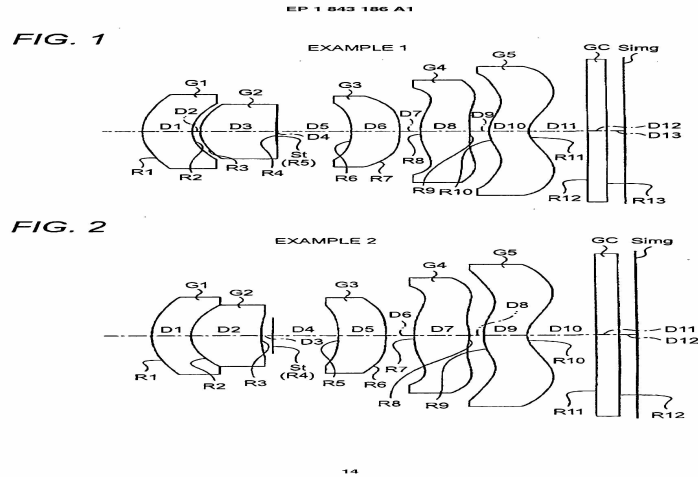


G02B 13/005

{having spherical lenses only}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

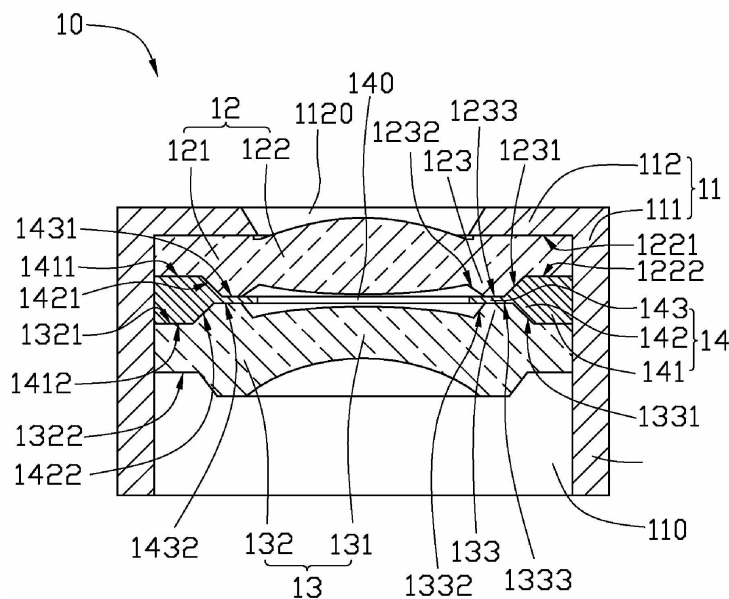

G02B 13/0055**{employing a special optical element}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

Patent Application Publication Dec. 23, 2004 Sheet 3 of 4 US 2004/0257667 A1

FIG. 5





FIG. 6




(as a tag, double classification with the group for the respective element)

G02B 13/006**{at least one element being a compound optical element, e.g. cemented elements}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

EP 2 023 176 A1


FIG. 2

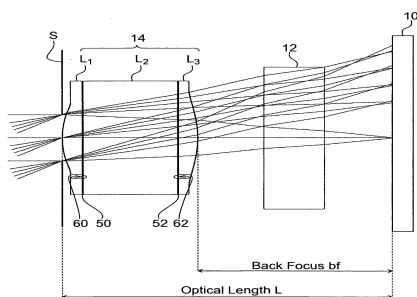


37

G02B 13/0065**{having a beam-folding prism or mirror}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

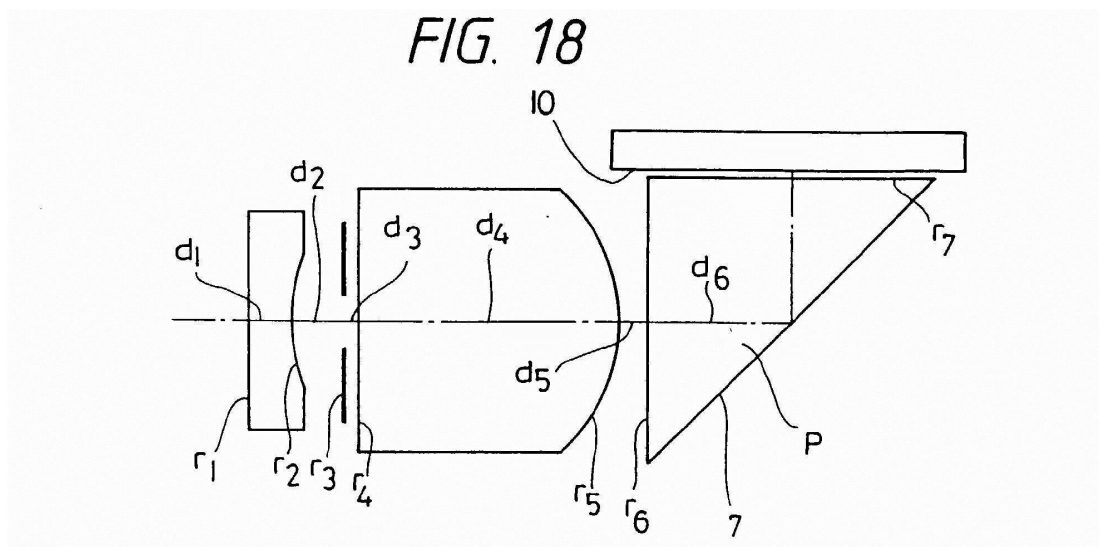**G02B 13/007****{the beam folding prism having at least one curved surface}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

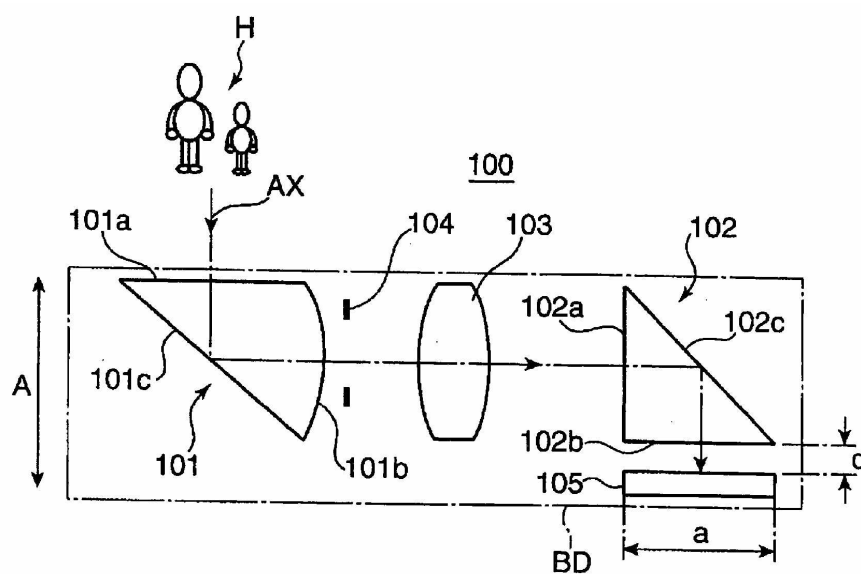

G02B 13/0075**{having an element with variable optical properties}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

Patent Application Publication Sep. 13, 2007 Sheet 7 of 7 US 2007/0211349 A1

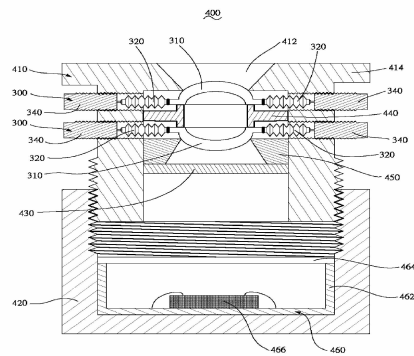



FIG. 7

(lenses 310 are deformed by exerting radial force on the lens bodies; other variable elements, diaphragm, LC-elements, etc.)

G02B 13/008**{designed for infrared light}****Definition statement***This place covers:*

Illustrative example of subject matter classified in this group:

WO 2008/145078 1/7 PCT/DE2008/000421

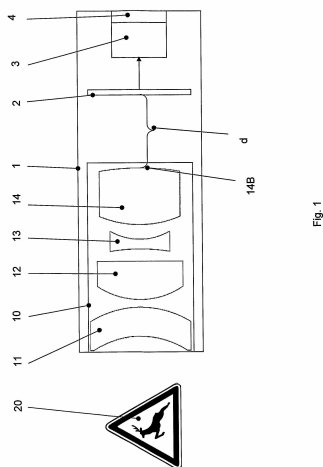

G02B 13/0085

{employing wafer level optics (lens arrays per se [G02B 3/0006](#))}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

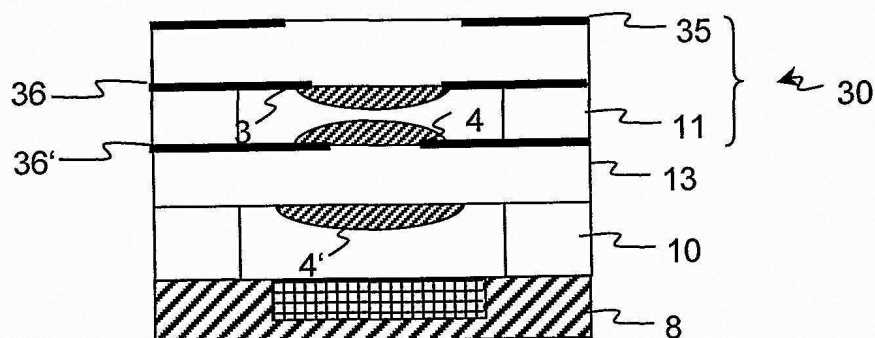


Fig. 13a

References**Informative references**

Attention is drawn to the following places, which may be of interest for search:

Lens arrays per se	G02B 3/0006
--------------------	-----------------------------


G02B 13/009

{having zoom function (zoom lenses per se [G02B 15/00](#))}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

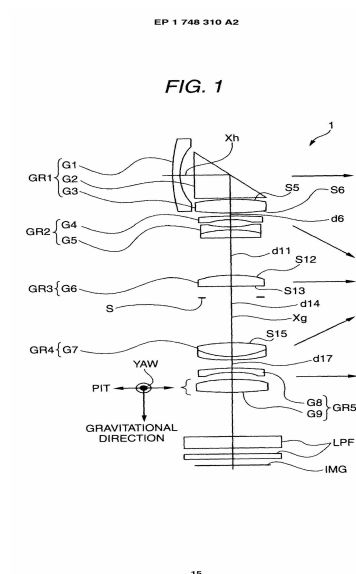

Details covered by [G02B 15/00](#) are to be classified there as well.

References**Informative references**

Attention is drawn to the following places, which may be of interest for search:

Zoom lenses per se	G02B 15/00
--------------------	----------------------------

G02B 13/06

Panoramic objectives; So-called "sky lenses" {including panoramic objectives having reflecting surfaces}

Definition statement

This place covers:

Objectives designed to cover a very wide field of view not achievable by standard lens systems.

For example:

- Very wide objectives, e.g. fisheye lenses, where the increase in coverage is done at the expense of distortion correction
- Reflecting optical systems
- Multiple lens systems providing an extended field coverage

References

Informative references

Attention is drawn to the following places, which may be of interest for search:

optical systems for splitting a field on multiple detectors	G02B 27/1066
---	------------------------------

Special rules of classification

[G02B 13/06](#) is also used to classify catadioptric optical systems providing a 360°overage

Rectilinear, e.g. non-distorting, wide angle objective are classified in [G02B 13/04](#)

Glossary of terms

In this place, the following terms or expressions are used with the meaning indicated:

Sky lens	Objective designed for full sky coverage, e.g. for an hemispheric field of view
----------	---

G02B 15/00

Optical objectives with means for varying the magnification (anamorphic objectives [G02B 13/08](#))

Definition statement

This place covers:

Optical objectives with means for varying the magnification, e.g. zoom lenses;

optical aspects thereof.

References

Limiting references

This place does not cover:

The mechanical aspects of zoom lenses (e.g. cam arrangements) are covered by	G02B 7/10
Simple miniaturized zoom lenses for mobile electronic devices	G02B 13/009
Anamorphic objectives with variable magnifications	G02B 13/12

Special rules of classification

Further details of subgroups

The following simplified arrangements are to be observed in relation to the optical layout of zoom objectives. The plus (+) symbol represents a positive lens group, and the minus (-) symbol represents a negative lens group. The symbol "..." represents any subsequent groups (positive or negative):

- ... :[G02B 15/177](#)

+ - ... :[G02B 15/161](#)

+ - - ... :[G02B 15/17](#)

+ - + ... :[G02B 15/173](#)

+ + - ... :[G02B 15/163](#)

Synonyms and Keywords

Lens group	A set of one or more lenses that stay fixed or move together.
------------	---

G02B 17/00

Systems with reflecting surfaces, with or without refracting elements (microscopes [G02B 21/00](#); telescopes, periscopes [G02B 23/00](#); for beam splitting or combining [G02B 27/10](#); for optical projection [G02B 27/18](#))


Definition statement

This place covers:

Systems with reflecting surfaces, with or without refracting elements, e.g. catoptric systems, catadioptric systems

[G02B 17/00](#), as the main group, is only for reflecting systems which do not fit into any of the sub-groups.

Example: a polar to rectangular coordinates converter:

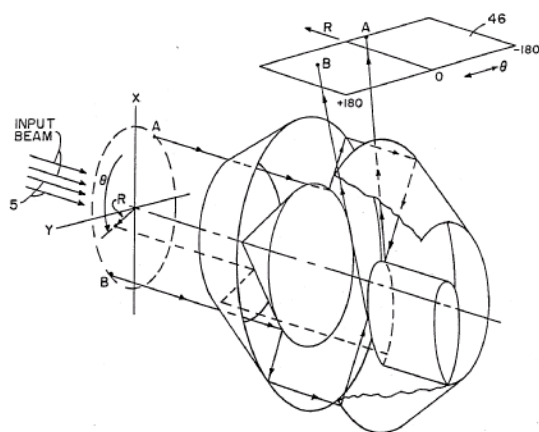

References

Limiting references

This place does not cover:

Panoramic objectives	G02B 13/06
Reflective microscope objectives	G02B 21/04
Telescopes, periscopes	G02B 23/00
Scanning optics with mirrors	G02B 26/126
Beamsplitters or combiners	G02B 27/10
Devices for optical projection	G02B 27/18
Optical derotators, e.g. rotating dove prisms	G02B 27/642

Special rules of classification

[G02B 17/00](#) in general should be seen as an optical design group.

The division with [G02B 17/08](#) (catadioptric systems) is strict, the presence of any refracting element having power or asphere to correct the aberrations of the system qualifies the combination as catadioptric.

Solid systems (where the air is replaced by glass) are also catadioptric, even with zero power air interfaces.

Some application specific mirror systems relating to [G02B](#) are covered by groups outside this main group. However details might be classified in [G02B 17/00](#). Examples are:

- [G02B 13/06](#): Panoramic lenses takes precedence and should not be classified in [G02B 17/06](#) or [G02B 17/08](#).
- [G02B 26/126](#): Optical F-theta scanner lenses with mirrors.
- [G02B 21/04](#): Reflective microscope objective.
- [G02B 27/642](#): Derotators

Glossary of terms

In this place, the following terms or expressions are used with the meaning indicated:

Zero power surface	a flat reflective or refractive surface without optical power, i.e. having no converging or diverging effect on light
--------------------	---


G02B 17/002

{Arrays of reflective systems}

Definition statement

This place covers:

Arrays of reflective systems. This is essentially to mirror systems what lens arrays are for lenses. The class can be combined with other [G02B 17/02](#), [G02B 17/04](#), [G02B 17/06](#), [G02B 17/08](#) classes describing the optical design.

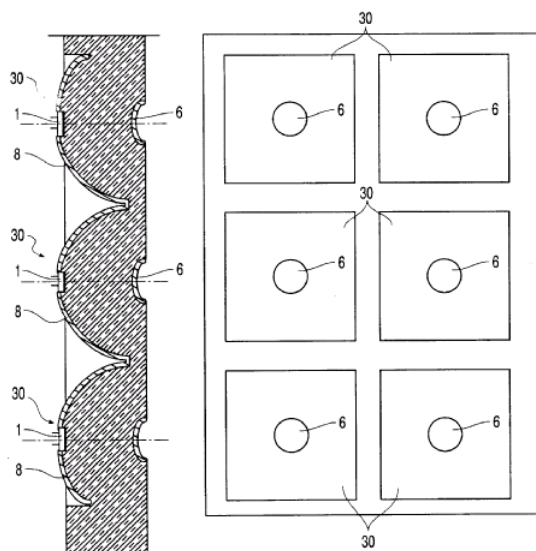


G02B 17/004

{Systems comprising a plurality of reflections between two or more surfaces, e.g. cells, resonators (multipass arrangements for optical cuvettes [G01N 21/031](#); laser resonators [H01S 3/05](#))}

Definition statement

This place covers:

Systems comprising multiple reflections between at least two reflecting surfaces, e.g. cells, resonators. This subgroup covers both catadioptric and catoptric systems, as the number of documents is too small to justify a division between [G02B 17/06](#) and [G02B 17/08](#).

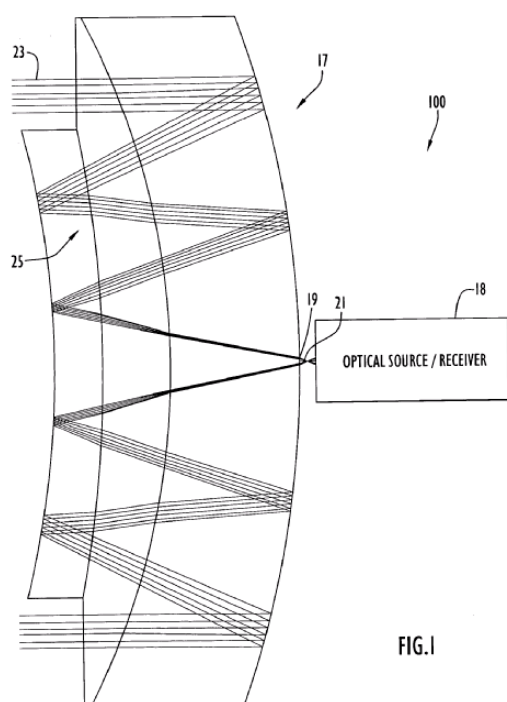

References

Informative references

Attention is drawn to the following places, which may be of interest for search:

Multipass "cuvettes" in spectrophotometers	G01N 21/031
Laser cavities	H01S 3/00


G02B 17/006

{Systems in which light is reflected on a plurality of parallel surfaces, e.g. louvre mirrors, total internal reflection [TIR] lenses (Fresnel mirrors [G02B 5/09](#), Fresnel lenses [G02B 3/08](#))}

Definition statement


This place covers:

Systems in which the light is reflected on a plurality of parallel laminas (venetian blind lens, louvre mirror, TIR - total internal reflection lens). This subgroup covers both catadioptric and catoptric systems, as the number of documents is too small to justify a division between [G02B 17/06](#) and [G02B 17/08](#). Fresnel mirrors are in [G02B 5/09](#).

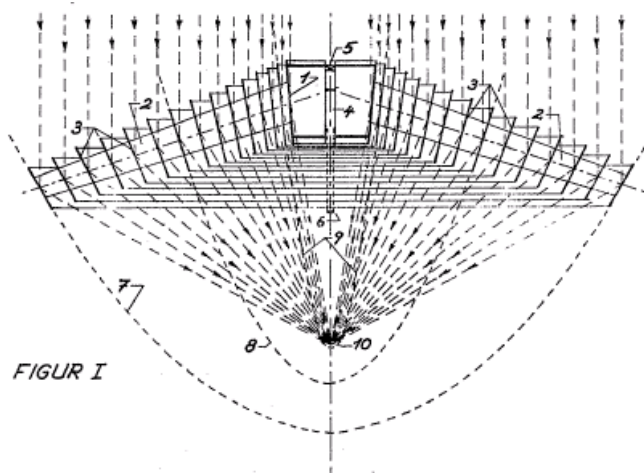


G02B 17/008**{Systems specially adapted to form image relays or chained systems}****Definition statement***This place covers:*

Reflective systems specially adapted to form relays or chainable optical systems. Mainly unit magnification systems like Dyson optics or Offner relays.

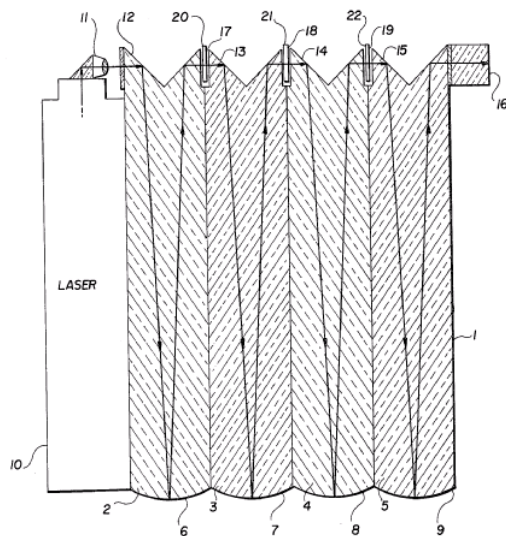**G02B 17/02****Catoptric systems, e.g. image erecting and reversing system****Definition statement***This place covers:*

Sequences of flat reflective (zero power) surfaces made of mirrors and prisms.

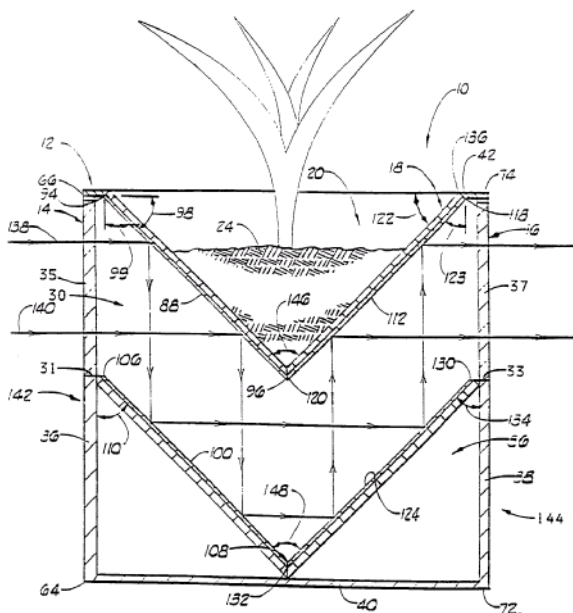

References

Informative references

Attention is drawn to the following places, which may be of interest for search:

Sequences of flat reflective (zero power) surfaces using prisms only	G02B 17/04
--	----------------------------

G02B 17/023


{for extending or folding an optical path, e.g. delay lines}

Definition statement

This place covers:

Essentially sequences of flat mirrors to extend a path length, e.g. in a flatbed scanner.

For extending an optical path length, e.g. delay lines

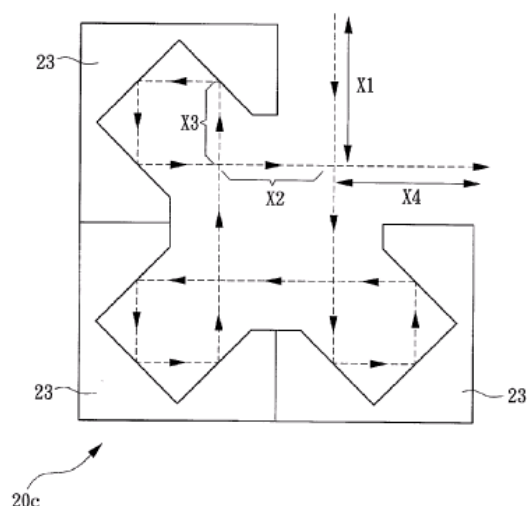

G02B 17/026


{having static image erecting or reversing properties only ([G02B 17/045](#) takes precedence; optical derotators [G02B 27/642](#); optical devices for controlling the direction of light using movable or deformable optical elements [G02B 26/08](#))}

Definition statement

This place covers:

Image erecting and reversing systems, beam redirecting.

Static systems for changing the direction of a beam or pivoting an image

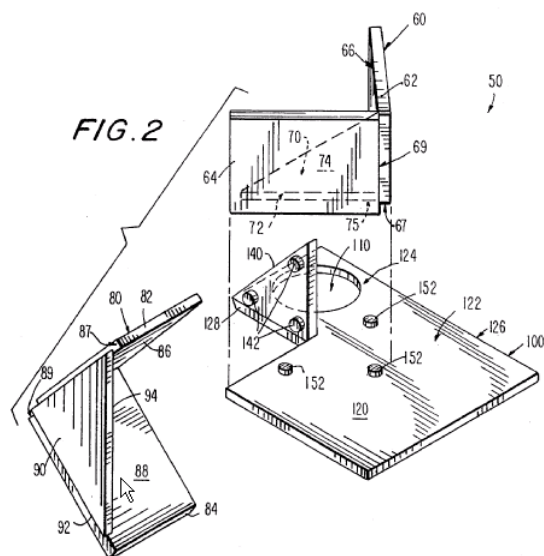

References


Limiting references

This place does not cover:

Prismatic systems with reflecting surfaces having static image erecting or reversing properties only	G02B 17/045
Movable reflecting elements for controlling the direction of light	G02B 26/08
optical derotators	G02B 27/642

G02B 17/04**using prisms only****Definition statement***This place covers:*


Prism sequences as far as the reflecting surfaces have no power. Powered prisms generally go in the catadioptric class [G02B 17/08](#) (unless an image erecting effect is produced).

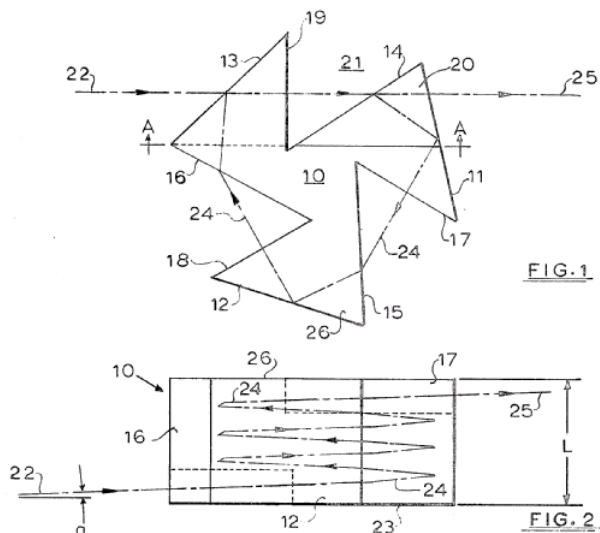**G02B 17/045**


{having static image erecting or reversing properties only (optical derotators [G02B 27/642](#); optical devices for controlling the direction of light using movable or deformable optical elements [G02B 26/08](#))}

Definition statement*This place covers:*

Image erecting and reversing systems, including classical erecting prisms. Similar to [G02B 17/026](#), but with prisms only. Some overlap with [G02B 5/04](#) and [G02B 27/14](#).

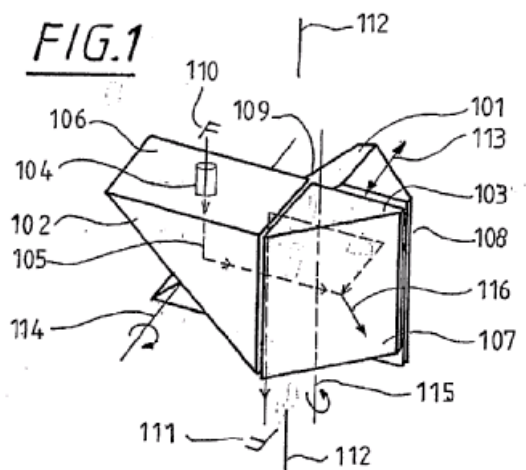

The class might also be given for solid catadioptric systems that integrate an erecting function.

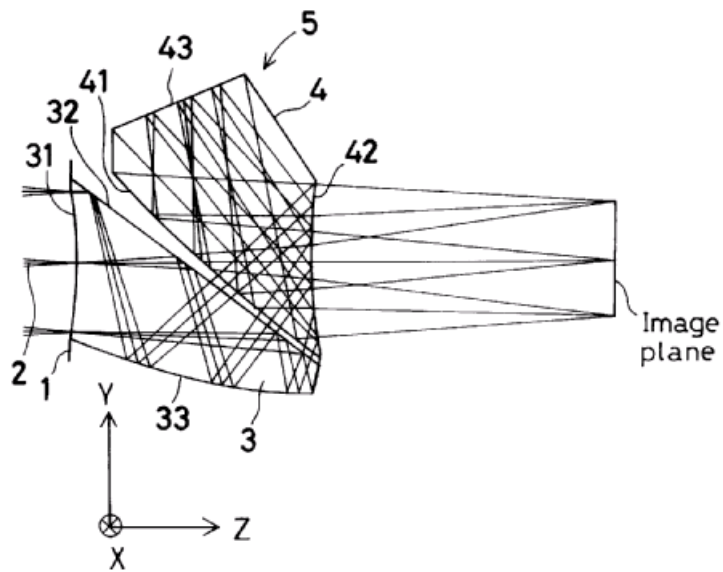

References

Limiting references

This place does not cover:

Movable or deformable reflecting elements for controlling the direction of light	G02B 26/08
Optical derotators	G02B 27/642

G02B 17/06

using mirrors only {, i.e. having only one curved mirror (used in non-imaging applications [G02B 19/00](#))}

Definition statement

This place covers:

Systems comprising mirrors only.

combinations of a single curved mirror (on or off axis) with any number of plane mirrors go into the group [G02B 17/06](#). Single segmented mirrors are classified in [G02B 5/09](#). Synthetic aperture systems ([G02B 27/58](#))

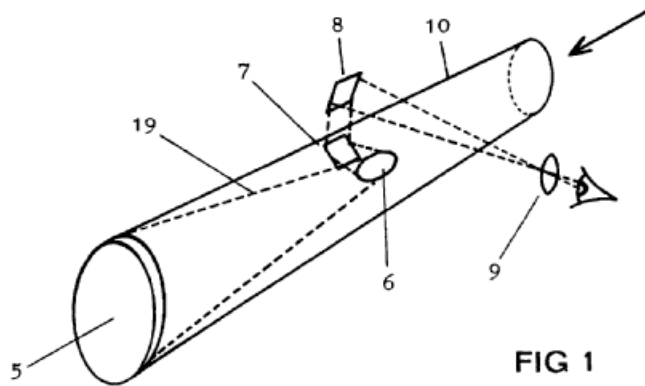


FIG 1

References

Limiting references

This place does not cover:

Mirror based non imaging systems	G02B 19/00
----------------------------------	----------------------------

Special rules of classification

Further details of subgroups

The subgroups [G02B 17/0605](#), [G02B 17/0626](#) and [G02B 17/0647](#) relate to systems having 2 mirrors, 3 mirrors and more than 3 mirrors respectively, and are strictly imaging groups, including linear field imaging systems (scanner optics).

The structure of these groups, by way of example for [G02B 17/0605](#) is the following:

- [G02B 17/0605](#) On axis systems without a central aperture.
- [G02B 17/061](#) On axis systems, with at least one central aperture.
- [G02B 17/0615](#) Off-axis, unobscured, optical systems, the mirrors having a common optical axis.
- [G02B 17/0621](#) Off-axis or unobscured optical systems, the mirrors without a common optical axis, e.g. the mirrors have tilts and decenters. This includes also so-called free-form surfaces without rotational symmetry.

The general rule is to count the number of optical surfaces relevant for the optical design process:

- An optical surface on which the beam is reflected twice counts as one mirror, however single mirror having multiple zones figured with different optical surfaces counts as two mirrors.
- Simple flat folding mirrors are normally not counted when they are not essential to the invention, e.g. not relevant in the lens design process, for example a folding mirror.
- Flat mirrors are counted when they are used to achieve a double reflexion on the same mirror, e.g. when a powered mirror surface is used twice. Flat reflecting surfaces in solid catadioptric systems count also.
- When several systems are chained together, e.g. a telescope and a relay, the subsystems are counted and classified individually.


G02B 17/0605

{using two curved mirrors ([G02B 17/0668](#), [G02B 17/0694](#) take precedence)}

Definition statement

This place covers:

On axis systems, without a central aperture.

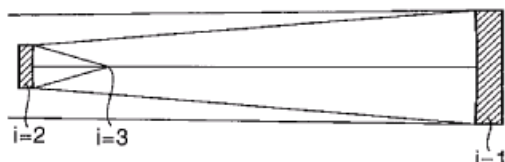**References****Limiting references**

This place does not cover:

Having non-imaging properties	G02B 17/0668
With variable magnification or multiple imaging planes, including multispectral systems	G02B 17/0694


G02B 17/061

{on-axis systems with at least one of the mirrors having a central aperture}

Definition statement

This place covers:

On axis systems, with at least one central aperture.

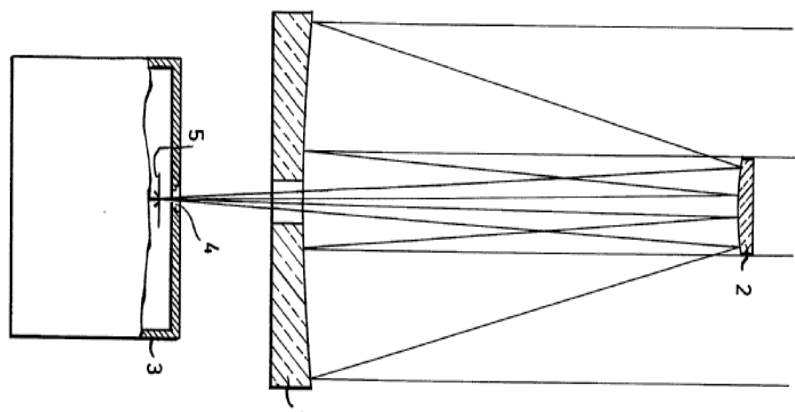

G02B 17/0615

{off-axis or unobscured systems in which all of the mirrors share a common axis of rotational symmetry}

Definition statement

This place covers:

Off-axis, unobscured, optical systems, the mirrors having a common optical axis.

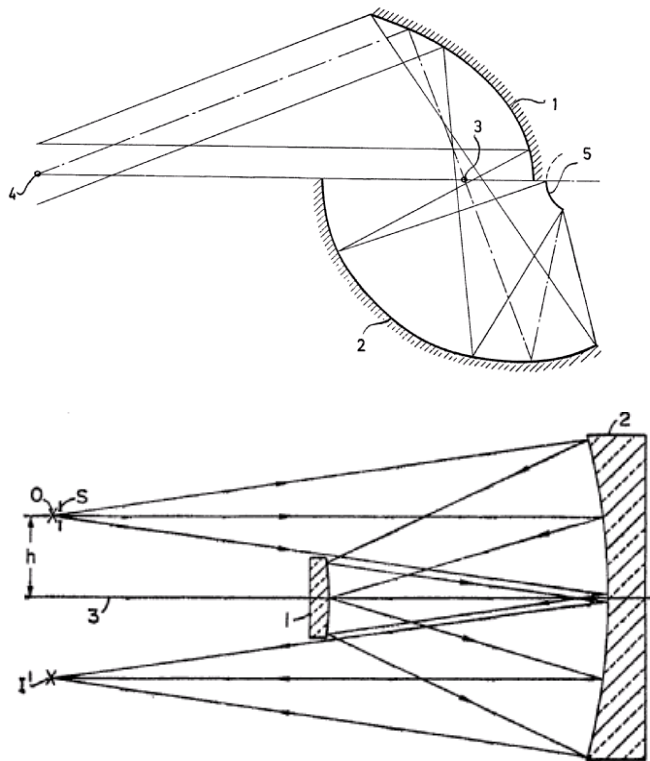


FIG. 1


G02B 17/0621

{off-axis or unobscured systems in which not all of the mirrors share a common axis of rotational symmetry, e.g. at least one of the mirrors is warped, tilted or decentered with respect to the other elements}

Definition statement

This place covers:

- Off-axis or unobscured optical systems, the mirrors without a common optical axis, e.g. the mirrors have tilts and decenters. This includes also so-called free-form surfaces without rotational symmetry.

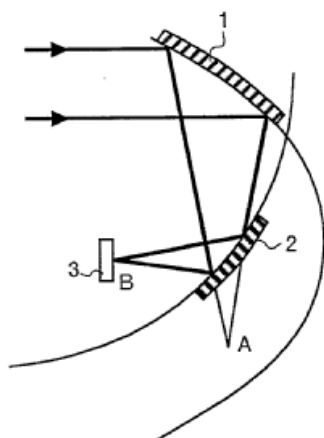


G02B 17/0626

{using three curved mirrors ([G02B 17/0668](#), [G02B 17/0694](#) take precedence)}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

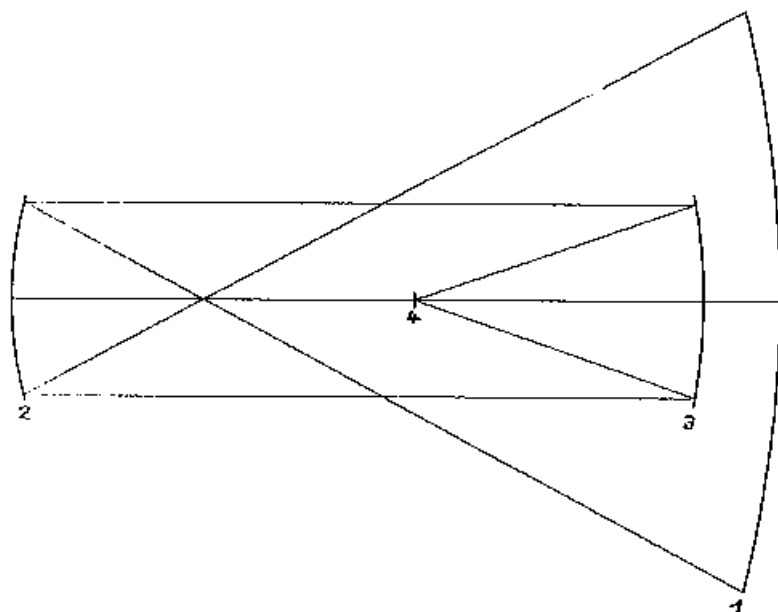

References

Limiting references

This place does not cover:

Having non-imaging properties	G02B 17/0668
With variable magnification or multiple imaging planes, including multispectral systems	G02B 17/0694

G02B 17/0631


{on-axis systems with at least one of the mirrors having a central aperture}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

mirror 2 is actually two mirrors 1 and 3.

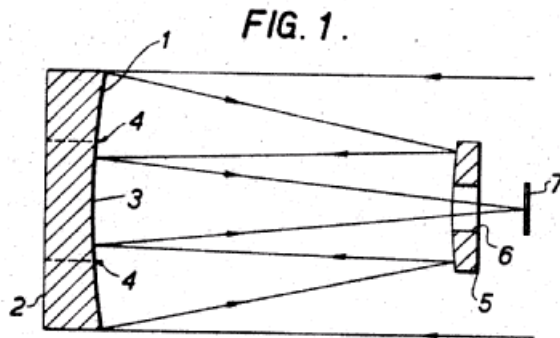
**G02B 17/0636**

{off-axis or unobscured systems in which all of the mirrors share a common axis of rotational symmetry}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

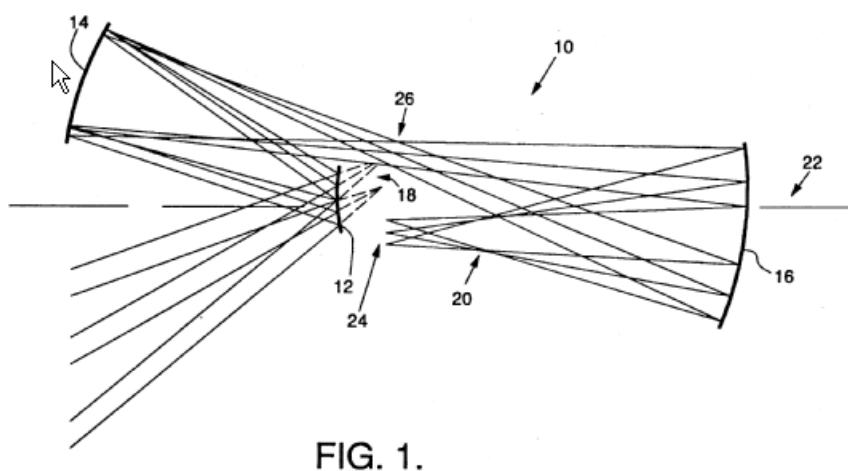

G02B 17/0642


{off-axis or unobscured systems in which not all of the mirrors share a common axis of rotational symmetry, e.g. at least one of the mirrors is warped, tilted or decentered with respect to the other elements}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

Kompakter 3M-Schiefspiegler, Doppelreflexion am 2.Spiegel

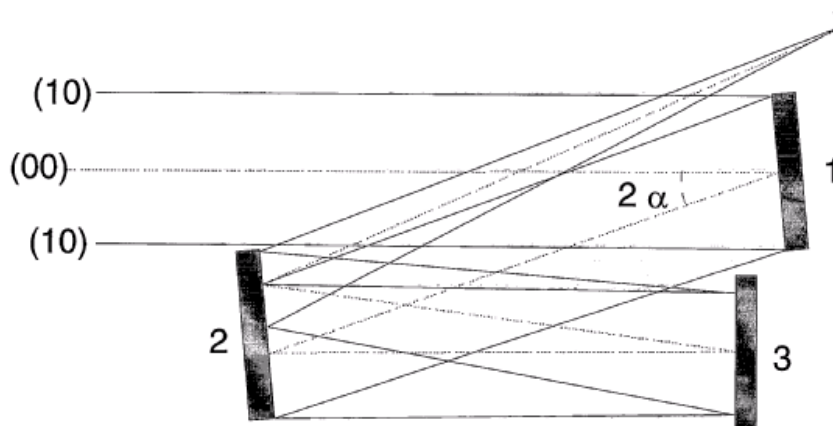
**G02B 17/0652**


{on-axis systems with at least one of the mirrors having a central aperture}

Definition statement

This place covers:

Illustrative examples of subject matter classified in this group:

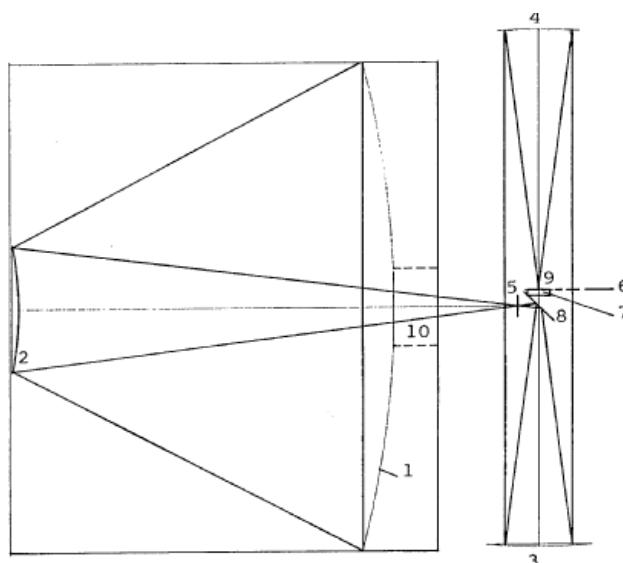

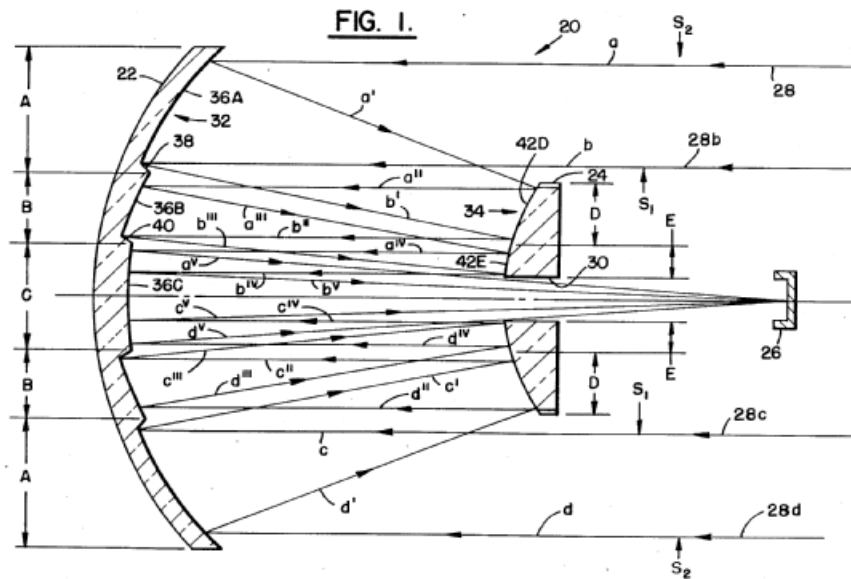


G02B 17/0657

{off-axis or unobscured systems in which all of the mirrors share a common axis of rotational symmetry}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

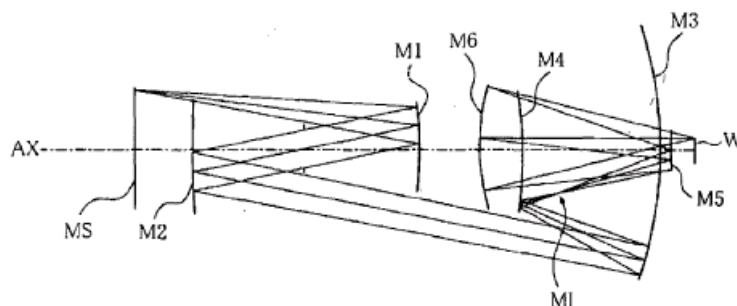


G02B 17/0663

{off-axis or unobscured systems in which not all of the mirrors share a common axis of rotational symmetry, e.g. at least one of the mirrors is warped, tilted or decentered with respect to the other elements}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

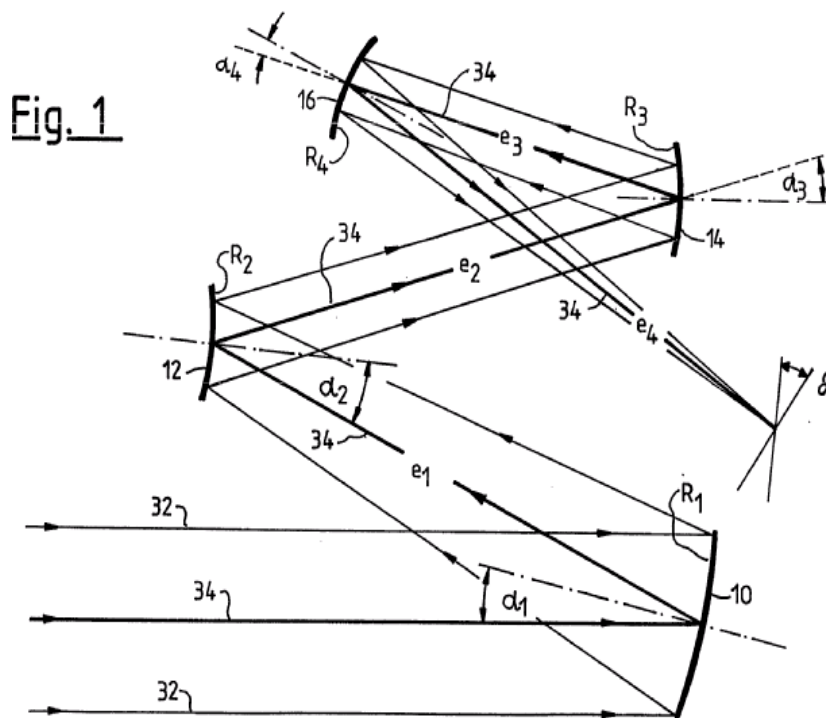**G02B 17/0668**

{having non-imaging properties}

Definition statement


This place covers:

Non imaging systems.

Devices that are not emitter or receiver specific.

The group has been subdivided to cover systems disclosed as being used to illuminate a detector, or used in close conjunction with a light source (e.g. for LED illumination). Often the emitter/detector is an integral part of the device. Reflecting pipes are in [G02B 27/0994](#) or [G02B 6/00](#).

Example: a non-imaging system in the form of a rotating optical joint

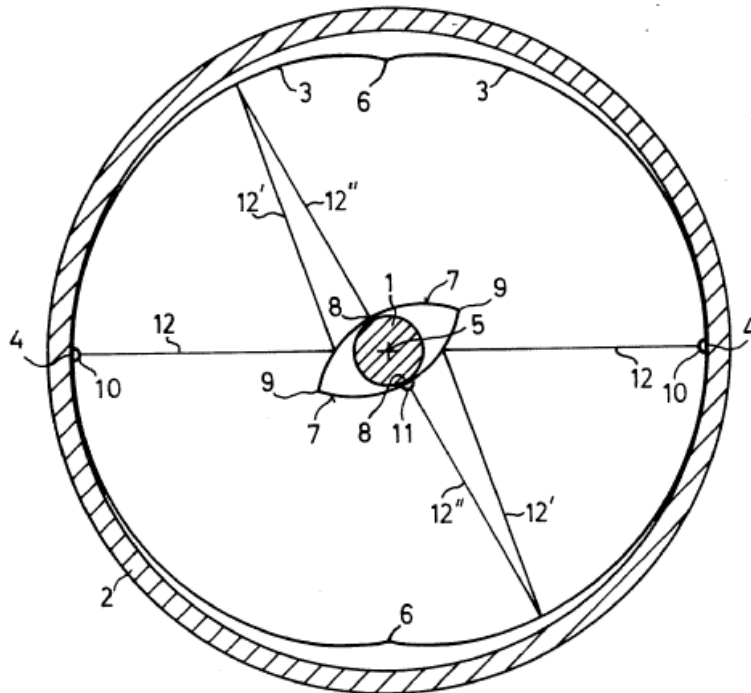

Special rules of classification

Further details of subgroups

[G02B 17/0673](#) ..for light condensing (emitters)

[G02B 17/0678](#) ... in a 360° plane or hemisphere

[G02B 17/0684](#) ...for light collecting (receivers)

[G02B 17/0689](#) ...in a 360° plane or hemisphere

G02B 17/0694

{with variable magnification or multiple imaging planes, including multispectral systems (systems with only refractive elements [G02B 15/14](#))}

Definition statement

This place covers:

Zoom mirror systems, but also multiple focus or multiple magnification systems, and systems having both large and small FOVs.

G02B 17/08

Catadioptric systems {(used in non-imaging applications [G02B 19/00](#))}


Definition statement

This place covers:

Catadioptric systems

This group is subdivided according to the same scheme as the systems of [G02B 17/06](#).

In addition, subgroups have been added to cover the structure or function of the refractive element.

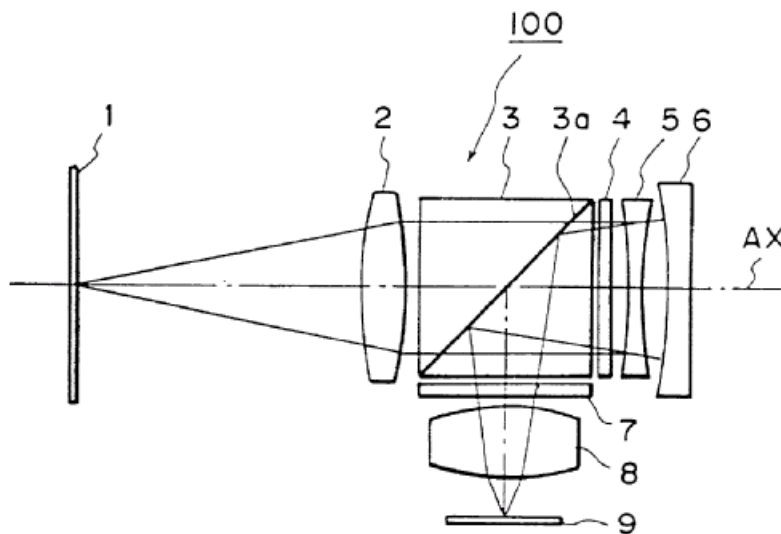

Special rules of classification

Further details of subgroups

[G02B 17/0852](#): Field Corrector

Systems where a set of field lenses correct the aberrations of the mirrors.

The field corrector definition should be taken broadly to include systems where all lenses are located between the focal plane and the first mirror (starting from the FP).

Systems with field flattener lenses and pupil correctors get also this class when the design of the field corrector is detailed or discussed.

[G02B 17/0884](#): Pupil Corrector

The pupil corrector having spherical surfaces, e.g. Maksutov or Houghton telescopes

[G02B 17/0888](#): Pupil Corrector

The pupil corrector having an aspheric surface, e.g. Schmidt camera

[G02B 17/0856](#) : Mangin mirror, i.e. a lens with a mirrored surface

[G02B 17/086](#): Solid Catadioptric, e.g. comprising solid blocks

[G02B 17/0864](#): Non imaging catadioptric

The [G02B 17/0864](#) subgroup is subdivided according to the same scheme as the systems of [G02B 17/0668](#).

[G02B 17/0892](#): Specially adapted for UV (includes lithography objectives even without an explicit UV reference)

[G02B 17/0896](#): With means for varying the magnification or providing a plurality of image planes from a single pupil (same rules as for [G02B 17/0694](#))

The following table gives examples of patent documents classified in the subgroups of [G02B 17/06](#) or [G02B 17/08](#):


G02B 17/0804

{using two curved mirrors ([G02B 17/0864](#), [G02B 17/0896](#) takes precedence)}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

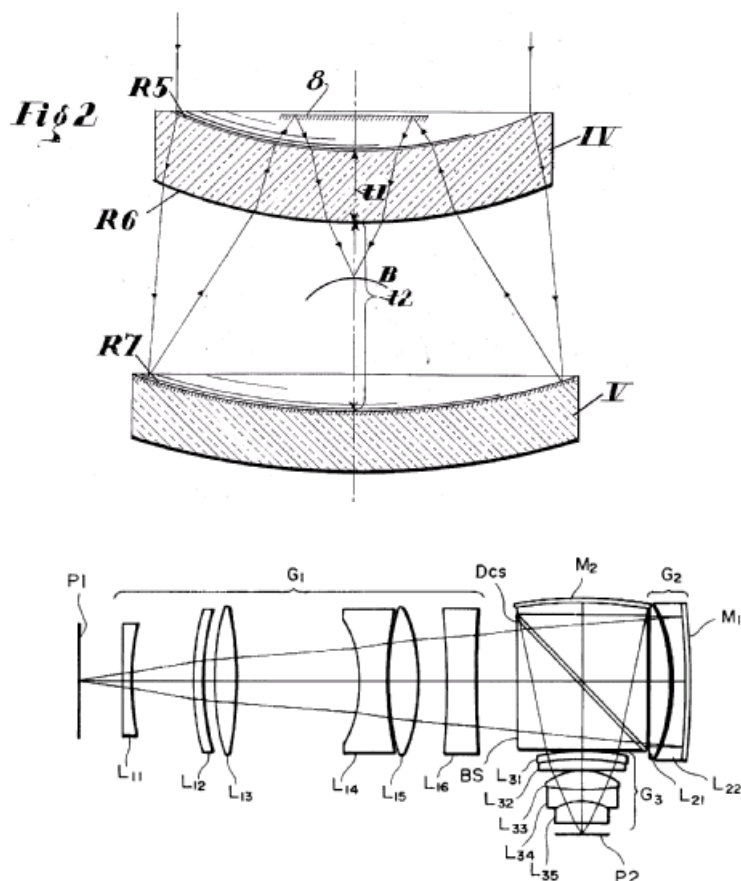**References****Limiting references**

This place does not cover:

Having non-imaging properties	G02B 17/0668
With variable magnification or multiple imaging planes, including multispectral systems	G02B 17/0694


G02B 17/0808

{on-axis systems with at least one of the mirrors having a central aperture}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

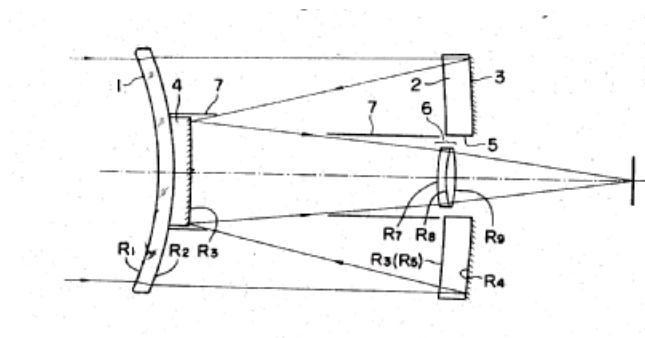
**G02B 17/0812**


{off-axis or unobscured systems in which all of the mirrors share a common axis of rotational symmetry}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

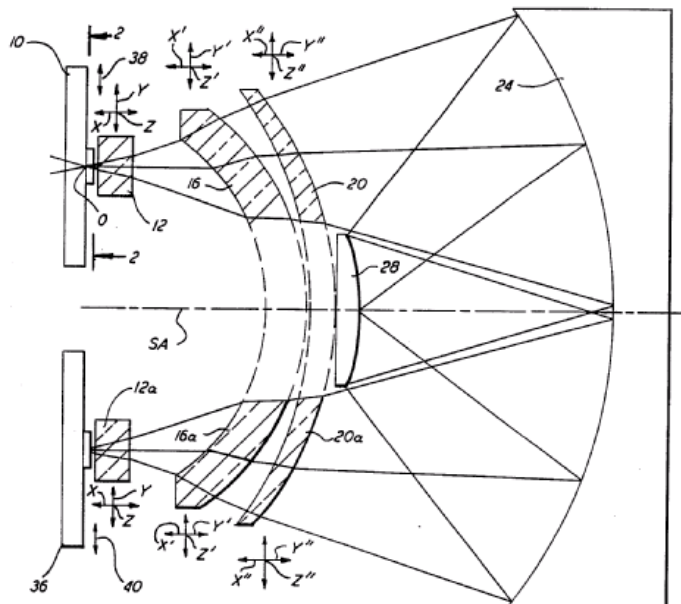

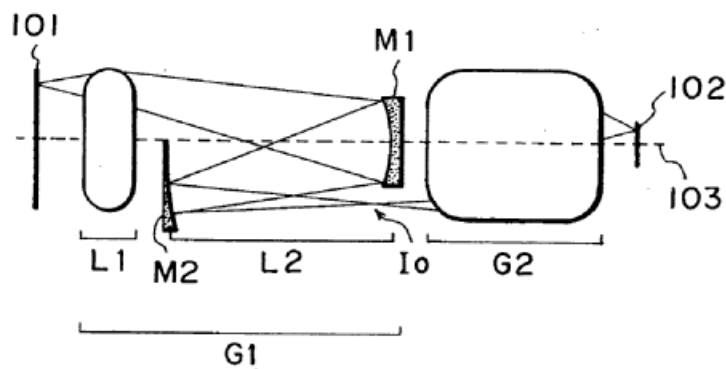


G02B 17/0816

{off-axis or unobscured systems in which not all of the mirrors share a common axis of rotational symmetry, e.g. at least one of the mirrors is warped, tilted or decentered with respect to the other elements}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

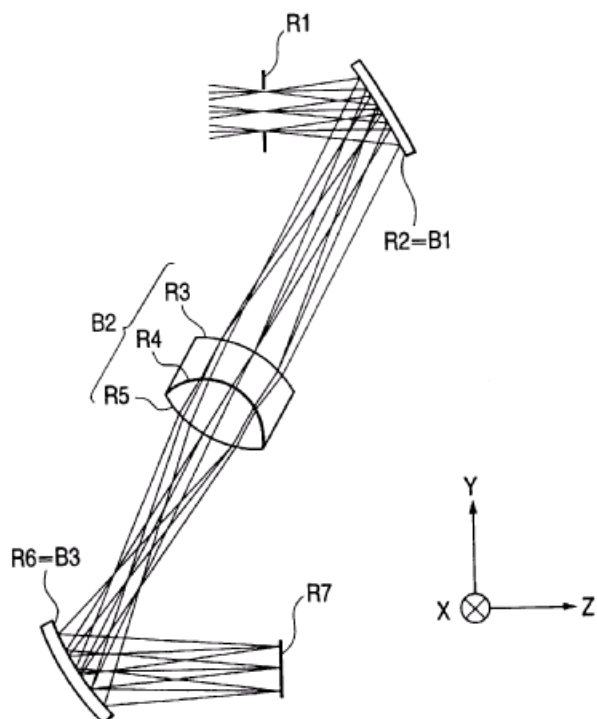


G02B 17/082

{using three curved mirrors ([G02B 17/0864](#), [G02B 17/0896](#) take precedence)}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

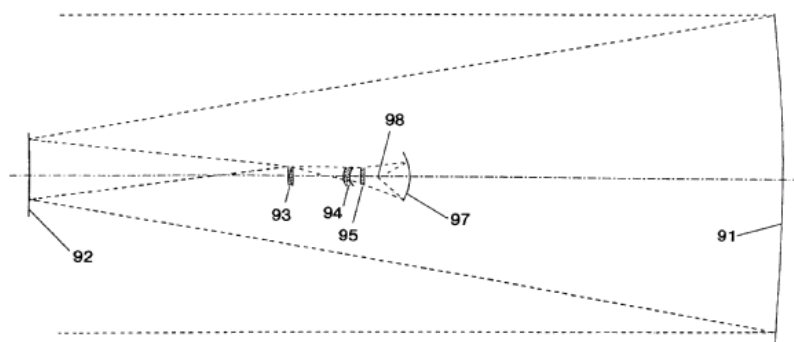**References****Limiting references**

This place does not cover:

Having non-imaging properties	G02B 17/0668
With variable magnification or multiple imaging planes, including multispectral systems	G02B 17/0694


G02B 17/0824

{on-axis systems with at least one of the mirrors having a central aperture}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

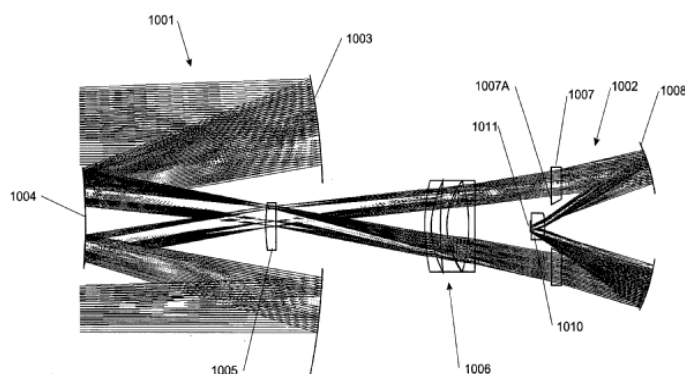


G02B 17/0828

{off-axis or unobscured systems in which all of the mirrors share a common axis of rotational symmetry}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

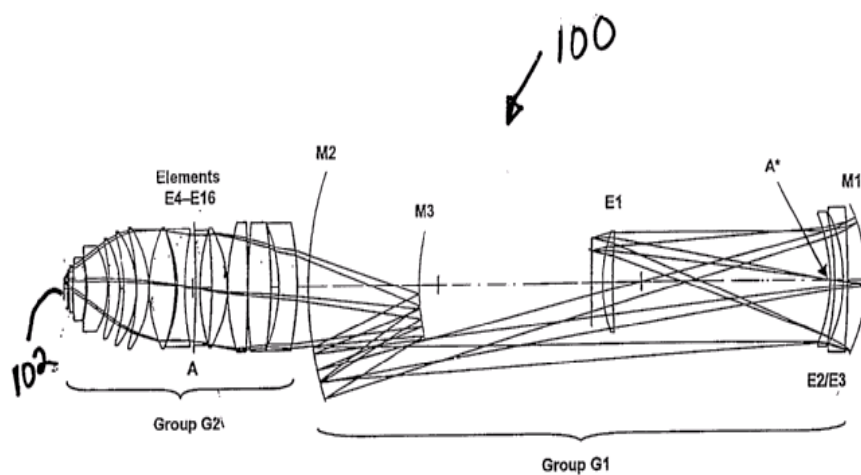


G02B 17/0832


{off-axis or unobscured systems in which not all of the mirrors share a common axis of rotational symmetry, e.g. at least one of the mirrors is warped, tilted or decentered with respect to the other elements}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

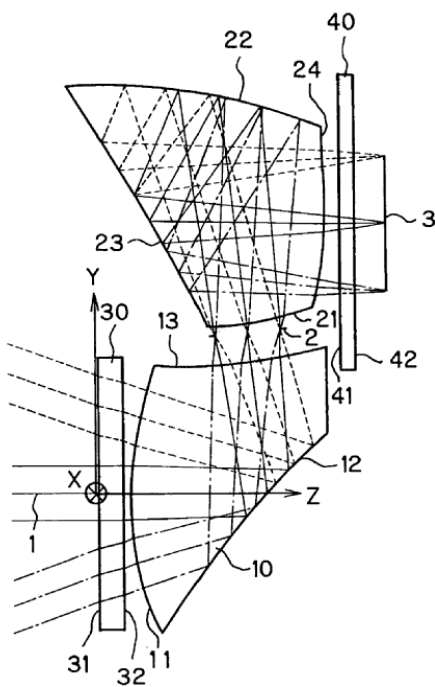

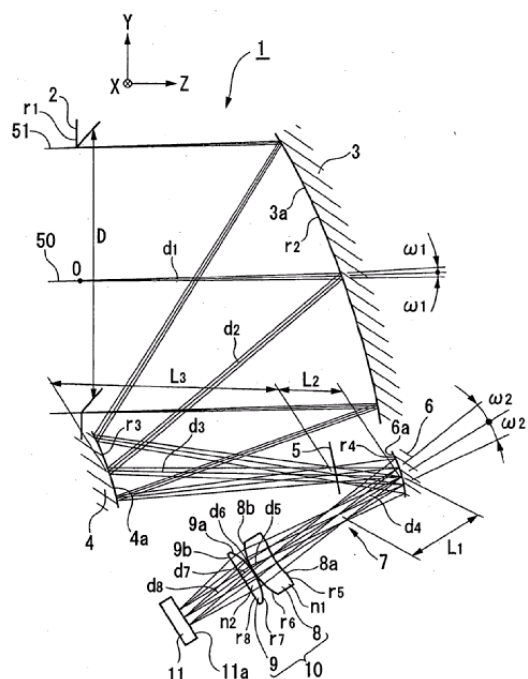


G02B 17/084

{on-axis systems with at least one of the mirrors having a central aperture}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

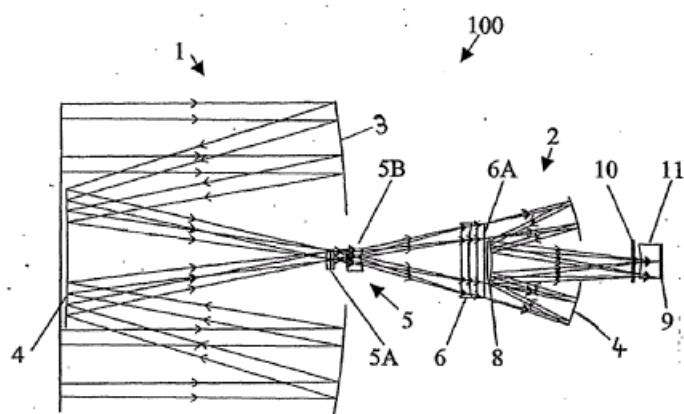


G02B 17/0844

{off-axis or unobscured systems in which all of the mirrors share a common axis of rotational symmetry}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

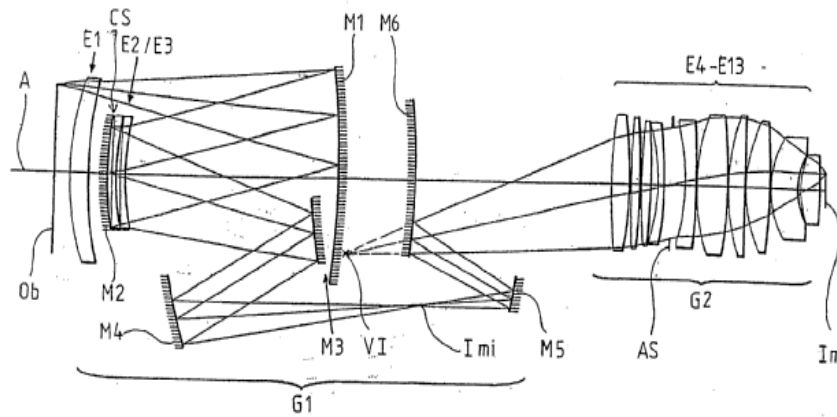


G02B 17/0848

{off-axis or unobscured systems in which not all of the mirrors share a common axis of rotational symmetry, e.g. at least one of the mirrors is warped, tilted or decentered with respect to the other elements}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

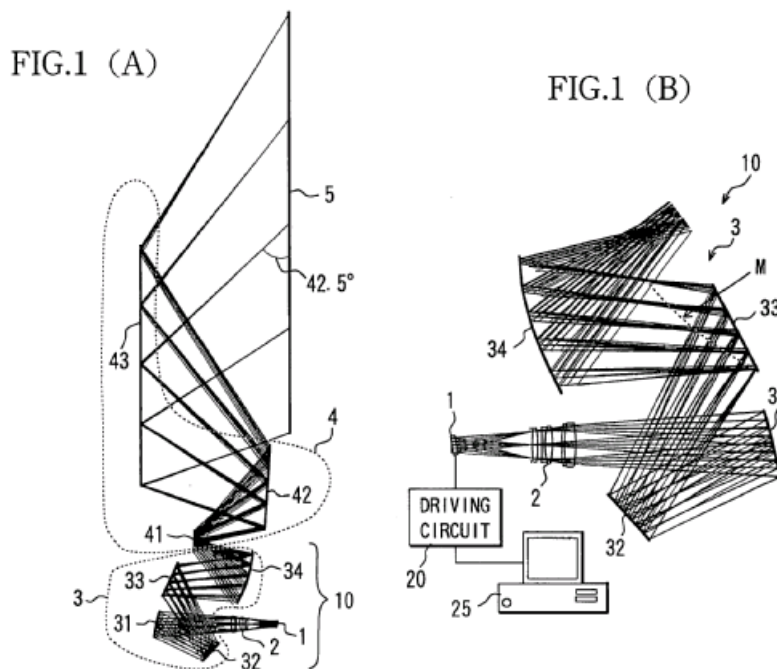
**G02B 17/0852**

{having a field corrector only}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

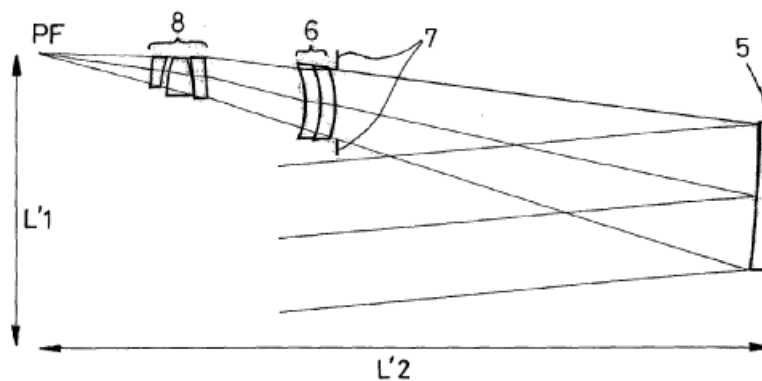


G02B 17/0856

{comprising a refractive element with a reflective surface, the reflection taking place inside the element, e.g. Mangin mirrors}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

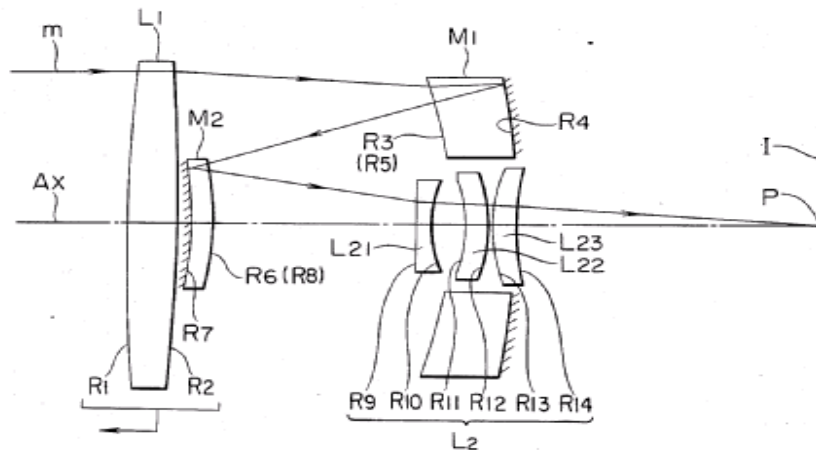


G02B 17/086


{wherein the system is made of a single block of optical material, e.g. solid catadioptric systems}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

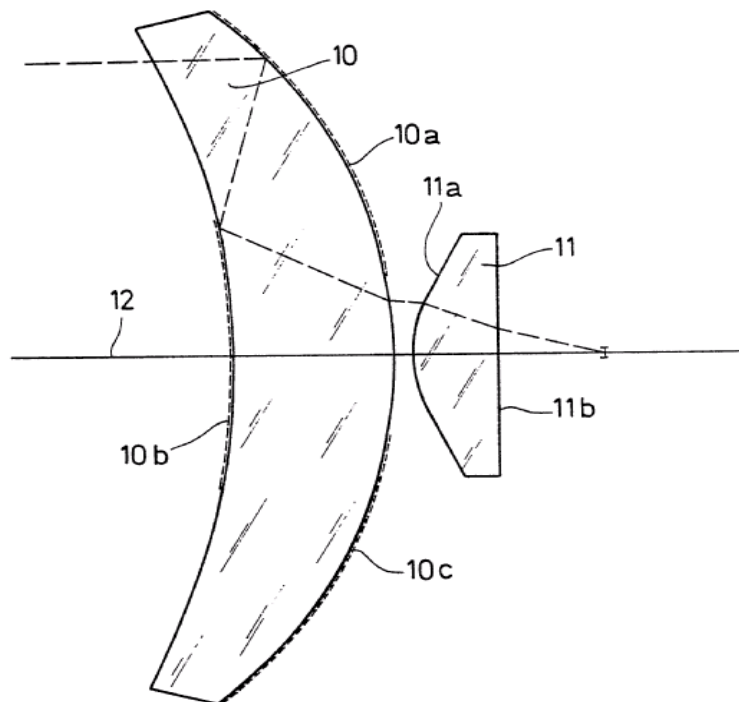

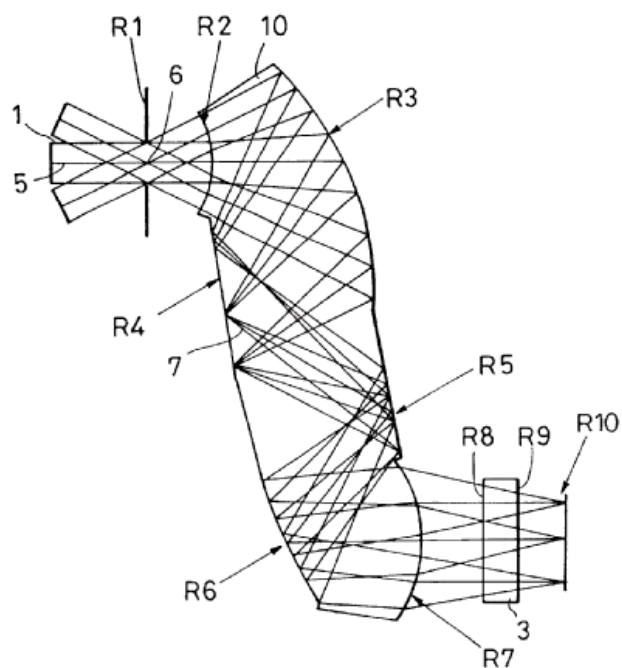


G02B 17/0884

{having a pupil corrector}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

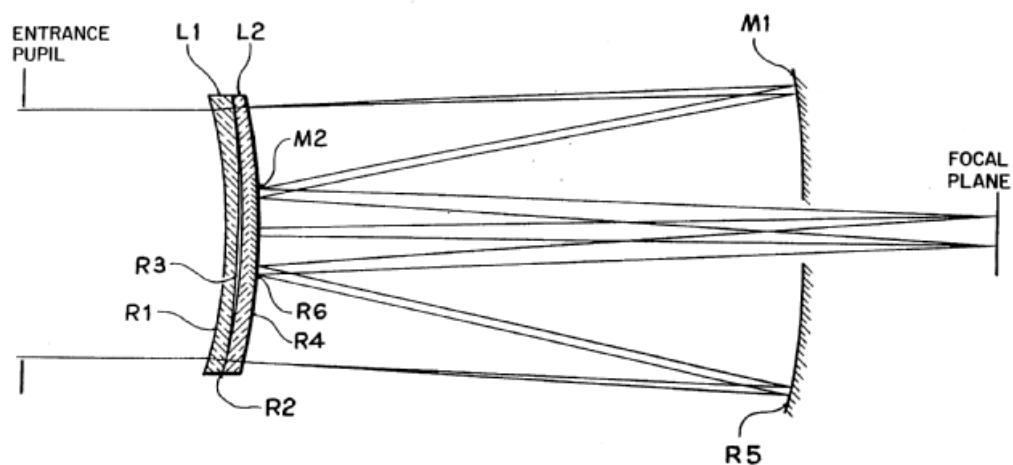


G02B 17/0888

{the corrector having at least one aspheric surface, e.g. Schmidt plates}

Definition statement

This place covers:

Illustrative example of subject matter classified in this group:

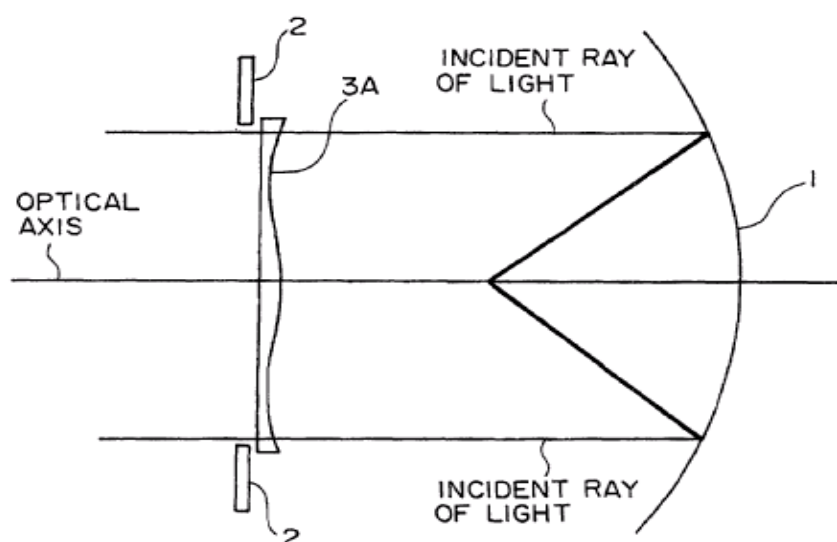**G02B 19/00**

Condensers, {e.g. light collectors or similar non-imaging optics} (for microscopes [G02B 21/08](#))

Definition statement

This place covers:

Optical condensers, light collectors and similar non-imaging optics.

References**Limiting references**

This place does not cover:

Illumination arrangement in microscopes	G02B 21/08
---	----------------------------

Informative references


Attention is drawn to the following places, which may be of interest for search:

Lighting	F21V
Solar heat collectors	F24J 2/00
Optical elements combined with semiconductor receivers	H01L 31/0232
Optical elements combined with semiconductor emitters	H01L 33/58


Special rules of classification

Concerning optical arrangements for illumination from LEDs, the practice is to classify in [G02B 19/0061](#) (or [G02B 19/0066](#) for LED arrays) and in one or more other classes under [G02B 19/00](#) according to the optical means employed. In particular:


- Arrangements involving refractive surfaces only, at least one surface having optical power, and adapted for a single LED are classified in [G02B 19/0061](#) and in [G02B 19/0014](#). For example:

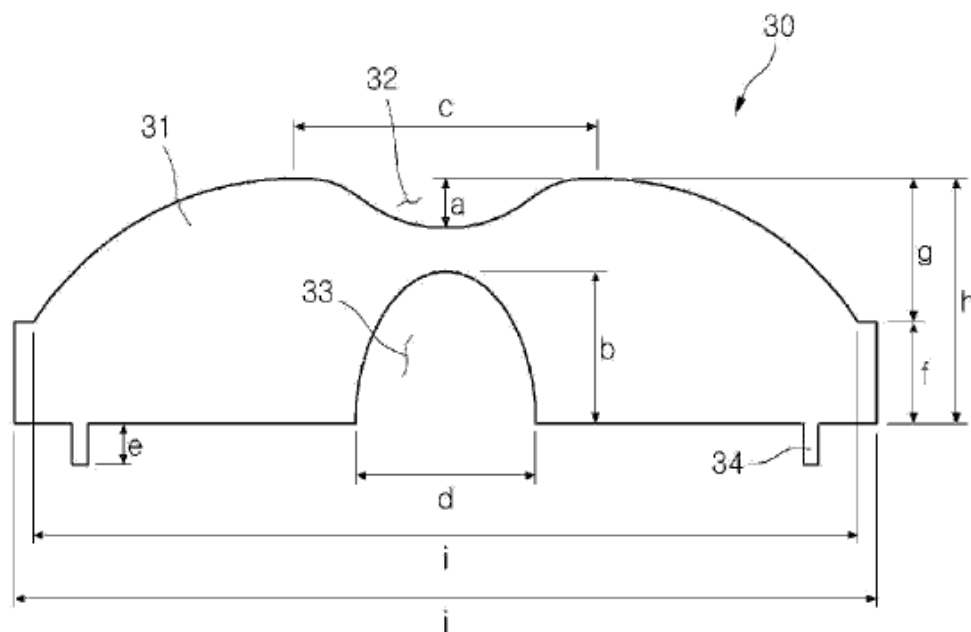

- Arrangements involving reflective surfaces only, at least one surface having optical power, and adapted for a single LED are classified in [G02B 19/0061](#) and in [G02B 19/0023](#).
- Arrangements involving reflective and refractive surfaces adapted for a single LED are classified in [G02B 19/0061](#) and in [G02B 19/0028](#). For example:

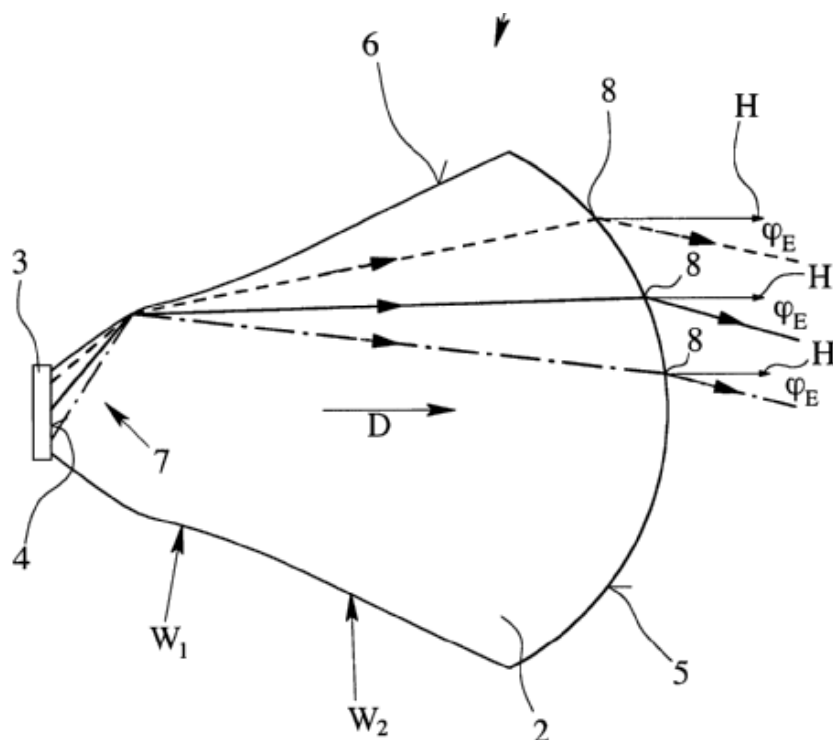

In the above examples, the classification [G02B 19/0071](#) is additionally given in the case of adaptation to illuminate a complete hemisphere or a plane extending 360° around the source. For example, the following arrangement would be classified in [G02B 19/0061](#), [G02B 19/0028](#) and [G02B 19/0071](#):

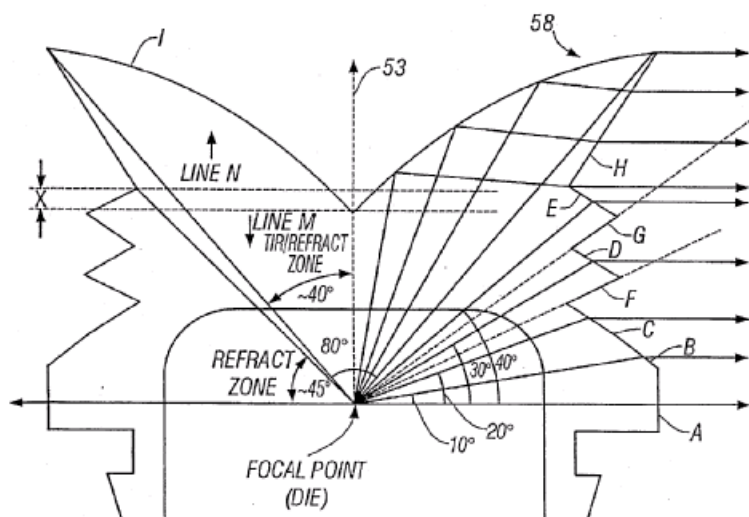

G02B 21/00

Microscopes (eyepieces [G02B 25/00](#); polarising systems [G02B 27/28](#); measuring microscopes [G01B 9/04](#); microtomes [G01N 1/06](#); scanning-probe techniques or apparatus [G01Q](#))

Definition statement

This place covers:

Optical microscopes including conventional microscopes, as well as laser scanning microscopes, confocal microscopes, fluorescence microscopes, video microscopes or optical aspects of surgical microscopes.

References

Limiting references

This place does not cover:

Eyepieces	G02B 25/00
Polarising systems	G02B 27/28
Ophthalmic microscopes	A61B 3/13
Measuring microscopes	G01B 9/04
Microtomes	G01N 1/06
Scanning probe microscopes (SPM), e.g. scanning tunnelling microscopes (STM), atomic force microscopes (AFM), scanning near-field optical microscopes (SNOM), magnetic force microscopes (MFM)	G01Q
Electron microscopes	H01J 37/00

Informative references

Attention is drawn to the following places, which may be of interest for search:

Medical aspects of surgical microscopes	A61B 90/36
---	----------------------------

Special rules of classification

Non-confocal fluorescence microscopes, including visible and infrared ones, are classified in [G02B 21/16](#)

G02B 23/00

Telescopes, e.g. binoculars; Periscopes; Instruments for viewing the inside of hollow bodies (diagnostic instruments [A61B](#)); Viewfinders (objectives [G02B 9/00](#), [G02B 13/00](#), [G02B 15/00](#), [G02B 17/00](#); eyepieces [G02B 25/00](#)); Optical aiming or sighting devices (non-optical aspects of weapon aiming or sighting devices [F41G](#))

Definition statement

This place covers:

- Telescopes, e.g. binoculars;
- Periscopes;
- Instruments for viewing the inside of hollow bodies e.g. endoscopes

References

Limiting references

This place does not cover:

Optical design aspects or layout of objectives	G02B 9/00 , G02B 13/00 , G02B 15/00 , G02B 17/00
Optical design aspects or layout of eyepieces	G02B 25/00
Medical diagnostic instruments in general	A61B
Endoscopes specifically for medical applications, e.g. structural aspects for the intended medical procedure	A61B 1/00
non-optical details of weapon aiming or sighting devices	F41G

G02B 25/00

Eyepieces; Magnifying glasses (simple lenses [G02B 3/00](#))

Definition statement

This place covers:

Eyepieces (e.g. for microscopes or telescopes); Magnifying glasses

References

Limiting references

This place does not cover:

Viewfinders for photographic apparatus	G03B 13/02
--	----------------------------

Informative references

Attention is drawn to the following places, which may be of interest for search:

Simple lenses	G02B 3/00
---------------	---------------------------

G02B 26/00

Optical devices or arrangements using movable or deformable optical elements for controlling the intensity, colour, phase, polarisation or direction of light, e.g. switching, gating, modulating (specially adapted to measuring characteristics of light [G01J](#); using devices or arrangements the optical operation of which is modified by changing the optical properties of the medium of the devices or the arrangements [G02F 1/00](#); control of light in general [G05D 25/00](#); control of light sources [H01S 3/10](#), [H05B 37/00](#) - [H05B 43/00](#); mechanically operable parts of lighting devices for the control of light [F21V](#))

Definition statement

This place covers:

Optical devices or arrangements using movable or deformable optical elements for controlling the intensity, colour, phase, polarisation or direction of light, e.g. switching, gating, modulating

Relationships with other classification places

Optical devices or arrangements the optical operation of which involves changing the optical properties of the material used by an applied field or force [G02F 1/00](#)

References

Limiting references

This place does not cover:

Mechanically operable parts of lighting devices	F21V
Measuring characteristic of light, spectroscopy	G01J
Active devices changing the optical properties of the medium	G02F
Control of light sources	H01S 3/10 , H05B 37/00 - H05B 43/00

Informative references

Attention is drawn to the following places, which may be of interest for search:

Control of light in general	G05D 25/00
-----------------------------	----------------------------

Glossary of terms

In this place, the following terms or expressions are used with the meaning indicated:

Gyricon	The term gyricon refers to a type of electronic paper in the form of a thin layer of transparent plastic in which millions of small "bichromal" beads (i.e. with hemispheres of two contrasting colors) are randomly dispersed. When a voltage is applied, the beads rotate to present one colored side to the viewer, allowing images such as text and pictures to be displayed.
---------	---

G02B 26/001

{based on interference in an adjustable optical cavity (interference filters [G02B 5/28](#); devices or arrangements using multiple reflections in spectrometry or monochromators [G01J 3/26](#))}

Definition statement

This place covers:

Systems providing spectral filtering by an adjustable, e.g. variable spacing, optical cavity.

Relationships with other classification places

Adjustable Fabry-Perot devices in spectroscopy applications, e.g. as monochromators or for spectral analysis are classified in [G01J 3/26](#). A further classification in [G02B 26/001](#) is optional.

References

Limiting references

This place does not cover:

Non adjustable interference filters	G02B 5/28
-------------------------------------	---------------------------

Devices or arrangements using multiple reflections in spectrometry or monochromators	G01J 3/26
--	---------------------------


G02B 26/026

{based on the rotation of particles under the influence of an external field, e.g. gyricons, twisting ball displays (based on orientable dipolar particles [G02F 1/172](#); based on electrophoresis [G02F 1/167](#))}

Definition statement

This place covers:

All documents describing rotating particle displays ("gyricons" etc.) are to be classified in [G02B 26/026](#), for example:

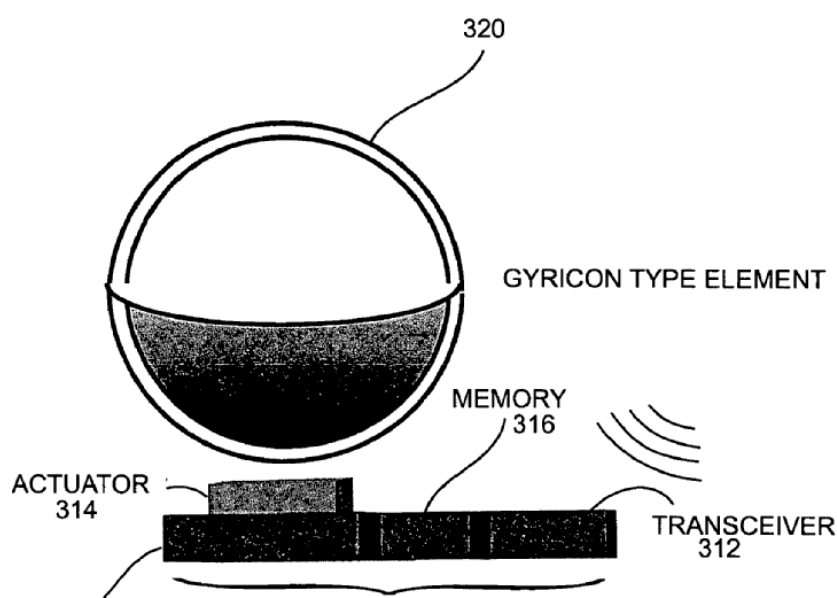

However, electrophoretic displays (involving particles moving linearly under the influence of an electric field) are classified in [G02F 1/167](#).

Control of the intensity of light based on variable absorption of orientable dipolar particles is classified in [G02F 1/172](#).

References

Limiting references

This place does not cover:

Displays based on electrophoresis	G02F 1/167
Displays based on orientable dipolar particles	G02F 1/172

G02B 26/0833

{the reflecting element being a micromechanical device, e.g. a MEMS mirror, DMD ([G02B 26/0825](#) takes precedence; micromechanical devices in general [B81B](#))}

Definition statement

This place covers:

[G02B 26/0833](#) is directed to optical MEMS per se with a high emphasis on the optical properties of the devices and their interaction with other optical elements in the apparatus.

References

Limiting references

This place does not cover:

Deformable or flexible reflecting membrane devices	G02B 26/0825
--	------------------------------

Informative references

Attention is drawn to the following places, which may be of interest for search:

Micromechanical devices in general	B81B
------------------------------------	----------------------

Synonyms and Keywords

In patent documents, the following abbreviations are often used:

DLP	Digital Light Processing
DMD	Digital Micromirror System
MEMS	Micro Electrical Mechanical System
MOEMS	Micro Optical Electro Mechanical System

G02B 27/00

Other optical systems; Other optical apparatus (means for bringing about special optical effects in shop-windows, show-cases [A47F](#), e.g. [A47F 11/06](#); optical toys [A63H 33/22](#); designs or pictures characterised by special light effects [B44F 1/00](#))

Definition statement

This place covers:

Other optical systems, for example, head-up displays, head-mounted displays, beam-shaping systems, beam-splitting or combining systems, systems for producing stereoscopic or three-dimensional effects, polarising systems, diffraction systems.

References

Limiting references

This place does not cover:

Showcases	A47F
-----------	----------------------

Optical toys	A63H 33/22
designs or pictures characterized by special light effects	B44F 1/00

Special rules of classification

Further details of other subgroups of [G02B 27/00](#), like [G02B 27/10](#) through [G02B 27/44](#) see below after the definition of [G02B 27/01](#). Note: the format is not yet the final format and remains to be dealt with by editorial board. It is noted that the definition of [G02B 27/22](#) was already available in the earlier version of this current document.

The following IPC subclass is not used for classification [G02B 27/18](#), see the relevant subclasses according to the projector type. The subclass [G02B 27/20](#) is however used for laser pointers or the like.

G02B 27/01

Head-up displays

Definition statement

This place covers:


Devices for superimposing a synthetic image on a background scene by projection of a synthetic image on a background scene on a partially transparent surface:

- head mounted, e.g. pilot helmets
- non head mounted, e.g. windscreen of a car
- optical features
- mechanical features
- display position adjusting means not related to the information which is to be displayed
- sight systems

Examples of subject matter covered are:

Projection of flight or drive data on the windscreen of a plane or of a car (see for example US2011298693 paragraphs [0022],[0023], figure 1).

Vizor of pilots helmet with a partially transparent surface ("helmet mounted displays")

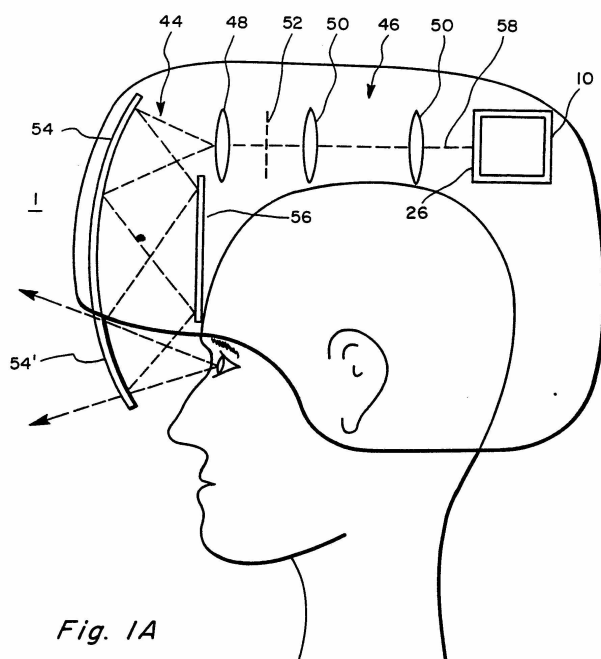

Special rules of classification

Further details covered by [G02B 27/01](#) and not provided for in any of its subgroups is provided for in the subgroups of Indexing Codes [G02B 27/01](#) and below. Classification is obligatory.

Further details of other subgroups of [G02B 27/00](#)

[G02B 27/10](#): Beam splitting or combining systems

The scheme comprises subgroups covering specific structural technical solutions ("means") and a parallel set of subgroups covering the purposes of the devices, independently of the specific type of beamsplitter used.

The subgroup [G02B 27/10](#) is intended for beamsplitting/combining systems which cannot be given any lower means subgroup in the scheme. In general, documents should be assigned at least one means subgroup and at least one purpose subgroup.

Purpose Subgroups: Examples



[G02B 27/1006](#) for splitting or combining different wavelengths

For wavelength specific documents which are not covered by any lower entry.

All color imaging related documents are in the color sensing subgroup ([G02B 27/1013](#)) or in one of the color reproducing subgroups ([G02B 27/102](#) and subgroups). These subgroups are not limited to RGB devices and cover also non visible or pseudocolor devices as long as the final image is intended for the human viewer.

[G02B 27/1013](#)

For color or multispectral image sensors, e.g. splitting an image into monochromatic image components on respective sensors.

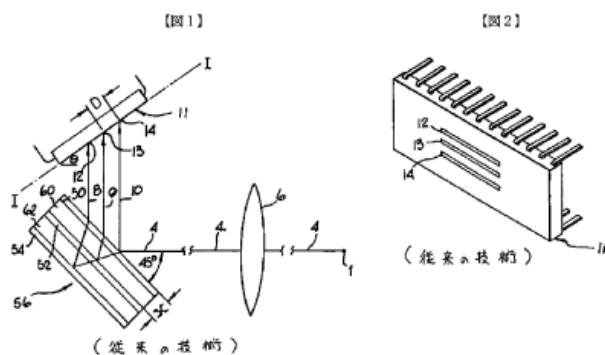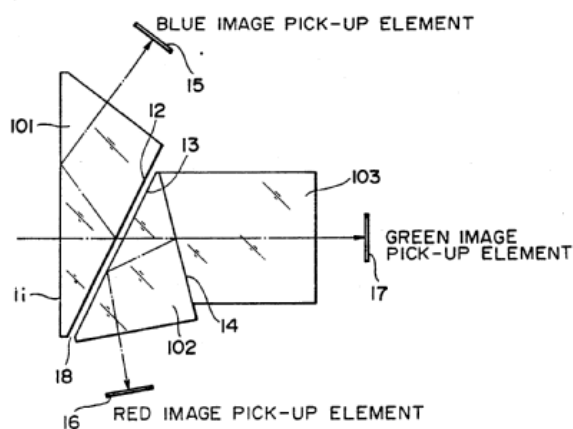

The devices must be imaging devices, including line scanning. Other spectral sensing devices belong to [G02B 27/1006](#).

[G02B 27/102](#)


For generating a color image from monochromatic image signal sources.

Essentially covers color generating systems not specifically designed for a particular type of SLM, e.g. illumination systems combining multiple light sources


[G02B 27/1026](#)

For use with reflective spatial light modulators

WO0038432

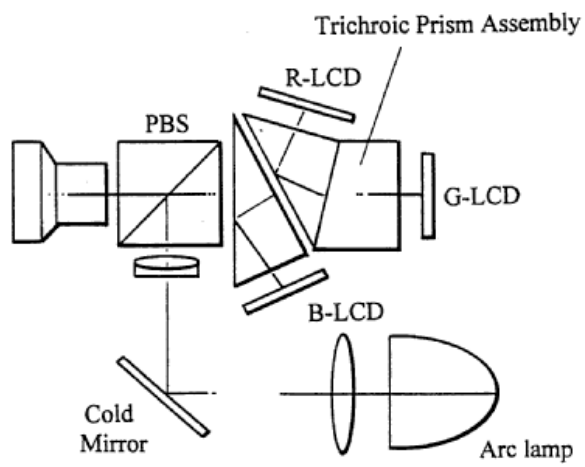

US2001000973

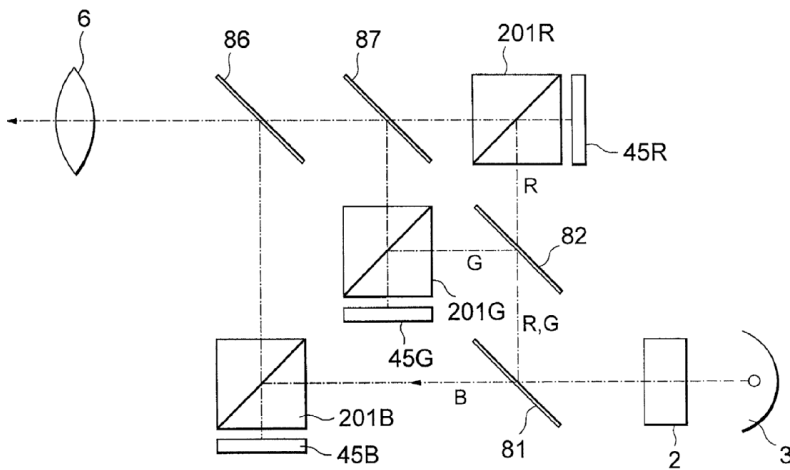[G02B 27/1033](#)

Having a single light modulator for all colour channels


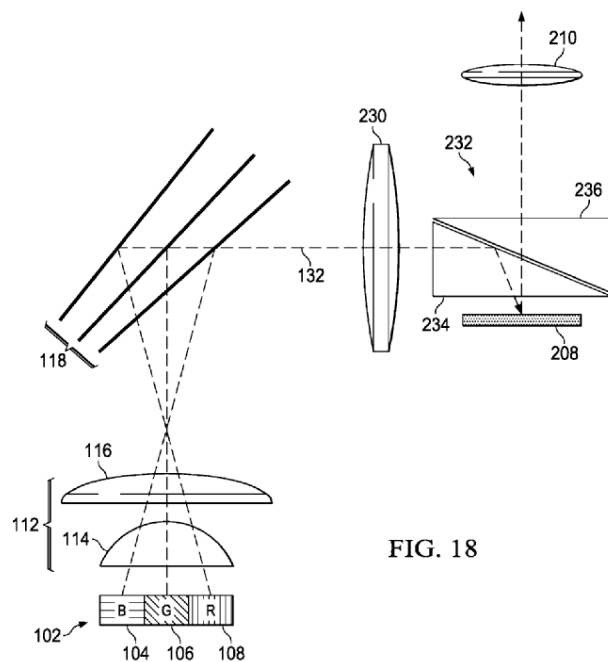


FIG. 18

[G02B 27/104](#)

For use with scanning systems


Beams splitter/combiner arrangement for color scanning display arrangements

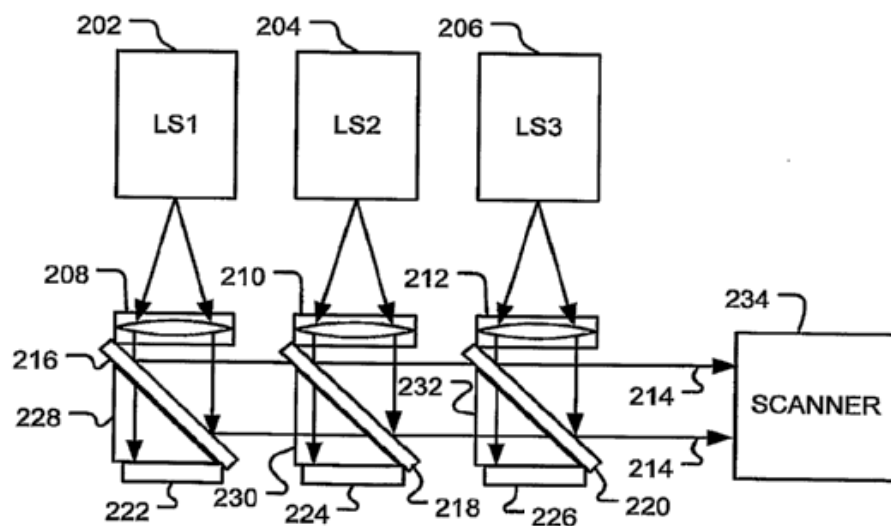

[G02B 27/1046](#)

For use with transmissive spatial light modulators


The "classic" 3 LCD projector;

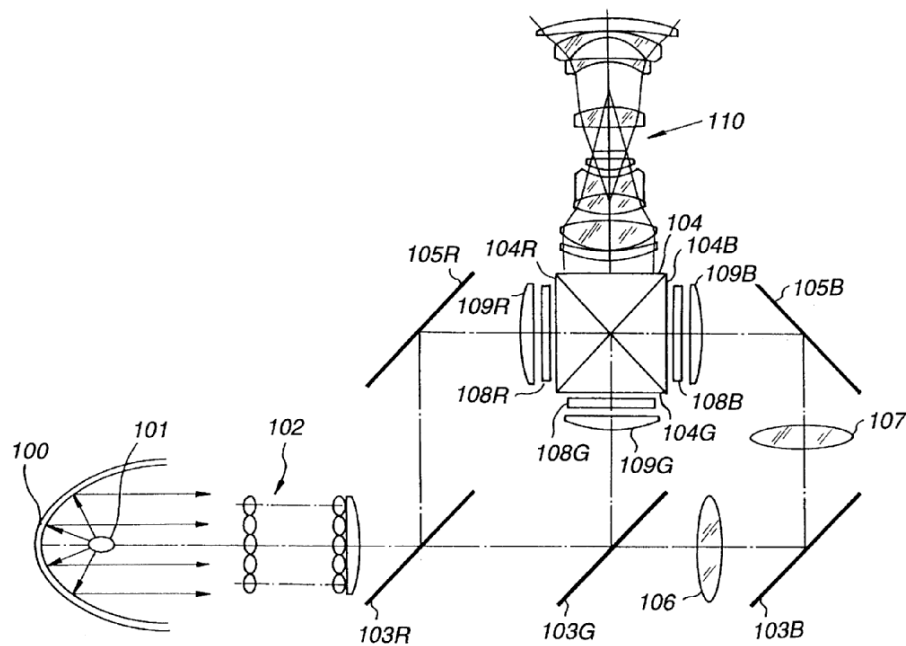


[G02B 27/1053](#)

Using a single light modulator for all colour channels

for example time sequential led sources used with a single SLM, US2006196944

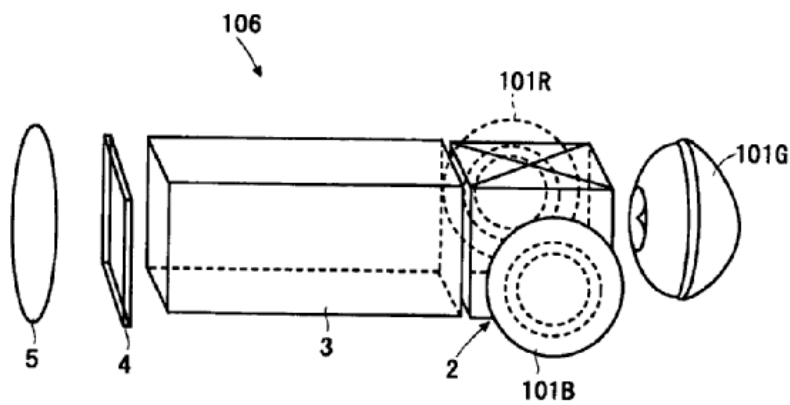

could be extended to light pipes: EP1003064

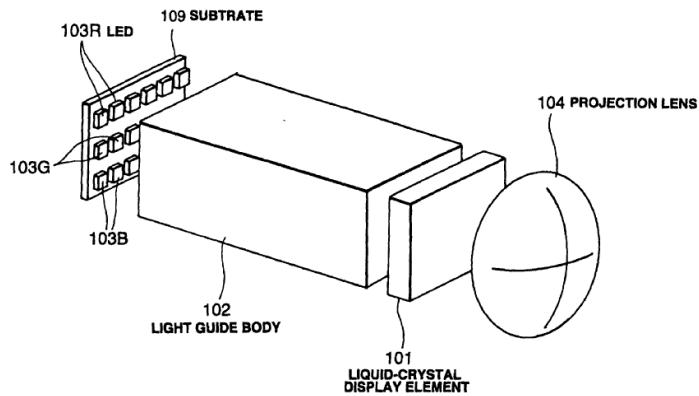


[G02B 27/106](#)


For splitting or combining a plurality of identical beams or images, e.g. image replication.

Quite a few documents deal with obtaining multiple identical copies of a beam. The numbers of beam should be four or more, color aspects are not relevant for this class.

US2006082890: construction laser

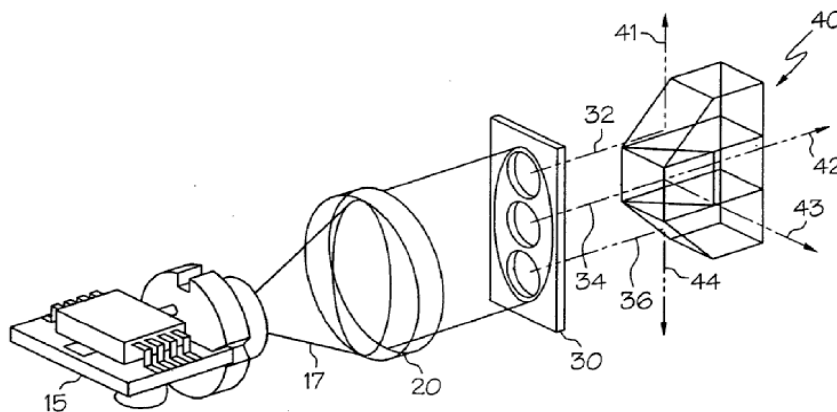

DE3502382: Laser beam replication.

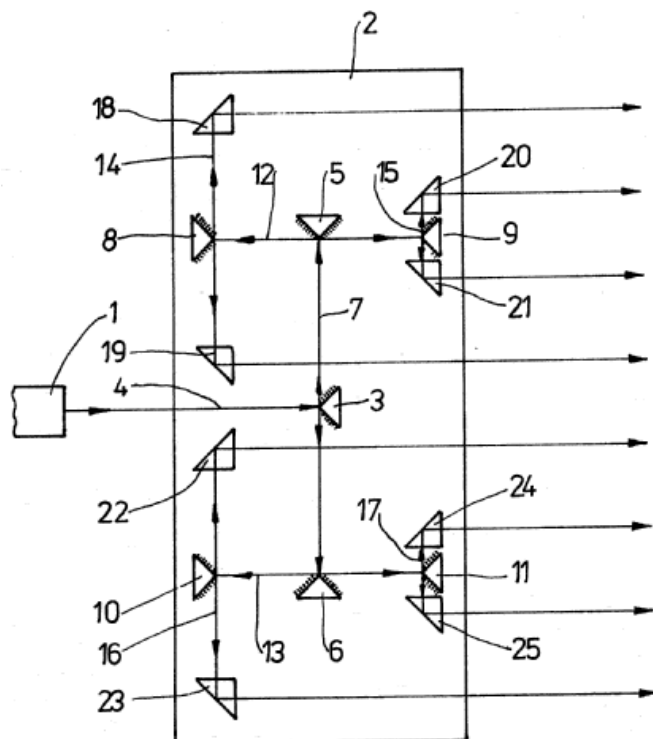[G02B 27/1073](#)

Characterized by manufacturing or alignment methods, e.g. assembly of cross dichroic cubes.


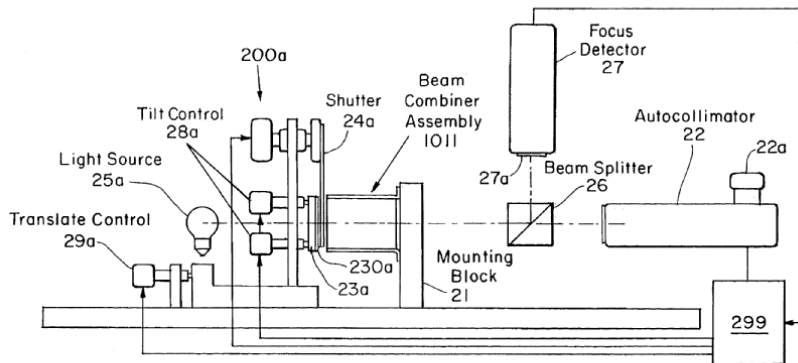


FIG. 3B

US5455678

EP 0 947 869 A2

FIG. 1

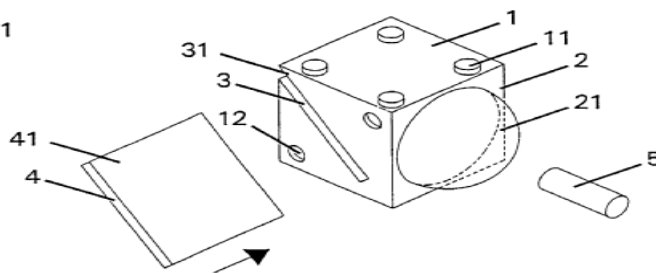

EP0947869

The subgroup is also relevant for mechanical aspects and devices where the alignment of the beams requires a particular construction (equivalent to [G02B 7/00](#) for beamsplitters).


[G02B 27/1066](#)

For enhancing image performance, e.g. resolution, pixel numbers, dual magnifications or dynamic range, by tiling, slicing or overlapping fields of view. Covers sensing or imaging devices where fields are either


- overlapping, e.g. dual resolution or pixel shifted systems, to increase the perceived resolution or
- abutted, save some border blending, for dividing or combining a larger field of view into or from subfields, e.g. detector or display tiling, image slicing.

Resolution should be taken in a broad sense, including high dynamic range systems.


GB2222892: high resolution CRT with a low resolution LCD

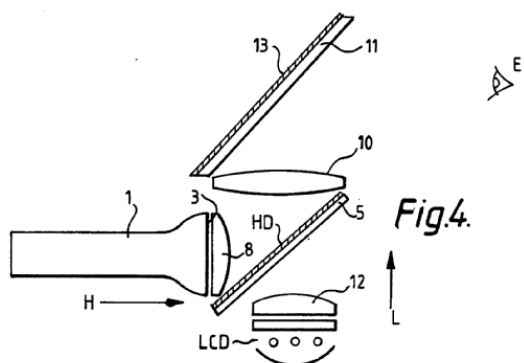


WO2008129552: "foveal" devices, narrow HD field with a large low resolution field

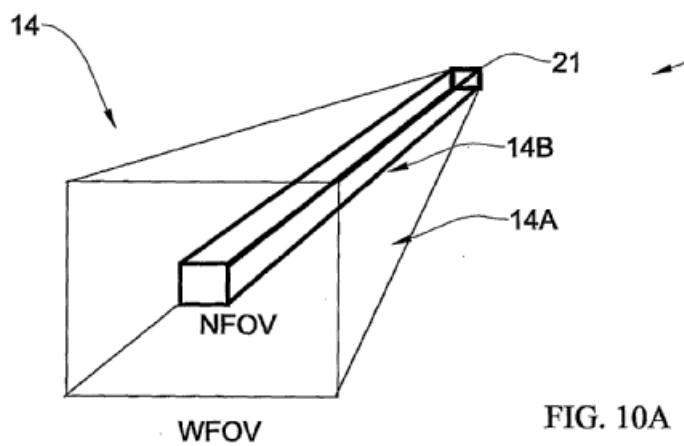

WO98/10402: mosaic displays

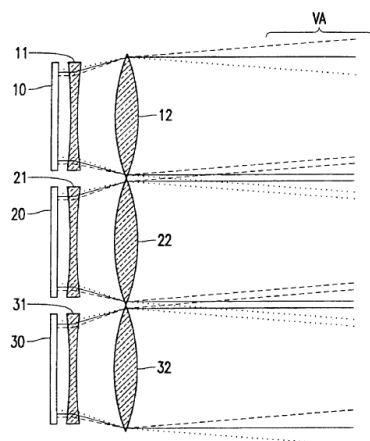


CA1073715: Slicing/dividing an image

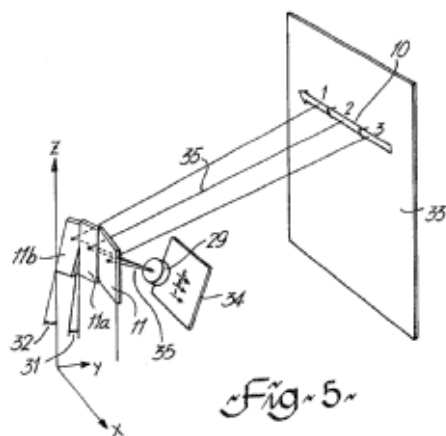
[G02B 27/108](#)

For sampling a portion of a beam or combining a small beam in a larger one, e.g. wherein the area ratio or power ratio of the divided beams significantly differs from unity, without spectral selectivity. Sampling devices for high power laser, laser beam insertion.

US4746205

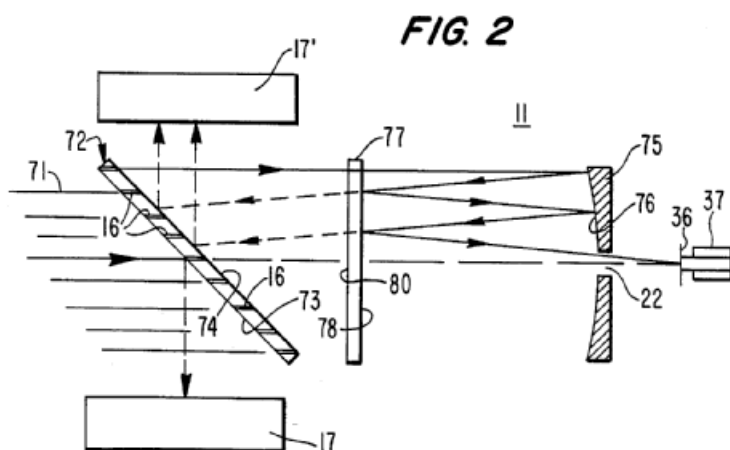


GB2027222

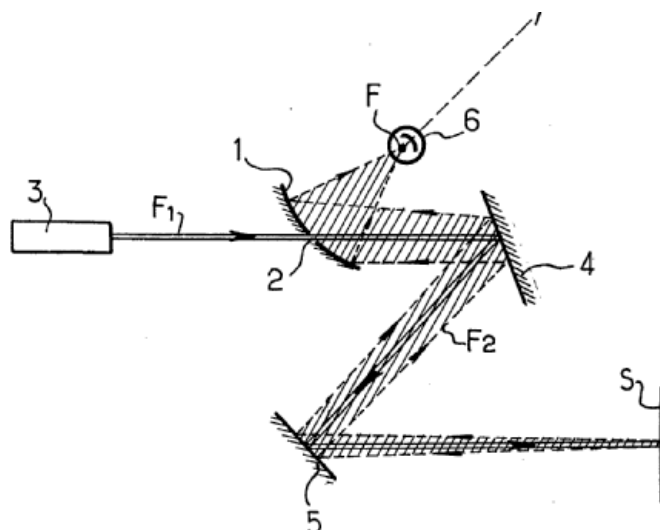

Means Subgroups: Examples

The decisive criterion is the physical principle leading to the splitting or combining, and not other aspects of the device. For example a cube beamsplitting prism operates by reflecting (part of) the beam, and hence operates by reflection, even though it also has refracting surfaces. Following the optical path, the relevant surface marks the boundary between the single beam and the multiple beams.

IPC classes [G02B 27/12](#) and [G02B 27/14](#) refer to "refraction only" or "reflection only" but some devices use both reflecting and refracting beamsplitting structure, e.g. US6400512 :

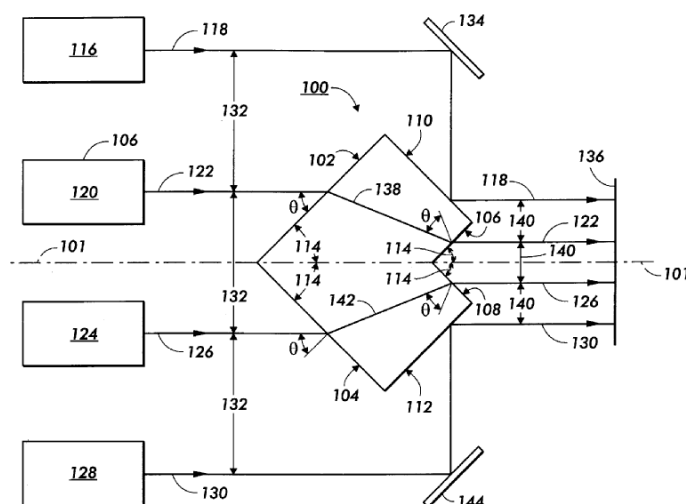

Applying strictly the IPC wording of the headers [G02B 27/12](#) or [G02B 27/14](#), such documents would not have their details classified in these subgroups. For the purpose of CPC classification, the limitation "only" should be disregarded. The above document would therefore be classified in [G02B 27/12](#) (or a subgroup thereof) and [G02B 27/14](#) (or a subgroup thereof).

[G02B 27/1086](#)

Operating by diffraction only

Polychromatic diffractive combiners may be additionally classified in [G02B 27/1013](#) or [G02B 27/102](#).


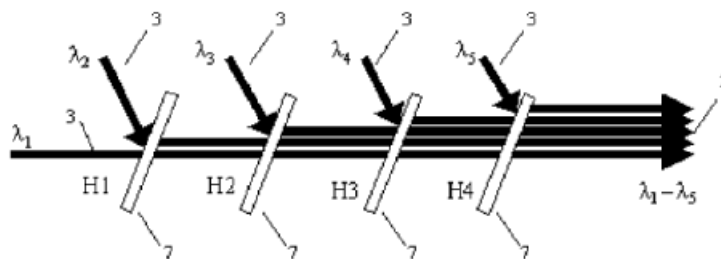


FIG. 3 Combining using several single-grating Holograms

US2006109876

[G02B 27/1093](#)

For use with monochromatic radiation only, e.g. devices for splitting a single laser source

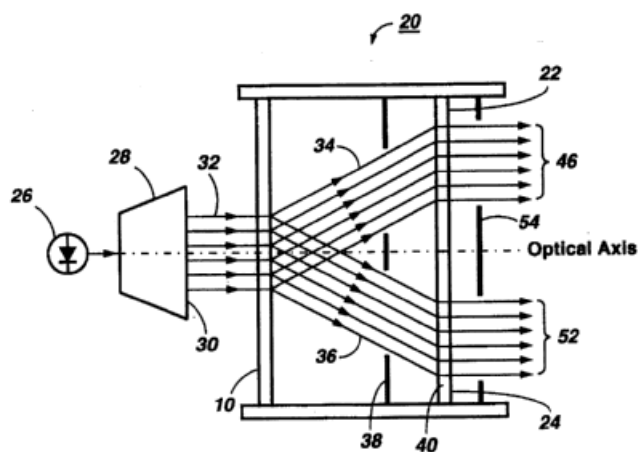

Since diffractive elements are intrinsically wavelength dependent, purely monochromatic devices represent special applications. [G02B 27/1086](#) and [G02B 27/1093](#) cover passive diffractive devices only

[G02B 27/12](#)

Operating by refraction only.


This subgroup comprises inter alia systems using birefringent materials for standard beamsplitting applications, for example not polarization relevant (polarization beamsplitters [G02B 27/283](#)).

[G02B 27/123](#)

The splitting element being a lens or a system of lenses, including arrays and surfaces with refractive power.

FR2889746: beam splitting takes place at 110a,110b

100

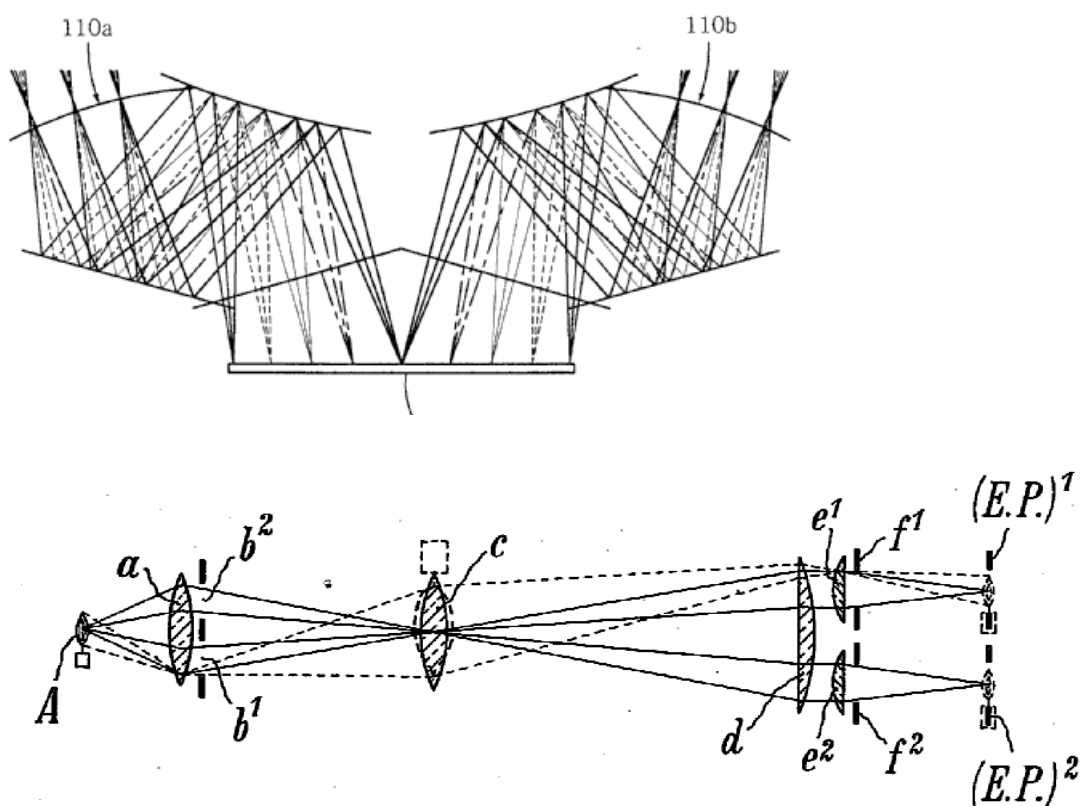

In [G02B 27/123](#) the optical path should be branched. Fly eye beam shaping devices belong to [G02B 27/0961](#), lens arrays per se in [G02B 3/0006](#).

[G02B 27/126](#)

The splitting element being a prism or prismatic array, including systems based on total internal reflection.

The class covers both refracting deviating prisms, including spectral deviation and systems where the splitting/combining is achieved by total internal reflection without reflecting coatings:

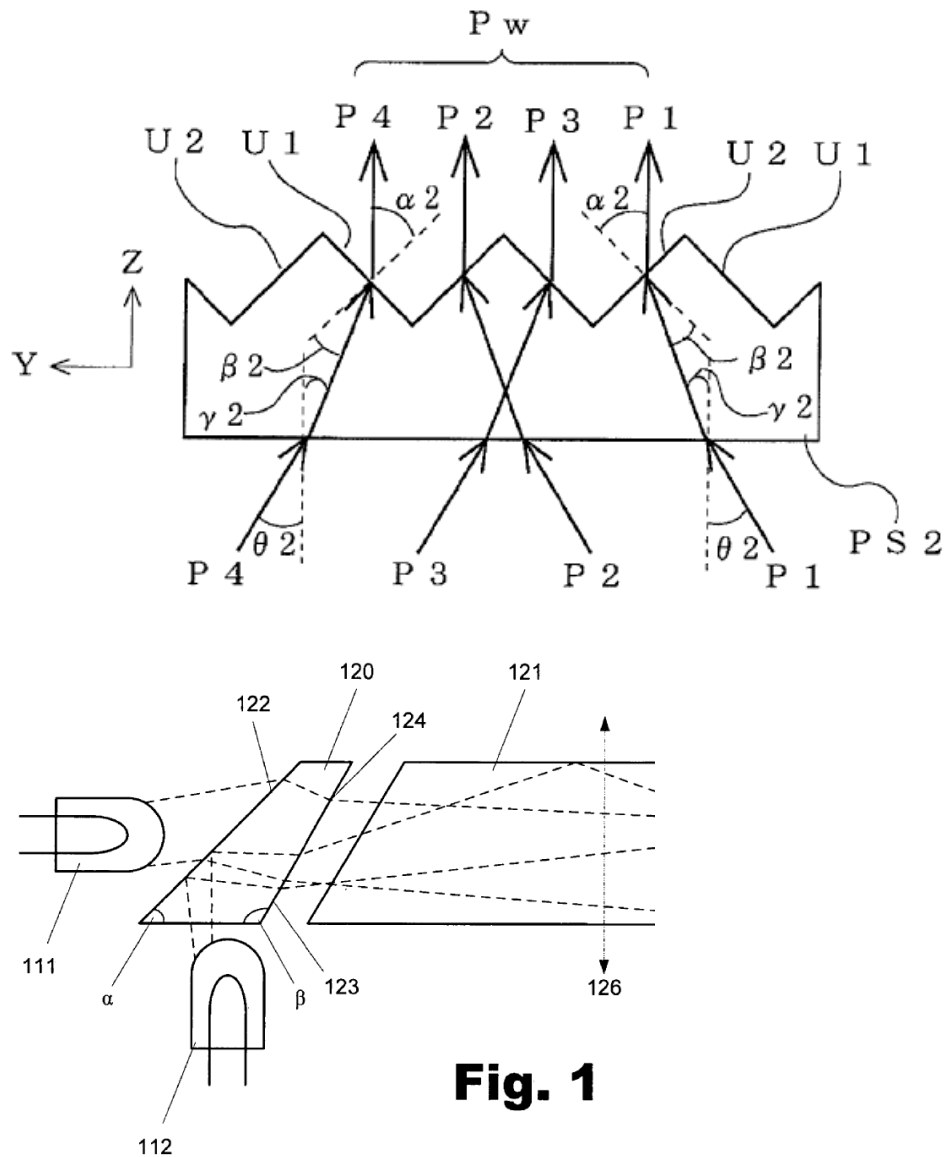



Fig. 1

US2005174658

[G02B 27/14](#)

Operating by reflection only

For example a non conventional reflective beamsplitter as in US6266359:

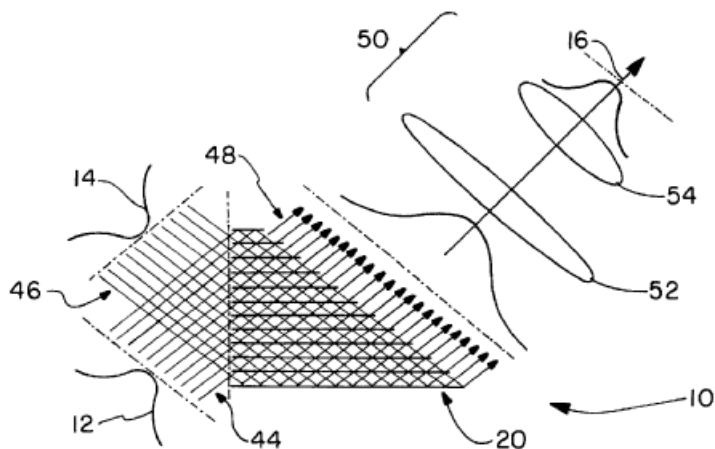

[G02B 27/141](#)

Using dichroic mirrors




For simple dichroic mirror arrangements transmitting a wavelength band and reflecting the other.

[G02B 27/1006](#) covers color splitting in general, and RGB image analysis or synthesis is covered by [G02B 27/1013](#) or [G02B 27/102](#) and lower.

[G02B 27/142](#)

Coating structure, e.g. thin films multilayers.

When the focus is the structure of the beam splitter coatings (thicknesses, materials, refractive indexes) including single thin metallic layers.

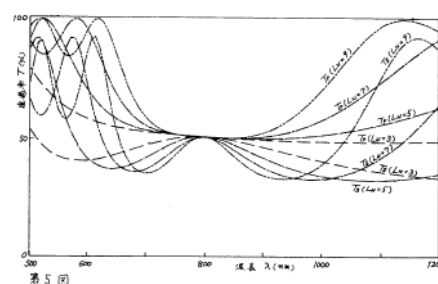


JP58208701: a polarisation independent multilayer semi-transparent coating.

[G02B 27/143](#)

Macroscopically faceted or segmented reflective surfaces

U.S. Patent

4,087,162

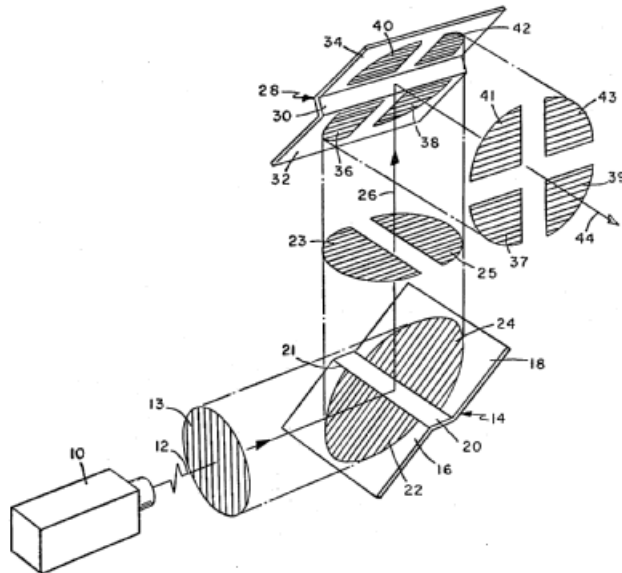


The segmentation here is macroscopic, compare with [G02B 27/147](#).

[G02B 27/144](#)

Using partially transparent surfaces without spectral selectivity ([G02B 27/147](#) takes precedence) for conventional half-mirrors.


US5198930:

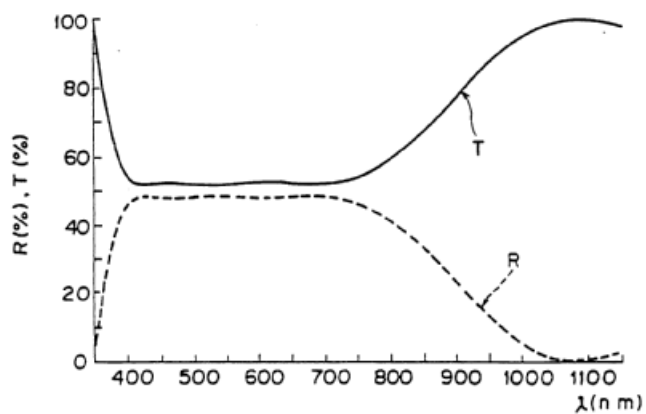

[G02B 27/145](#)


Having sequential partially reflecting surfaces

GB2153546

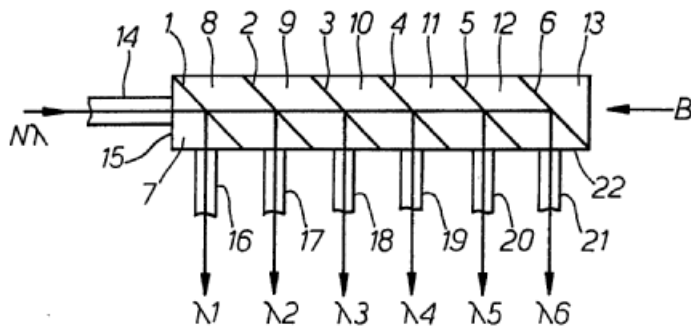[G02B 27/146](#)


With a tree or branched structure

EP1626585

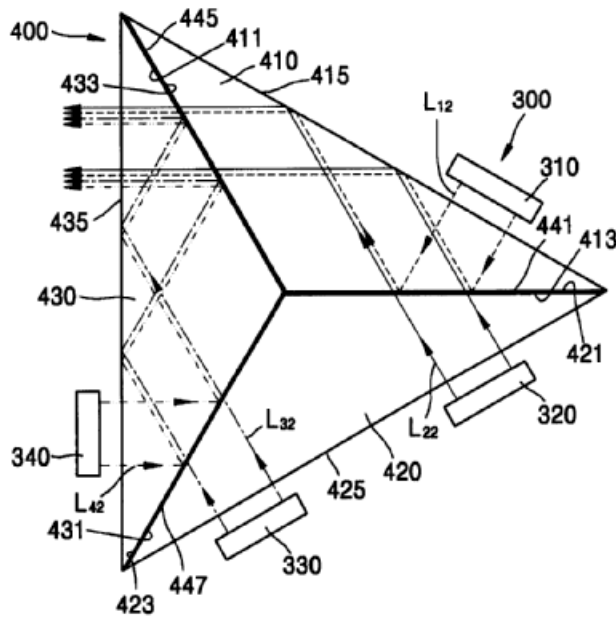[G02B 27/147](#)


Using averaging effects by spatially variable reflectivity on a microscopic level, e.g. polka dots, chequered or discontinuous patterns, or rapidly moving surfaces ([G02B 27/1086](#) takes precedence).

US4941012

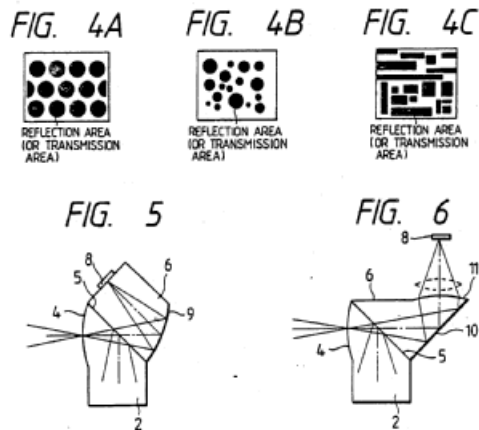


The subgroup also covers time averaging systems such as chopper mirrors rotating at high speed to emulate a beamsplitter.

JP52011894:

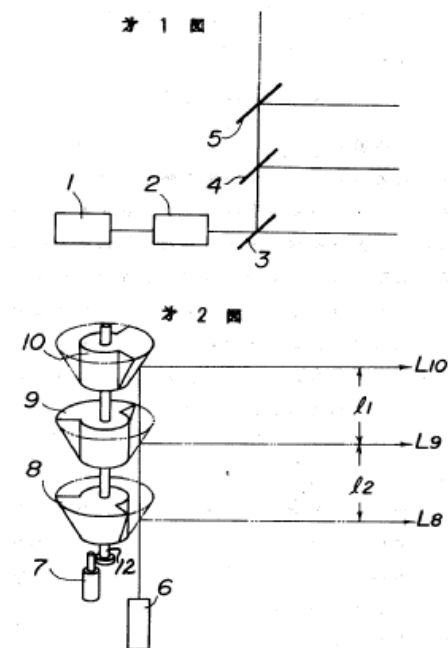
[G02B 27/149](#)

Devices incorporating crossed beamsplitting surfaces, e.g. cross-dichroic cubes or X-cubes. Not limited to three channels

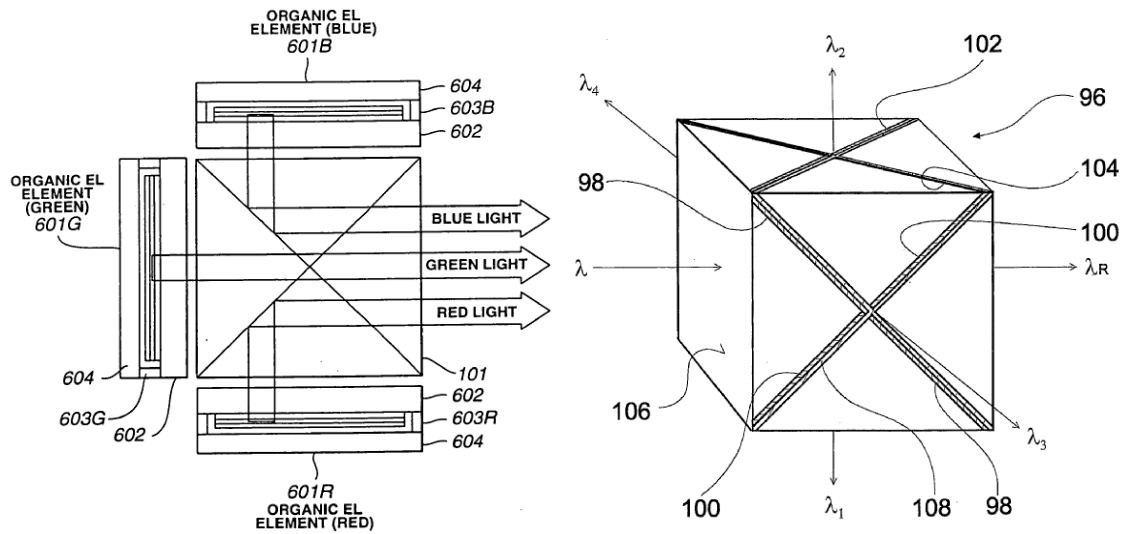


[G02B 27/148](#)

Including stacked surfaces having at least one double-pass partially reflecting surface

A special type but common type of beamsplitter where at least the front surface is crossed twice. Common for RGB angular separation, the last surface can be fully reflective.

US2009251783

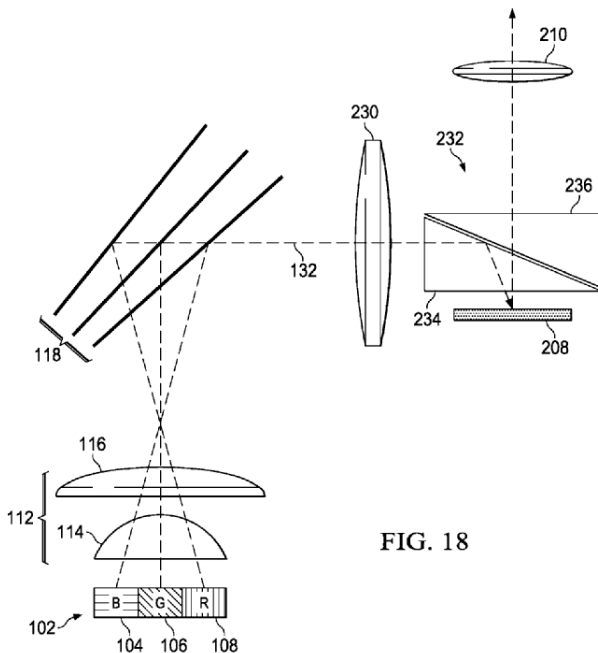

[G02B 27/16](#)

Used as aids for focusing

Covers split prisms historically used to focus an image in reflex cameras and has almost no activity.

[G02B 27/22](#)

There are two groups for autostereoscopic systems (i.e. systems in which left and right images projected to the left and right eyes of an observer who is not required to view the images through special glasses optical systems placed adjacent to the eyes:

Autostereoscopic systems which comprise lenticular arrays or parallax barriers are classified in [G02B 27/2214](#).

Autostereoscopic displays which do not comprise lenticular arrays or parallax barriers, for example systems in which the left and right images are projected directly into the left and right eyes of the observer, are classified in [G02B 27/225](#). An example of such a display is shown in the figure below


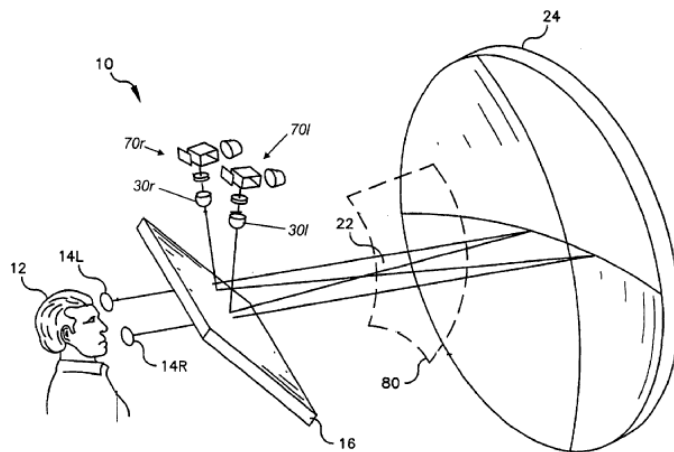


FIG. 1
(PRIOR ART)

G02B 27/2271


Concerns volumetric displays, i.e. in which an image is built up from image elements distributed over a three-dimensional volume. An example is US2007/0242324, in which visible fluorescence is excited at the crossing points of two scanned invisible lasers:

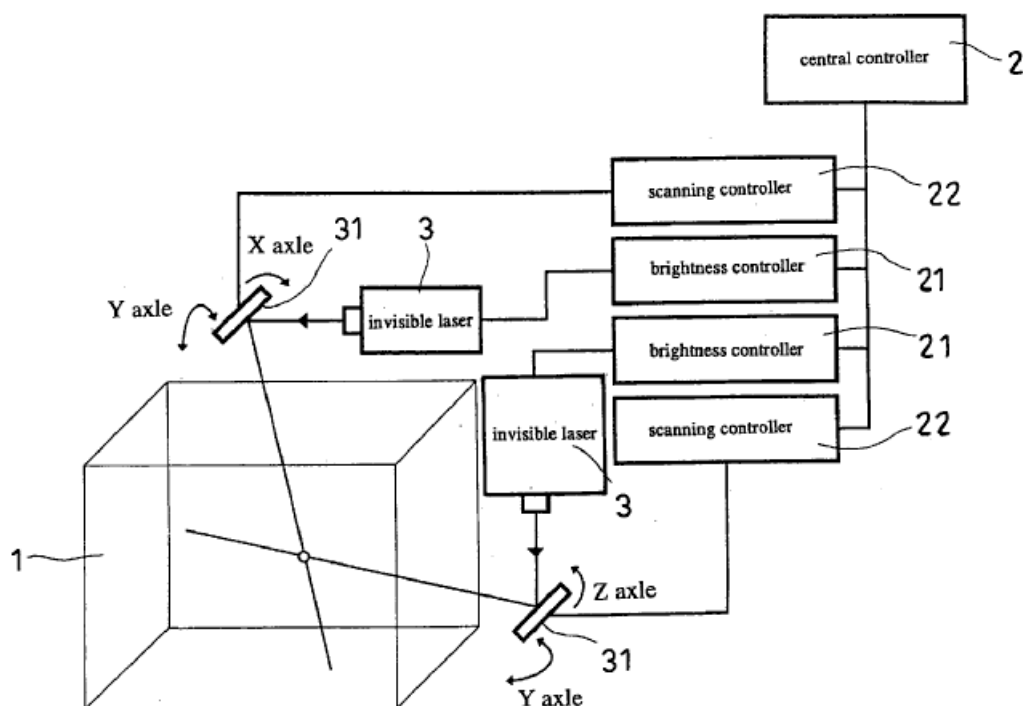

There are three subgroups:


[G02B 27/2278](#)

The image being built up using a stack of two dimensional planes, e.g. US 2002/0130820:

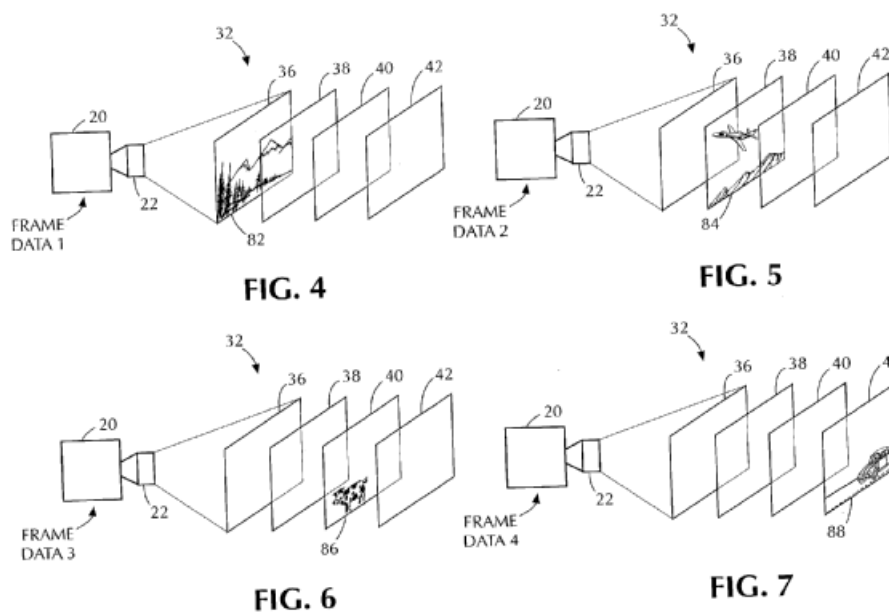

[G02B 27/2285](#)


The volume being generated by a moving (vibrating or rotating) surface, e.g. US6115006:

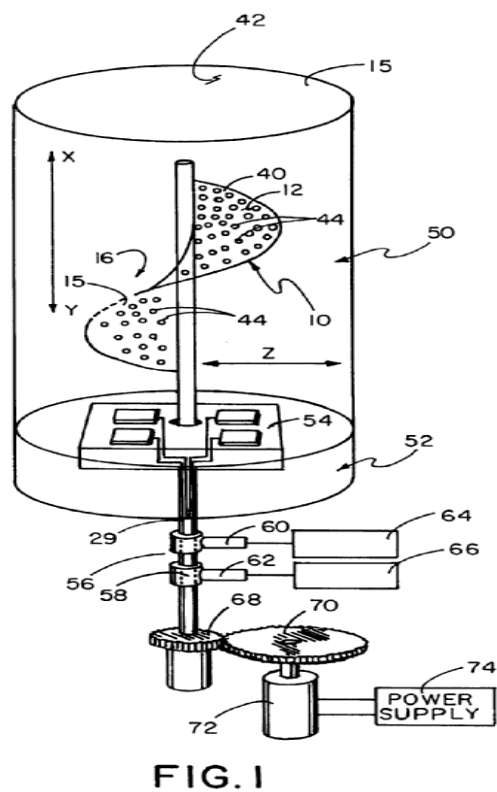


[G02B 27/2292](#)

Projecting an aerial or floating image, typical examples of which would be WO2/061492:

FIG.1

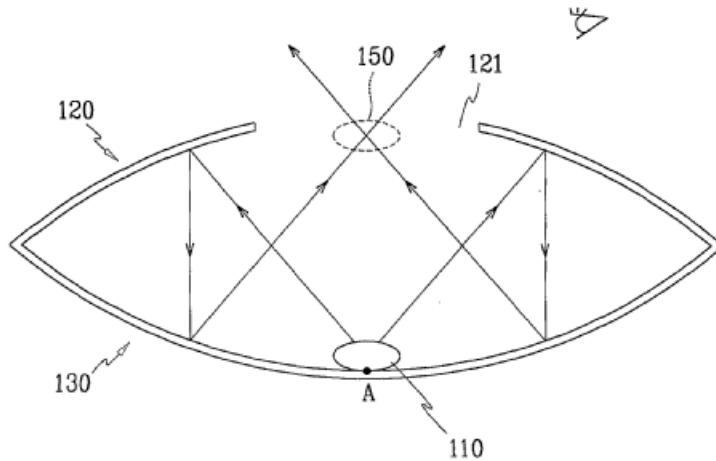

or WO95/19584

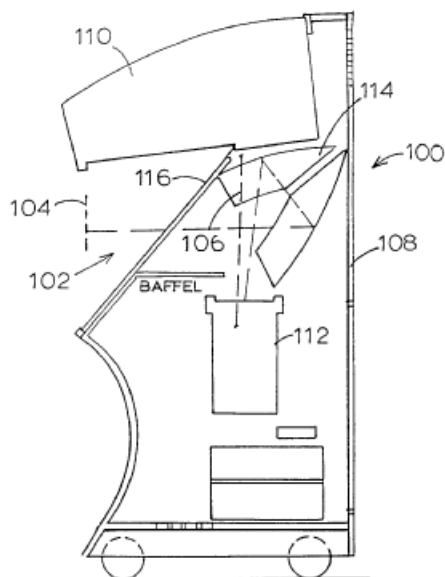

[G02B 27/42](#): Diffraction optics

[G02B 27/42](#) deals with systems comprising a DOE (diffractive optical element) having a significant interaction with another component of the optical system. If the document also discloses significant details about the diffractive element as such, it should be additionally classified in [G02B 5/18](#). This subgroup contains documents in which the diffractive effect results from a purposeful design of a DOE. It does NOT include documents in which light is merely diffracted by an aperture, an edge or a particle. [G02B 27/4266](#) is an exception to this rule. [G02B 27/42](#) is essentially structured into two major groups:

.. imaging systems ([G02B 27/4205](#) and lower)

.. non-imaging systems ([G02B 27/4233](#) and lower).

Besides this major differentiation, there are three further divisions:

.. physical properties of the DOE:

polarization [G02B 27/4261](#),

thermal [G02B 27/4283](#),

spectral [G02B 27/4288](#), [G02B 27/4294](#)

.. sequential DOEs [G02B 27/4272](#) and [G02B 27/4277](#)

.. theory, models [G02B 27/4266](#)

In deciding whether a system is an imaging system or a non-imaging system, concepts such as image resolution or extended objects/images are strong hints towards imaging systems. On-axis point-like objects/images are pointers to non-imaging systems. It is important to note that [G02B 27/4205](#) (and lower) and [G02B 27/4233](#) (and lower) relate to the specific role played by the DOE in the system: a DOE within an imaging system, but merely deviating light for illumination purposes in a subsystem of the imaging system, is classified in [G02B 27/4233](#) (or lower).

Specific rules

[G02B 27/4233](#) (and lower) should preferably not contain documents which have a more specific class e.g. [G02B 6/00](#) (optical fibers, waveguides), [H01S](#) (laser pulse compression), [G01J](#) (spectroscopy).

[G02B 27/4238](#) should contain no document from the field of optical pick-up devices (these documents should be classified in [G11B 7/1353](#)).

[G02B 27/425](#) should preferably contain no document about mask illumination in a lithographic apparatus (these documents should be classified in [G03F 7/70158](#)). This should not be confused with a DOE projecting an image of the mask onto a wafer, which is classified in [G02B 27/4222](#).

[G02B 27/4272](#) and [G02B 27/4277](#) relate to plural diffractive elements positioned sequentially along the optical path means that the distance between sequential diffractive elements is large enough to ensure that each period of the subsequent grating receives diffracted light from several periods of the previous grating, i.e. far-field diffraction. For instance, DOEs which, at least in certain portions of the DOE are in direct contact or multilayered DOEs are normally not plural diffractive elements in the sense of [G02B 27/4272](#) and [G02B 27/4277](#).

When allocating [G02B 27/42](#), consider also the relevance of the following classes in [G02B](#) relating to diffraction or gratings:

[G02B 1/005](#) (photonic crystals)

[G02B 1/118](#) (moth-eye anti-reflection structures)

[G02B 5/0252](#) (diffusers using holographic or diffractive means)

[G02B 5/18](#) (diffraction gratings per se)

[G02B 5/203](#) (filters using holographic or diffractive means)

[G02B 5/32](#) (holographic optical elements)

[G02B 26/0808](#) (controlling direction of light)

[G02B 26/106](#) (scanners using movable diffraction gratings)

[G02B 27/0944](#) (beam shaping using diffractive optical elements)

[G02B 27/1086](#) (beam splitting and combining by diffraction)

[G02B 27/46](#) (spatial filters)

[G02B 27/58](#) (superresolution, apodization)

[G02B 27/60](#) (systems using moiré fringes)

Exemplary drawings for [G02B 27/42](#)

Diffraction optics, i.e. systems including a diffractive element being designed for providing a diffractive effect ([G02B 27/60](#) takes precedence)

[G02B 27/4205](#)

having a diffractive optical element [DOE] contributing to image formation, e.g. whereby modulation transfer function MTF or optical


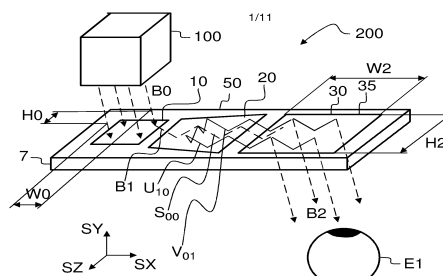


Fig 1

aberrations are relevant

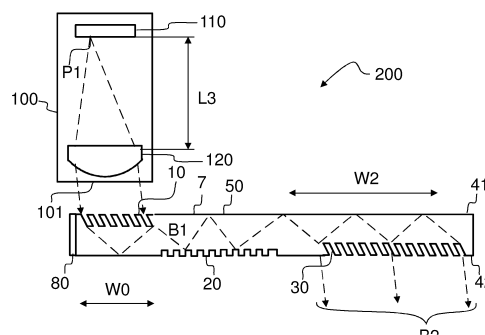


e.g. WO2008081070:

microdisplay (110) projected by diffractive beam expander (50)


[G02B 27/4211](#)

correcting chromatic aberrations ([G02B 27/0056](#), [G02B 27/4222](#),

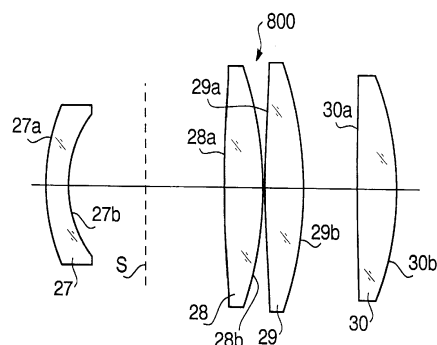

[G02B 27/4227](#) take precedence)

FIG. 21A FIG. 21B F

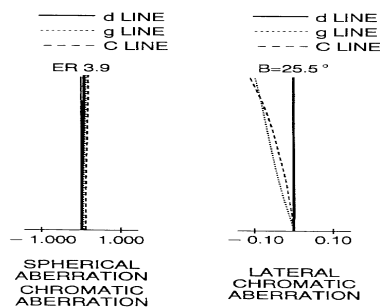

e.g. US6130785: eyepiece (800)

with diffractive surfaces (28b, 29b)

G02B 27/4216

correcting geometrical aberrations

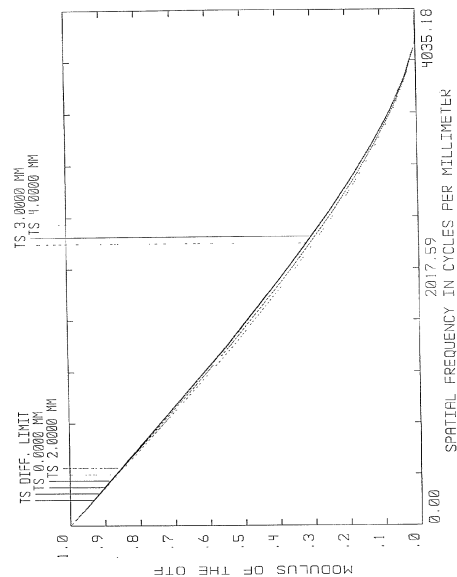


Fig. 25B

e.g. US2002027712: L6 comprises DOE; monochromatic aberrations are smaller than compared to a solution without DOE; fig 25B shows polychromatic MTF




Fig. 24

[G02B 27/4222](#)

in projection exposure systems, e.g. photolithographic systems

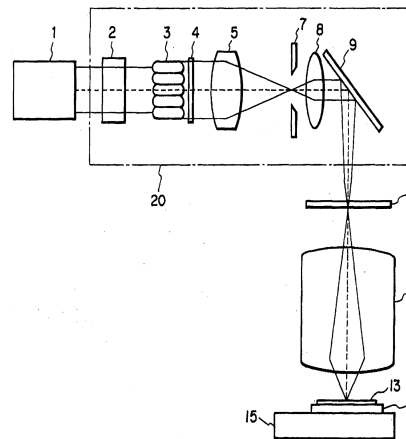


FIG. 1




FIG. 2







FIG. 3B

e.g. EP1022589: projection system (12)
including DOE (21), illumination system (20), reticle (11)

[G02B 27/4227](#)

in image scanning systems

FIG. 4

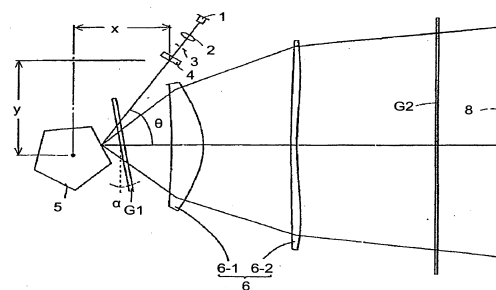


e.g. US2007211324: at

least one of the lenses (2, 4, 6, 8) includes a DOE

[G02B 27/4233](#)


having a diffractive element [DOE] contributing to a non-imaging application (diffusers having a diffractive element [G02B 5/0252](#); filters having a diffractive element [G02B 5/203](#); systems for controlling the direction of light having diffractive elements [G02B 26/0808](#); scanning systems having diffractive elements [G02B 26/106](#); beam shaping systems using diffractive optical elements [G02B 27/0944](#); beam splitting or combining systems operating by diffraction [G02B 27/1086](#)) => consists of non-imaging systems whose application has no dedicated class B1 to B7

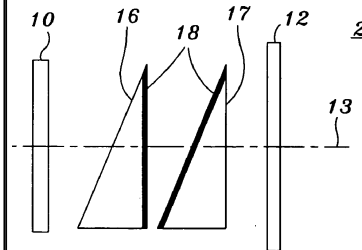*Fig. 2*

e.g. US2007024978: achromatized scanner with rotating prisms (14, 15); due to DOE (18), different wavelengths are scanned at the same angle

[G02B 27/4238](#)

in optical recording or readout devices (optical pick-up devices such as for CD, DVD or BD reader or recorder using diffraction optics [G11B 7/1353](#)) => comprises mostly older documents

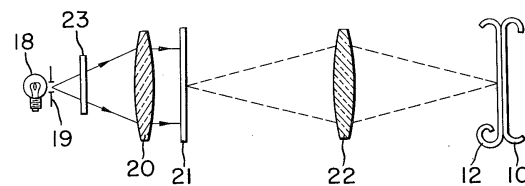
FIG. 5

e.g. US4019817: DOE

(21), color image carrier film (12), monochrome recording film (10); use of diffraction screens (21) for recording colour data as diffraction fringes (10)

[G02B 27/4244](#)

in wavelength selecting devices (spectrometry [G01J](#))

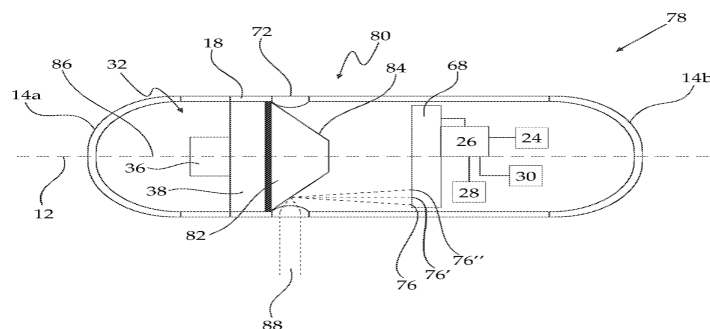


e.g.

WO2011016002: DOE (82) with a conical grating (84) for reflecting light at different wavelength-dependent angles

[G02B 27/425](#)

in illumination systems (mask illumination systems in photolithographic

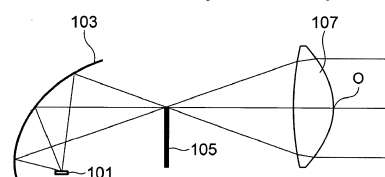


e.g.

US2009310377: projection-type vehicle lamp with a light source (101) and a projector lens (107) comprising a DOE on one of its surfaces

G02B 27/4255

for alignment or positioning purposes (optical displacement encoding scales)

G01D 5/347)

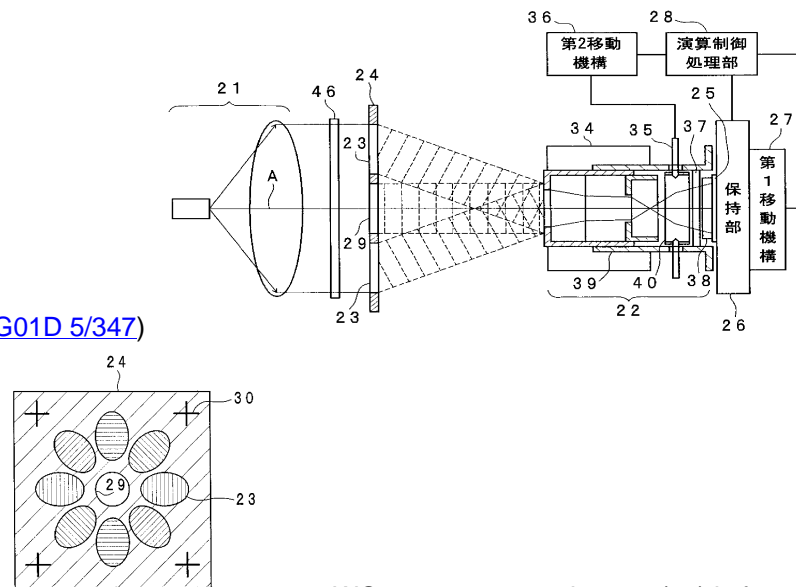

e.g. WO2006028183: substrate (24) is formed with diffraction elements (23); the diffracted light spots are used to align the optical axis of the lens system (22)

G02B 27/4261

having a diffractive element with major polarization




FIG. 1

dependent properties

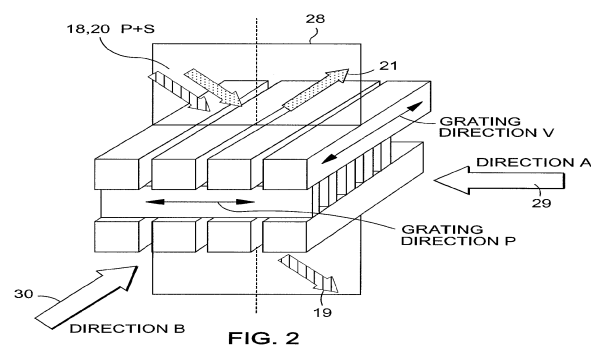


FIG. 2


e.g. US2008117508: polarizing beamsplitter (23) with periodic grating structures (see fig 2)

G02B 27/4266

Diffraction theory; Mathematical models => background on diffractive patterns; diffracted wave propagation; a real DOE is not necessarily present

[G02B 27/4272](#)

having plural diffractive elements positioned sequentially along the optical

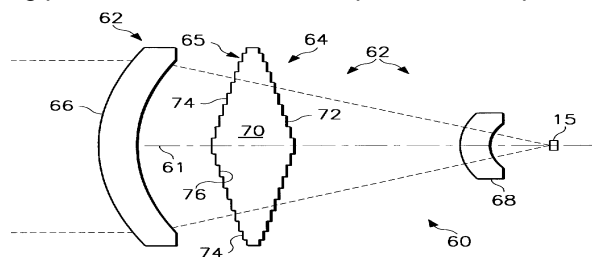

path
FIG. 3
 two sequentially diffracting surfaces (72, 74)


e.g. US5808799:

[G02B 27/4277](#)

•

[G02B 27/4283](#)

having a diffractive element with major temperature dependent properties

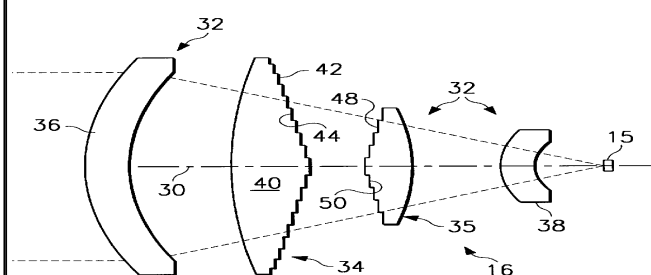
*FIG. 2*

e.g.


US5808799: The diffractive pattern (42) of the athermalization element (34) compensates temperature induced changes in the focal length of the lens assembly (16)

[G02B 27/4288](#)

having uniform diffraction efficiency over a large

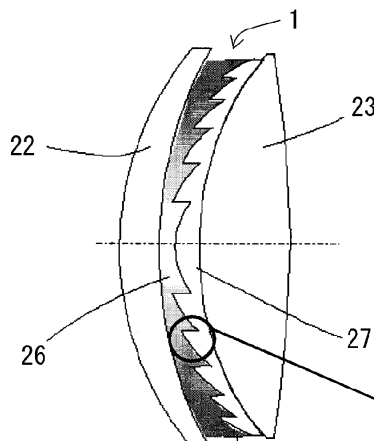

spectral bandwidth

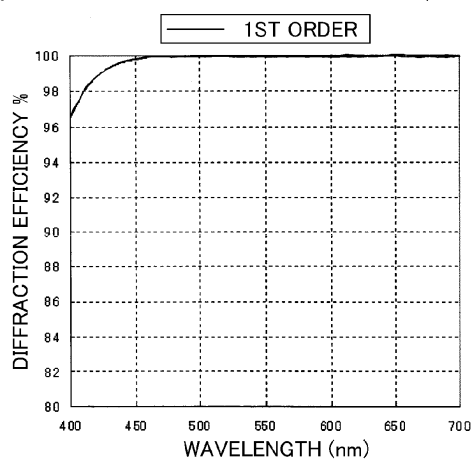

e.g. US2010134889: DOE

(1) with a resin layer (26) and a glass layer (27) having 100% diffraction efficiency over the visible bandwidth

[G02B 27/4294](#)

in multispectral systems, e.g. UV and visible

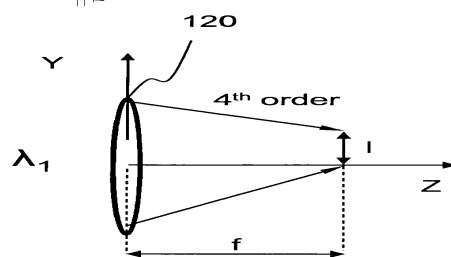
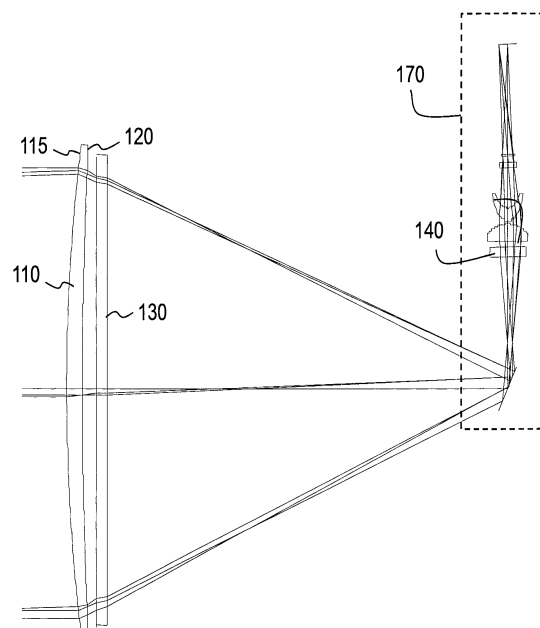


Figure 8A

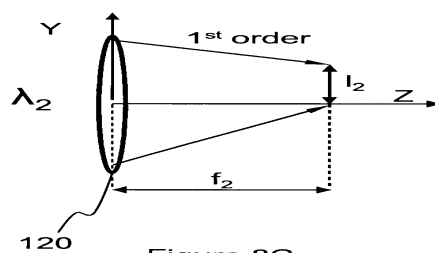


Figure 8C

¹e.g. WO2010100648, imager forming images in two spectral bandwidths (1, 2) and comprising DOE (120), which diffracts light at different diffraction orders

[G02B 27/44](#)

Grating systems: NOT IN USE IN CPC(documents classified in [G02B 27/42](#) and subgroups).